

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428409

Luminaire Tested: SQ2W-PW1-K-075U-100D-L840-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1428409
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-8)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PW1-K-075U-100D-L840-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE WAVES LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8636.5 lumens
Efficiency: N/A
Efficacy: 141.1 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.23
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1428409

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L840-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

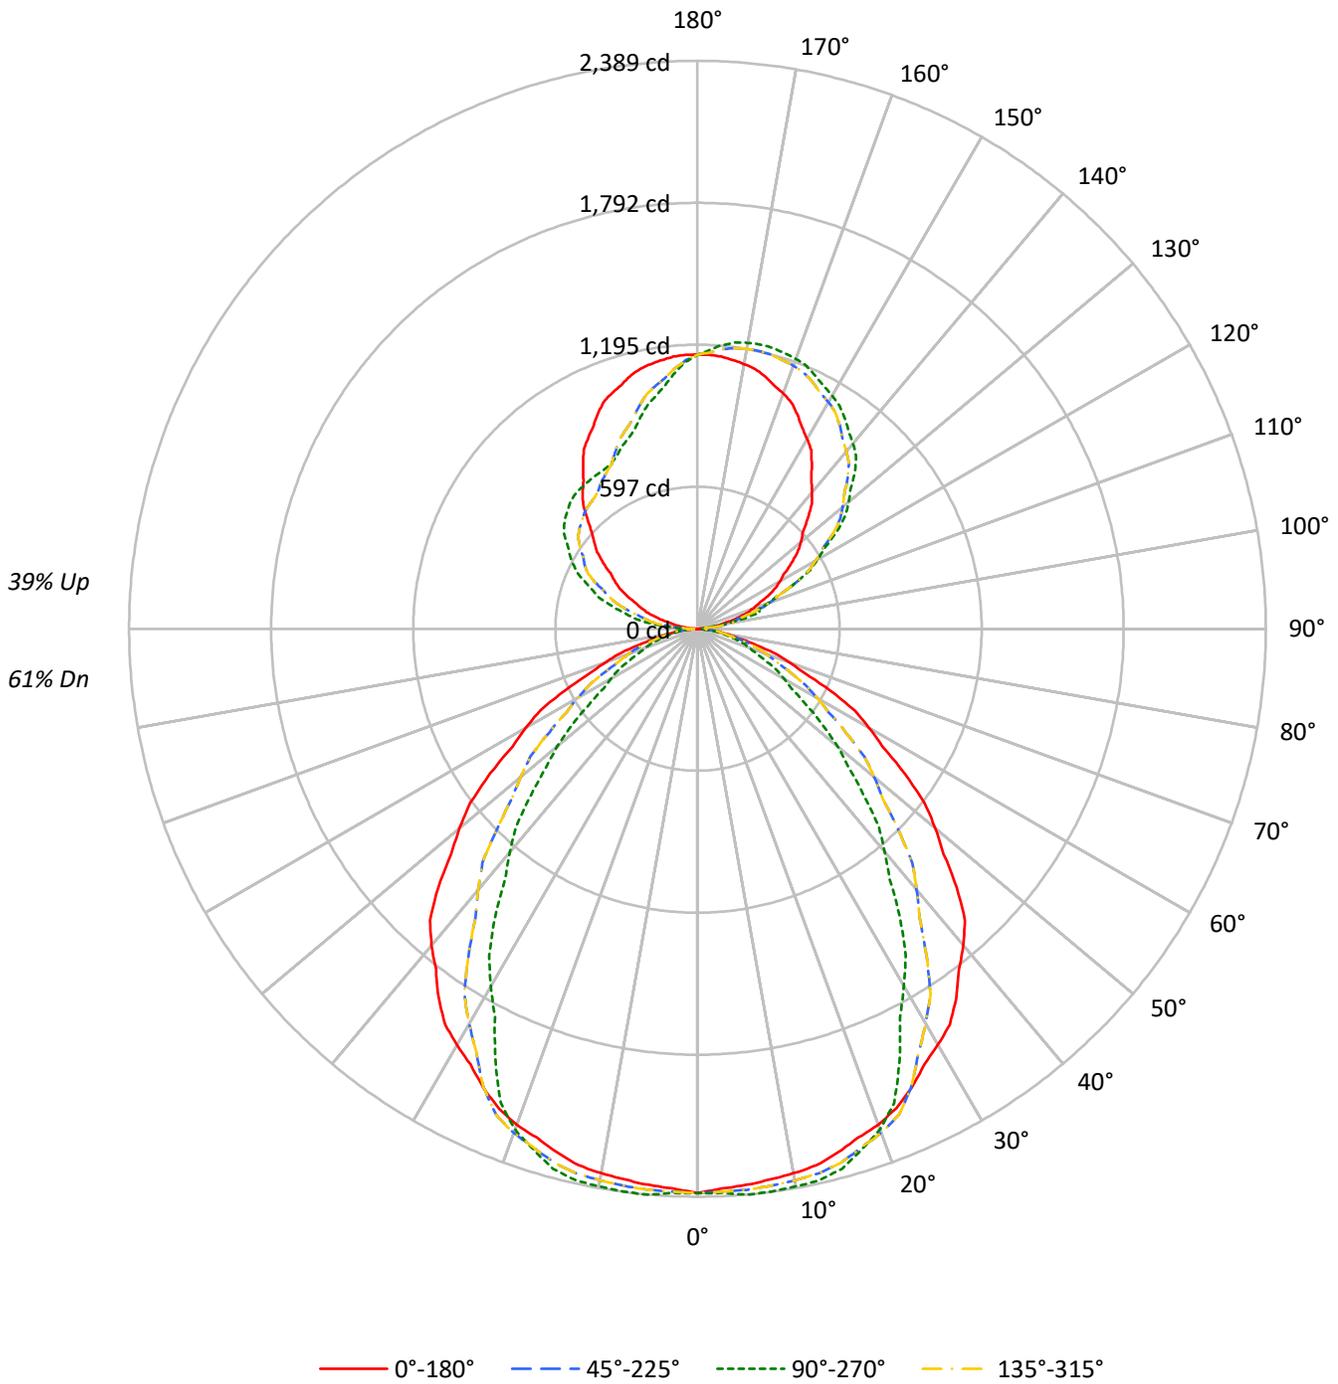



TEST NUMBER: P1428409

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L840-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66	66	66	66	61	
1	101	97	93	90	94	91	88	85	80	77	75	69	68	66	60	58	57	57	57	57	53	
2	93	85	79	75	86	80	75	71	71	67	63	62	59	56	53	51	49	49	49	49	45	
3	85	76	69	63	79	71	65	60	63	58	54	55	51	48	48	45	43	43	43	43	39	
4	78	67	60	54	73	64	57	51	56	51	47	50	45	42	43	40	37	37	37	37	34	
5	72	61	53	47	67	57	50	45	51	45	41	45	40	37	39	36	33	33	33	33	30	
6	66	55	47	41	62	52	44	39	46	40	36	41	36	33	36	32	29	29	29	29	27	
7	62	50	42	36	58	47	40	35	42	36	32	37	33	29	33	29	26	26	26	26	24	
8	57	45	38	32	54	43	36	31	38	33	29	34	30	26	30	27	24	24	24	24	22	
9	54	41	34	29	50	39	33	28	35	30	26	32	27	24	28	24	22	22	22	22	20	
10	50	38	31	26	47	36	30	25	33	27	23	29	25	22	26	22	20	20	20	20	18	

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	38320	38320	38320	38320
5°	38063	38722	38063	38722
10°	38132	39059	38132	39059
15°	38122	39294	38122	39294
20°	38138	38527	38138	38527
25°	37933	35799	37933	35799
30°	37674	32365	37674	32365
35°	37380	29226	37380	29226
40°	36635	25821	36635	25821
45°	35200	22555	35200	22555
50°	32759	19303	32759	19303
55°	29967	15654	29967	15654
60°	26860	13504	26860	13504
65°	23488	12004	23488	12004
70°	19208	10886	19208	10886
75°	14947	10012	14947	10012
80°	11139	8824	11139	8824
85°	7540	5020	7540	5020

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 35200 cd/sqm



TEST NUMBER: P1428409

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L840-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	226.0	2.6
10°-20°	654.8	7.6
20°-30°	963.7	11.2
30°-40°	1053.6	12.2
40°-50°	945.2	10.9
50°-60°	705.1	8.2
60°-70°	445.6	5.2
70°-80°	220.8	2.6
80°-90°	56.4	0.7
90°-100°	91.7	1.1
100°-110°	267.5	3.1
110°-120°	436.5	5.1
120°-130°	553.9	6.4
130°-140°	592.7	6.9
140°-150°	553.5	6.4
150°-160°	455.4	5.3
160°-170°	305.4	3.5
170°-180°	108.5	1.3
0°-30°	1844.5	21.4
0°-40°	2898.1	33.6
0°-60°	4548.4	52.7
0°-90°	5271.2	61.0
90°-120°	795.8	9.2
90°-150°	2495.9	28.9
90°-180°	3365.0	39.0
0°-180°	8636.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2373	2373	2373	2373	2373	
5°	2348	2389	2348	2389	2348	223
15°	2281	2351	2281	2351	2281	644
25°	2129	2010	2129	2010	2129	981
35°	1896	1483	1896	1483	1896	1183
45°	1542	988	1542	988	1542	1182
55°	1065	556	1065	556	1065	951
65°	615	314	615	314	615	609
75°	240	160	240	160	240	264
85°	41	27	41	27	41	52
90°	4	26	4	50	4	4
95°	36	27	36	157	36	44
105°	170	272	170	375	170	181
115°	326	452	326	556	326	321
125°	482	716	482	682	482	431
135°	655	937	655	756	655	506
145°	837	1080	837	772	837	524
155°	994	1174	994	801	994	457
165°	1099	1224	1099	922	1099	309
175°	1149	1198	1149	1082	1149	109
180°	1153	1153	1153	1153	1153	



TEST NUMBER: P1428409

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4
2.5°	2357.1	2370.8	2384.4	2381.2	2372.4	2368.4	2369.2	2370.4	2372.8	2375.2	2372.8
5°	2348.5	2365.6	2382.7	2380.2	2371.1	2367.1	2368.1	2371.1	2380.2	2389.2	2380.2
7.5°	2336.8	2354.1	2371.3	2370.5	2363.7	2362.0	2365.4	2370.2	2379.0	2387.9	2379.0
10°	2325.9	2344.0	2362.1	2362.1	2356.1	2355.6	2360.6	2366.4	2374.4	2382.4	2374.4
12.5°	2311.5	2330.4	2349.2	2350.6	2346.2	2346.9	2352.8	2359.1	2367.2	2375.2	2367.2
15°	2280.7	2300.8	2320.9	2325.2	2324.2	2327.2	2334.2	2340.7	2345.8	2350.8	2345.8
17.5°	2245.0	2265.1	2285.2	2289.2	2287.8	2288.0	2289.8	2291.7	2294.1	2296.5	2294.1
20°	2219.7	2239.8	2259.9	2262.6	2259.6	2254.6	2247.6	2242.3	2242.3	2242.3	2242.3
22.5°	2183.5	2205.2	2226.9	2227.1	2220.0	2207.0	2187.9	2172.0	2165.5	2159.1	2165.5
25°	2129.3	2150.4	2171.5	2161.7	2141.6	2111.9	2072.8	2039.6	2024.5	2009.5	2024.5
27.5°	2066.0	2083.1	2100.1	2074.6	2034.8	1987.1	1931.4	1884.5	1863.6	1842.7	1863.6
30°	2020.8	2033.8	2046.9	2006.5	1948.2	1888.4	1827.1	1776.2	1756.1	1736.0	1756.1
32.5°	1973.8	1978.8	1983.8	1930.5	1857.8	1789.6	1725.9	1672.7	1651.0	1629.3	1651.0
35°	1896.5	1887.4	1878.4	1807.5	1716.1	1638.3	1574.0	1521.0	1501.9	1482.8	1501.9
37.5°	1805.1	1778.2	1751.3	1671.5	1574.0	1491.6	1424.3	1368.6	1347.5	1326.4	1347.5
40°	1738.2	1700.1	1661.9	1576.2	1474.8	1390.4	1323.1	1267.3	1246.2	1225.1	1246.2
42.5°	1664.1	1616.3	1568.5	1480.4	1378.9	1294.5	1227.2	1171.3	1149.4	1127.5	1149.4
45°	1541.6	1485.3	1429.1	1337.4	1233.9	1149.5	1084.2	1030.0	1008.9	987.8	1008.9
47.5°	1403.7	1347.8	1292.0	1200.6	1097.3	1014.0	950.7	898.7	880.6	862.6	880.6
50°	1304.2	1250.0	1195.7	1108.3	1009.9	929.0	865.7	812.7	790.6	768.5	790.6
52.5°	1203.0	1154.4	1105.7	1021.5	925.5	845.0	780.1	723.9	693.8	663.6	693.8
55°	1064.6	1018.4	972.2	892.8	802.4	721.1	648.7	590.2	573.1	556.1	573.1
57.5°	922.2	882.3	842.3	770.9	689.2	615.4	549.7	496.9	482.9	468.8	482.9
60°	831.8	796.7	761.5	693.2	613.8	546.5	491.3	446.3	432.2	418.2	432.2
62.5°	745.0	713.9	682.7	617.2	540.3	479.8	435.8	399.9	388.2	376.6	388.2
65°	614.8	591.7	568.6	514.6	450.3	400.1	363.9	334.3	324.2	314.2	324.2
67.5°	488.2	475.4	462.5	422.1	372.5	331.8	300.0	274.6	267.9	261.3	267.9
70°	406.9	402.8	398.8	365.4	322.2	287.6	261.5	240.6	235.6	230.6	235.6
72.5°	336.3	338.0	339.6	311.8	274.2	245.2	224.7	208.5	205.0	201.6	205.0
75°	239.6	247.6	255.7	237.3	210.2	189.6	175.6	164.5	162.5	160.5	162.5
77.5°	163.2	175.3	187.3	175.4	155.5	140.3	129.9	121.7	120.1	118.4	120.1
80°	119.8	131.9	143.9	135.6	120.6	109.0	101.0	94.9	94.9	94.9	94.9
82.5°	83.6	93.3	102.9	97.0	86.0	78.5	74.4	71.4	71.4	71.4	71.4
85°	40.7	45.7	50.7	49.0	45.0	39.9	33.9	29.1	28.1	27.1	28.1
87.5°	11.5	14.9	18.5	17.0	13.7	11.5	10.7	10.3	10.5	10.5	10.5
90°	3.5	8.1	14.0	18.6	22.1	23.3	23.3	24.4	25.6	25.6	25.6
92.5°	12.8	20.3	20.5	20.5	24.9	27.0	28.9	29.1	30.3	30.3	30.3
95°	36.1	39.6	59.4	58.2	39.6	31.4	26.8	26.8	26.8	26.8	26.8
97.5°	68.9	74.0	77.3	103.6	109.4	105.7	86.2	72.4	64.7	61.2	64.7
100°	97.8	100.1	107.1	108.3	137.4	165.3	151.3	133.9	128.1	124.6	128.1
102.5°	126.7	128.1	138.8	143.7	150.4	166.2	214.7	209.3	205.4	204.7	205.4
105°	170.0	171.1	190.9	200.2	204.9	204.9	203.7	227.0	264.3	272.4	264.3
107.5°	216.3	221.7	244.9	269.9	275.2	276.6	270.6	267.1	265.7	266.6	265.7
110°	248.0	256.1	284.1	315.5	323.6	326.0	323.6	320.2	317.8	317.8	317.8

TEST NUMBER: P1428409

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	278.7	290.6	322.3	358.3	372.1	379.1	373.9	371.4	369.1	370.9	369.1
115°	326.0	343.4	385.4	422.6	450.5	454.0	452.9	452.9	451.7	451.7	451.7
117.5°	369.7	397.7	444.7	488.0	520.4	529.7	534.4	533.0	531.6	533.9	531.6
120°	400.5	433.1	486.6	535.5	567.0	580.9	585.6	583.3	585.6	583.3	585.6
122.5°	433.1	473.1	525.8	576.5	613.5	629.4	635.0	635.4	635.9	634.5	635.9
125°	482.0	530.9	592.6	645.0	683.4	702.0	706.7	707.8	710.2	716.0	710.2
127.5°	531.3	586.8	654.5	705.0	744.4	767.0	774.2	776.8	781.6	784.2	781.6
130°	565.8	628.7	697.4	745.1	783.5	808.0	820.8	824.3	830.1	828.9	830.1
132.5°	602.1	667.8	737.4	787.0	822.6	848.9	859.9	869.9	872.0	873.6	872.0
135°	655.4	726.5	796.3	845.2	879.0	904.6	918.6	927.9	933.7	937.2	933.7
137.5°	711.6	786.5	853.6	897.1	931.1	953.2	969.1	978.9	984.9	987.7	984.9
140°	749.7	821.9	887.1	932.5	962.8	984.9	998.9	1010.5	1017.5	1017.5	1017.5
142.5°	786.1	857.3	920.6	966.1	992.6	1012.9	1027.8	1036.6	1044.5	1044.5	1044.5
145°	837.1	908.1	966.3	1011.7	1033.8	1052.4	1068.7	1075.7	1080.4	1080.4	1080.4
147.5°	890.4	953.2	1006.3	1049.9	1068.5	1090.4	1103.2	1108.8	1114.6	1112.0	1114.6
150°	922.0	980.3	1031.5	1072.2	1090.9	1111.8	1124.6	1129.3	1135.1	1131.6	1135.1
152.5°	952.8	1008.2	1054.8	1092.7	1108.6	1129.5	1144.2	1148.8	1152.8	1150.2	1152.8
155°	994.2	1043.1	1086.2	1121.1	1135.1	1154.9	1168.9	1174.7	1179.3	1173.5	1179.3
157.5°	1031.2	1073.4	1110.9	1143.0	1157.9	1174.9	1187.9	1195.2	1199.8	1197.3	1199.8
160°	1053.6	1092.0	1125.8	1156.1	1170.0	1185.2	1199.1	1207.3	1211.9	1208.4	1211.9
162.5°	1072.2	1106.9	1138.8	1166.3	1178.4	1191.7	1208.4	1215.7	1220.3	1215.9	1220.3
165°	1099.0	1126.9	1154.9	1178.2	1188.6	1199.1	1216.6	1224.7	1228.2	1223.6	1228.2
167.5°	1119.3	1140.7	1163.3	1183.3	1191.0	1201.2	1218.7	1225.4	1229.9	1224.0	1229.9
170°	1130.4	1149.1	1168.9	1185.2	1191.0	1200.3	1217.8	1223.6	1227.1	1221.2	1227.1
172.5°	1139.8	1153.7	1169.8	1184.2	1187.3	1194.7	1211.2	1217.1	1219.6	1214.7	1219.6
175°	1149.1	1157.2	1168.9	1178.2	1177.0	1181.7	1195.6	1200.3	1204.9	1198.0	1204.9
177.5°	1153.5	1157.2	1160.9	1166.5	1162.8	1162.8	1173.0	1175.8	1176.8	1173.0	1176.8
180°	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6



TEST NUMBER: P1428409

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4
2.5°	2370.4	2369.2	2368.4	2372.4	2381.2	2384.4	2370.8	2357.1	2370.8	2384.4	2381.2
5°	2371.1	2368.1	2367.1	2371.1	2380.2	2382.7	2365.6	2348.5	2365.6	2382.7	2380.2
7.5°	2370.2	2365.4	2362.0	2363.7	2370.5	2371.3	2354.1	2336.8	2354.1	2371.3	2370.5
10°	2366.4	2360.6	2355.6	2356.1	2362.1	2362.1	2344.0	2325.9	2344.0	2362.1	2362.1
12.5°	2359.1	2352.8	2346.9	2346.2	2350.6	2349.2	2330.4	2311.5	2330.4	2349.2	2350.6
15°	2340.7	2334.2	2327.2	2324.2	2325.2	2320.9	2300.8	2280.7	2300.8	2320.9	2325.2
17.5°	2291.7	2289.8	2288.0	2287.8	2289.2	2285.2	2265.1	2245.0	2265.1	2285.2	2289.2
20°	2242.3	2247.6	2254.6	2259.6	2262.6	2259.9	2239.8	2219.7	2239.8	2259.9	2262.6
22.5°	2172.0	2187.9	2207.0	2220.0	2227.1	2226.9	2205.2	2183.5	2205.2	2226.9	2227.1
25°	2039.6	2072.8	2111.9	2141.6	2161.7	2171.5	2150.4	2129.3	2150.4	2171.5	2161.7
27.5°	1884.5	1931.4	1987.1	2034.8	2074.6	2100.1	2083.1	2066.0	2083.1	2100.1	2074.6
30°	1776.2	1827.1	1888.4	1948.2	2006.5	2046.9	2033.8	2020.8	2033.8	2046.9	2006.5
32.5°	1672.7	1725.9	1789.6	1857.8	1930.5	1983.8	1978.8	1973.8	1978.8	1983.8	1930.5
35°	1521.0	1574.0	1638.3	1716.1	1807.5	1878.4	1887.4	1896.5	1887.4	1878.4	1807.5
37.5°	1368.6	1424.3	1491.6	1574.0	1671.5	1751.3	1778.2	1805.1	1778.2	1751.3	1671.5
40°	1267.3	1323.1	1390.4	1474.8	1576.2	1661.9	1700.1	1738.2	1700.1	1661.9	1576.2
42.5°	1171.3	1227.2	1294.5	1378.9	1480.4	1568.5	1616.3	1664.1	1616.3	1568.5	1480.4
45°	1030.0	1084.2	1149.5	1233.9	1337.4	1429.1	1485.3	1541.6	1485.3	1429.1	1337.4
47.5°	898.7	950.7	1014.0	1097.3	1200.6	1292.0	1347.8	1403.7	1347.8	1292.0	1200.6
50°	812.7	865.7	929.0	1009.9	1108.3	1195.7	1250.0	1304.2	1250.0	1195.7	1108.3
52.5°	723.9	780.1	845.0	925.5	1021.5	1105.7	1154.4	1203.0	1154.4	1105.7	1021.5
55°	590.2	648.7	721.1	802.4	892.8	972.2	1018.4	1064.6	1018.4	972.2	892.8
57.5°	496.9	549.7	615.4	689.2	770.9	842.3	882.3	922.2	882.3	842.3	770.9
60°	446.3	491.3	546.5	613.8	693.2	761.5	796.7	831.8	796.7	761.5	693.2
62.5°	399.9	435.8	479.8	540.3	617.2	682.7	713.9	745.0	713.9	682.7	617.2
65°	334.3	363.9	400.1	450.3	514.6	568.6	591.7	614.8	591.7	568.6	514.6
67.5°	274.6	300.0	331.8	372.5	422.1	462.5	475.4	488.2	475.4	462.5	422.1
70°	240.6	261.5	287.6	322.2	365.4	398.8	402.8	406.9	402.8	398.8	365.4
72.5°	208.5	224.7	245.2	274.2	311.8	339.6	338.0	336.3	338.0	339.6	311.8
75°	164.5	175.6	189.6	210.2	237.3	255.7	247.6	239.6	247.6	255.7	237.3
77.5°	121.7	129.9	140.3	155.5	175.4	187.3	175.3	163.2	175.3	187.3	175.4
80°	94.9	101.0	109.0	120.6	135.6	143.9	131.9	119.8	131.9	143.9	135.6
82.5°	71.4	74.4	78.5	86.0	97.0	102.9	93.3	83.6	93.3	102.9	97.0
85°	29.1	33.9	39.9	45.0	49.0	50.7	45.7	40.7	45.7	50.7	49.0
87.5°	10.3	10.7	11.5	13.7	17.0	18.5	14.9	11.5	14.9	18.2	17.5
90°	24.4	23.3	23.3	22.1	18.6	14.0	8.1	3.5	8.1	12.8	21.0
92.5°	29.1	28.9	27.0	24.9	20.5	20.5	20.3	12.8	22.1	31.4	45.2
95°	26.8	26.8	31.4	39.6	58.2	59.4	39.6	36.1	51.2	72.2	90.8
97.5°	72.4	86.2	105.7	109.4	103.6	77.3	74.0	68.9	93.8	114.6	144.6
100°	133.9	151.3	165.3	137.4	108.3	107.1	100.1	97.8	124.6	144.4	173.5
102.5°	209.3	214.7	166.2	150.4	143.7	138.8	128.1	126.7	153.4	180.7	205.1
105°	227.0	203.7	204.9	204.9	200.2	190.9	171.1	170.0	200.2	231.7	261.9
107.5°	267.1	270.6	276.6	275.2	269.9	244.9	221.7	216.3	243.6	281.3	314.6
110°	320.2	323.6	326.0	323.6	315.5	284.1	256.1	248.0	272.4	312.0	348.1



TEST NUMBER: P1428409

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	371.4	373.9	379.1	372.1	358.3	322.3	290.6	278.7	303.2	343.7	380.7
115°	452.9	452.9	454.0	450.5	422.6	385.4	343.4	326.0	346.9	384.2	424.9
117.5°	533.0	534.4	529.7	520.4	488.0	444.7	397.7	369.7	386.3	425.6	467.5
120°	583.3	585.6	580.9	567.0	535.5	486.6	433.1	400.5	413.3	451.7	493.6
122.5°	635.4	635.0	629.4	613.5	576.5	525.8	473.1	433.1	438.4	474.1	515.0
125°	707.8	706.7	702.0	683.4	645.0	592.6	530.9	482.0	475.0	505.3	547.2
127.5°	776.8	774.2	767.0	744.4	705.0	654.5	586.8	531.3	515.7	534.8	573.3
130°	824.3	820.8	808.0	783.5	745.1	697.4	628.7	565.8	543.7	555.3	589.1
132.5°	869.9	859.9	848.9	822.6	787.0	737.4	667.8	602.1	571.6	576.7	603.1
135°	927.9	918.6	904.6	879.0	845.2	796.3	726.5	655.4	613.5	608.9	624.0
137.5°	978.9	969.1	953.2	931.1	897.1	853.6	786.5	711.6	658.7	643.1	648.9
140°	1010.5	998.9	984.9	962.8	932.5	887.1	821.9	749.7	690.4	668.3	664.8
142.5°	1036.6	1027.8	1012.9	992.6	966.1	920.6	857.3	786.1	723.0	694.3	686.2
145°	1075.7	1068.7	1052.4	1033.8	1011.7	966.3	908.1	837.1	774.2	736.9	719.5
147.5°	1108.8	1103.2	1090.4	1068.5	1049.9	1006.3	953.2	890.4	825.9	779.8	757.2
150°	1129.3	1124.6	1111.8	1090.9	1072.2	1031.5	980.3	922.0	860.3	811.4	782.3
152.5°	1148.8	1144.2	1129.5	1108.6	1092.7	1054.8	1008.2	952.8	890.1	841.3	811.2
155°	1174.7	1168.9	1154.9	1135.1	1121.1	1086.2	1043.1	994.2	940.7	889.4	855.7
157.5°	1195.2	1187.9	1174.9	1157.9	1143.0	1110.9	1073.4	1031.2	984.4	935.6	901.1
160°	1207.3	1199.1	1185.2	1170.0	1156.1	1125.8	1092.0	1053.6	1010.5	966.3	929.0
162.5°	1215.7	1208.4	1191.7	1178.4	1166.3	1138.8	1106.9	1072.2	1033.8	995.2	960.7
165°	1224.7	1216.6	1199.1	1188.6	1178.2	1154.9	1126.9	1099.0	1066.4	1035.0	1007.0
167.5°	1225.4	1218.7	1201.2	1191.0	1183.3	1163.3	1140.7	1119.3	1093.9	1069.2	1045.9
170°	1223.6	1217.8	1200.3	1191.0	1185.2	1168.9	1149.1	1130.4	1110.6	1089.7	1071.1
172.5°	1217.1	1211.2	1194.7	1187.3	1184.2	1169.8	1153.7	1139.8	1122.8	1107.4	1092.5
175°	1200.3	1195.6	1181.7	1177.0	1178.2	1168.9	1157.2	1149.1	1138.6	1129.3	1121.1
177.5°	1175.8	1173.0	1162.8	1162.8	1166.5	1160.9	1157.2	1153.5	1148.8	1146.0	1143.2
180°	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6



TEST NUMBER: P1428409

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4	2373.4
2.5°	2372.4	2368.4	2369.2	2370.4	2372.8	2375.2	2372.8	2370.4	2369.2	2368.4	2372.4
5°	2371.1	2367.1	2368.1	2371.1	2380.2	2389.2	2380.2	2371.1	2368.1	2367.1	2371.1
7.5°	2363.7	2362.0	2365.4	2370.2	2379.0	2387.9	2379.0	2370.2	2365.4	2362.0	2363.7
10°	2356.1	2355.6	2360.6	2366.4	2374.4	2382.4	2374.4	2366.4	2360.6	2355.6	2356.1
12.5°	2346.2	2346.9	2352.8	2359.1	2367.2	2375.2	2367.2	2359.1	2352.8	2346.9	2346.2
15°	2324.2	2327.2	2334.2	2340.7	2345.8	2350.8	2345.8	2340.7	2334.2	2327.2	2324.2
17.5°	2287.8	2288.0	2289.8	2291.7	2294.1	2296.5	2294.1	2291.7	2289.8	2288.0	2287.8
20°	2259.6	2254.6	2247.6	2242.3	2242.3	2242.3	2242.3	2242.3	2247.6	2254.6	2259.6
22.5°	2220.0	2207.0	2187.9	2172.0	2165.5	2159.1	2165.5	2172.0	2187.9	2207.0	2220.0
25°	2141.6	2111.9	2072.8	2039.6	2024.5	2009.5	2024.5	2039.6	2072.8	2111.9	2141.6
27.5°	2034.8	1987.1	1931.4	1884.5	1863.6	1842.7	1863.6	1884.5	1931.4	1987.1	2034.8
30°	1948.2	1888.4	1827.1	1776.2	1756.1	1736.0	1756.1	1776.2	1827.1	1888.4	1948.2
32.5°	1857.8	1789.6	1725.9	1672.7	1651.0	1629.3	1651.0	1672.7	1725.9	1789.6	1857.8
35°	1716.1	1638.3	1574.0	1521.0	1501.9	1482.8	1501.9	1521.0	1574.0	1638.3	1716.1
37.5°	1574.0	1491.6	1424.3	1368.6	1347.5	1326.4	1347.5	1368.6	1424.3	1491.6	1574.0
40°	1474.8	1390.4	1323.1	1267.3	1246.2	1225.1	1246.2	1267.3	1323.1	1390.4	1474.8
42.5°	1378.9	1294.5	1227.2	1171.3	1149.4	1127.5	1149.4	1171.3	1227.2	1294.5	1378.9
45°	1233.9	1149.5	1084.2	1030.0	1008.9	987.8	1008.9	1030.0	1084.2	1149.5	1233.9
47.5°	1097.3	1014.0	950.7	898.7	880.6	862.6	880.6	898.7	950.7	1014.0	1097.3
50°	1009.9	929.0	865.7	812.7	790.6	768.5	790.6	812.7	865.7	929.0	1009.9
52.5°	925.5	845.0	780.1	723.9	693.8	663.6	693.8	723.9	780.1	845.0	925.5
55°	802.4	721.1	648.7	590.2	573.1	556.1	573.1	590.2	648.7	721.1	802.4
57.5°	689.2	615.4	549.7	496.9	482.9	468.8	482.9	496.9	549.7	615.4	689.2
60°	613.8	546.5	491.3	446.3	432.2	418.2	432.2	446.3	491.3	546.5	613.8
62.5°	540.3	479.8	435.8	399.9	388.2	376.6	388.2	399.9	435.8	479.8	540.3
65°	450.3	400.1	363.9	334.3	324.2	314.2	324.2	334.3	363.9	400.1	450.3
67.5°	372.5	331.8	300.0	274.6	267.9	261.3	267.9	274.6	300.0	331.8	372.5
70°	322.2	287.6	261.5	240.6	235.6	230.6	235.6	240.6	261.5	287.6	322.2
72.5°	274.2	245.2	224.7	208.5	205.0	201.6	205.0	208.5	224.7	245.2	274.2
75°	210.2	189.6	175.6	164.5	162.5	160.5	162.5	164.5	175.6	189.6	210.2
77.5°	155.5	140.3	129.9	121.7	120.1	118.4	120.1	121.7	129.9	140.3	155.5
80°	120.6	109.0	101.0	94.9	94.9	94.9	94.9	94.9	101.0	109.0	120.6
82.5°	86.0	78.5	74.4	71.4	71.4	71.4	71.4	71.4	74.4	78.5	86.0
85°	45.0	39.9	33.9	29.1	28.1	27.1	28.1	29.1	33.9	39.9	45.0
87.5°	14.6	13.8	14.6	15.0	15.9	15.4	15.9	15.0	14.6	13.8	14.6
90°	26.8	34.9	43.1	47.7	52.4	50.1	52.4	47.7	43.1	34.9	26.8
92.5°	53.8	67.5	77.5	85.9	89.6	89.2	89.6	85.9	77.5	67.5	53.8
95°	108.3	124.6	140.9	152.5	159.5	157.2	159.5	152.5	140.9	124.6	108.3
97.5°	166.9	188.8	207.0	217.9	224.9	229.6	224.9	217.9	207.0	188.8	166.9
100°	206.1	227.0	248.0	260.8	272.4	277.1	272.4	260.8	248.0	227.0	206.1
102.5°	237.7	265.2	288.0	301.8	311.5	316.2	311.5	301.8	288.0	265.2	237.7
105°	289.9	319.0	343.4	360.9	371.4	374.9	371.4	360.9	343.4	319.0	289.9
107.5°	342.0	372.1	394.7	414.0	426.8	434.2	426.8	414.0	394.7	372.1	342.0
110°	383.0	407.5	431.9	449.4	462.2	466.8	462.2	449.4	431.9	407.5	383.0



TEST NUMBER: P1428409

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	417.5	444.7	469.2	486.6	501.3	507.8	501.3	486.6	469.2	444.7	417.5
115°	465.7	501.8	523.9	540.2	550.7	556.5	550.7	540.2	523.9	501.8	465.7
117.5°	505.7	543.4	567.7	580.2	585.1	589.3	585.1	580.2	567.7	543.4	505.7
120°	530.9	565.8	593.7	610.0	615.9	618.2	615.9	610.0	593.7	565.8	530.9
122.5°	554.2	587.2	614.2	634.3	643.8	646.1	643.8	634.3	614.2	587.2	554.2
125°	586.8	618.2	646.1	665.9	676.4	682.2	676.4	665.9	646.1	618.2	586.8
127.5°	615.2	649.2	674.8	692.7	702.9	707.6	702.9	692.7	674.8	649.2	615.2
130°	631.0	665.9	691.5	711.3	720.6	725.3	720.6	711.3	691.5	665.9	631.0
132.5°	643.1	679.9	706.4	724.4	734.6	739.3	734.6	724.4	706.4	679.9	643.1
135°	657.8	696.2	724.1	741.6	750.9	755.6	750.9	741.6	724.1	696.2	657.8
137.5°	670.6	705.5	734.6	753.0	761.4	764.4	761.4	753.0	734.6	705.5	670.6
140°	679.9	710.2	739.3	756.7	766.0	767.2	766.0	756.7	739.3	710.2	679.9
142.5°	692.0	715.7	741.1	758.6	767.9	770.0	767.9	758.6	741.1	715.7	692.0
145°	713.7	727.6	745.1	761.4	769.5	771.9	769.5	761.4	745.1	727.6	713.7
147.5°	740.9	745.3	754.4	765.1	773.0	774.7	773.0	765.1	754.4	745.3	740.9
150°	761.4	760.2	763.7	770.7	777.7	776.5	777.7	770.7	763.7	760.2	761.4
152.5°	784.7	777.9	777.7	780.9	784.2	784.0	784.2	780.9	777.7	777.9	784.7
155°	824.3	811.4	804.5	802.1	802.1	801.0	802.1	802.1	804.5	811.4	824.3
157.5°	867.8	849.9	839.4	833.8	832.2	829.6	832.2	833.8	839.4	849.9	867.8
160°	897.6	877.8	867.3	858.0	854.5	851.0	854.5	858.0	867.3	877.8	897.6
162.5°	925.5	906.7	895.3	886.9	883.4	878.0	883.4	886.9	895.3	906.7	925.5
165°	970.9	951.2	938.3	931.4	926.7	922.0	926.7	931.4	938.3	951.2	970.9
167.5°	1016.3	994.7	986.3	978.4	974.0	965.6	974.0	978.4	986.3	994.7	1016.3
170°	1044.3	1024.5	1019.8	1012.9	1004.7	995.4	1004.7	1012.9	1019.8	1024.5	1044.3
172.5°	1068.5	1055.2	1050.6	1043.6	1041.0	1033.6	1041.0	1043.6	1050.6	1055.2	1068.5
175°	1103.7	1093.2	1093.2	1092.0	1088.5	1081.5	1088.5	1092.0	1093.2	1093.2	1103.7
177.5°	1133.0	1127.4	1131.1	1131.1	1130.2	1123.7	1130.2	1131.1	1131.1	1127.4	1133.0
180°	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6



TEST NUMBER: P1428409

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	2373.4	2373.4	2373.4	2373.4
2.5°	2381.2	2384.4	2370.8	2357.1
5°	2380.2	2382.7	2365.6	2348.5
7.5°	2370.5	2371.3	2354.1	2336.8
10°	2362.1	2362.1	2344.0	2325.9
12.5°	2350.6	2349.2	2330.4	2311.5
15°	2325.2	2320.9	2300.8	2280.7
17.5°	2289.2	2285.2	2265.1	2245.0
20°	2262.6	2259.9	2239.8	2219.7
22.5°	2227.1	2226.9	2205.2	2183.5
25°	2161.7	2171.5	2150.4	2129.3
27.5°	2074.6	2100.1	2083.1	2066.0
30°	2006.5	2046.9	2033.8	2020.8
32.5°	1930.5	1983.8	1978.8	1973.8
35°	1807.5	1878.4	1887.4	1896.5
37.5°	1671.5	1751.3	1778.2	1805.1
40°	1576.2	1661.9	1700.1	1738.2
42.5°	1480.4	1568.5	1616.3	1664.1
45°	1337.4	1429.1	1485.3	1541.6
47.5°	1200.6	1292.0	1347.8	1403.7
50°	1108.3	1195.7	1250.0	1304.2
52.5°	1021.5	1105.7	1154.4	1203.0
55°	892.8	972.2	1018.4	1064.6
57.5°	770.9	842.3	882.3	922.2
60°	693.2	761.5	796.7	831.8
62.5°	617.2	682.7	713.9	745.0
65°	514.6	568.6	591.7	614.8
67.5°	422.1	462.5	475.4	488.2
70°	365.4	398.8	402.8	406.9
72.5°	311.8	339.6	338.0	336.3
75°	237.3	255.7	247.6	239.6
77.5°	175.4	187.3	175.3	163.2
80°	135.6	143.9	131.9	119.8
82.5°	97.0	102.9	93.3	83.6
85°	49.0	50.7	45.7	40.7
87.5°	17.5	18.2	14.9	11.5
90°	21.0	12.8	8.1	3.5
92.5°	45.2	31.4	22.1	12.8
95°	90.8	72.2	51.2	36.1
97.5°	144.6	114.6	93.8	68.9
100°	173.5	144.4	124.6	97.8
102.5°	205.1	180.7	153.4	126.7
105°	261.9	231.7	200.2	170.0
107.5°	314.6	281.3	243.6	216.3
110°	348.1	312.0	272.4	248.0

TEST NUMBER: P1428409

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	380.7	343.7	303.2	278.7
115°	424.9	384.2	346.9	326.0
117.5°	467.5	425.6	386.3	369.7
120°	493.6	451.7	413.3	400.5
122.5°	515.0	474.1	438.4	433.1
125°	547.2	505.3	475.0	482.0
127.5°	573.3	534.8	515.7	531.3
130°	589.1	555.3	543.7	565.8
132.5°	603.1	576.7	571.6	602.1
135°	624.0	608.9	613.5	655.4
137.5°	648.9	643.1	658.7	711.6
140°	664.8	668.3	690.4	749.7
142.5°	686.2	694.3	723.0	786.1
145°	719.5	736.9	774.2	837.1
147.5°	757.2	779.8	825.9	890.4
150°	782.3	811.4	860.3	922.0
152.5°	811.2	841.3	890.1	952.8
155°	855.7	889.4	940.7	994.2
157.5°	901.1	935.6	984.4	1031.2
160°	929.0	966.3	1010.5	1053.6
162.5°	960.7	995.2	1033.8	1072.2
165°	1007.0	1035.0	1066.4	1099.0
167.5°	1045.9	1069.2	1093.9	1119.3
170°	1071.1	1089.7	1110.6	1130.4
172.5°	1092.5	1107.4	1122.8	1139.8
175°	1121.1	1129.3	1138.6	1149.1
177.5°	1143.2	1146.0	1148.8	1153.5
180°	1152.6	1152.6	1152.6	1152.6



TEST NUMBER: P1428409
 CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L840-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.56	21.48	21.42	22.36	23.47	16.80	17.73	17.67	18.61	19.71
	3H	21.86	22.69	22.74	23.58	24.71	18.08	18.90	18.96	19.79	20.93
	4H	22.27	23.05	23.17	23.95	25.09	18.59	19.36	19.48	20.26	21.40
	6H	22.46	23.17	23.36	24.07	25.23	18.90	19.61	19.80	20.52	21.67
	8H	22.50	23.18	23.41	24.10	25.26	19.02	19.69	19.93	20.61	21.77
	12H	22.50	23.15	23.42	24.06	25.25	19.05	19.69	19.96	20.61	21.79
4H	2H	20.70	21.47	21.59	22.37	23.51	17.62	18.40	18.52	19.29	20.44
	3H	22.24	22.88	23.15	23.81	24.97	19.07	19.72	19.98	20.65	21.80
	4H	22.79	23.37	23.71	24.30	25.48	19.66	20.24	20.57	21.16	22.35
	6H	23.10	23.61	24.04	24.55	25.74	20.04	20.55	20.98	21.49	22.68
	8H	23.20	23.67	24.13	24.61	25.81	20.19	20.66	21.13	21.61	22.80
	12H	23.22	23.64	24.18	24.60	25.81	20.24	20.66	21.19	21.62	22.83
8H	4H	22.83	23.30	23.77	24.24	25.44	20.00	20.47	20.94	21.41	22.61
	6H	23.26	23.64	24.22	24.63	25.83	20.50	20.89	21.46	21.87	23.07
	8H	23.43	23.77	24.40	24.74	25.96	20.72	21.06	21.69	22.03	23.25
	12H	23.51	23.81	24.48	24.77	26.04	20.80	21.10	21.78	22.07	23.34
12H	4H	22.79	23.22	23.75	24.18	25.38	20.02	20.45	20.98	21.41	22.61
	6H	23.25	23.59	24.22	24.57	25.78	20.57	20.92	21.54	21.89	23.11
	8H	23.44	23.74	24.42	24.71	25.98	20.82	21.12	21.79	22.09	23.35