

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427545

Luminaire Tested: SQ2W-BBM-K-125U-050D-L940-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2024
Report Number: P1427545
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G3-2104-222-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-BBM-K-125U-050D-L940-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - BLACK DISCREET BAFFLE, MEDIUM 80-DEGREE OPTIC
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7316.0 lumens
Efficiency: N/A
Efficacy: 117.8 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.17 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 62.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427545

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L940-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

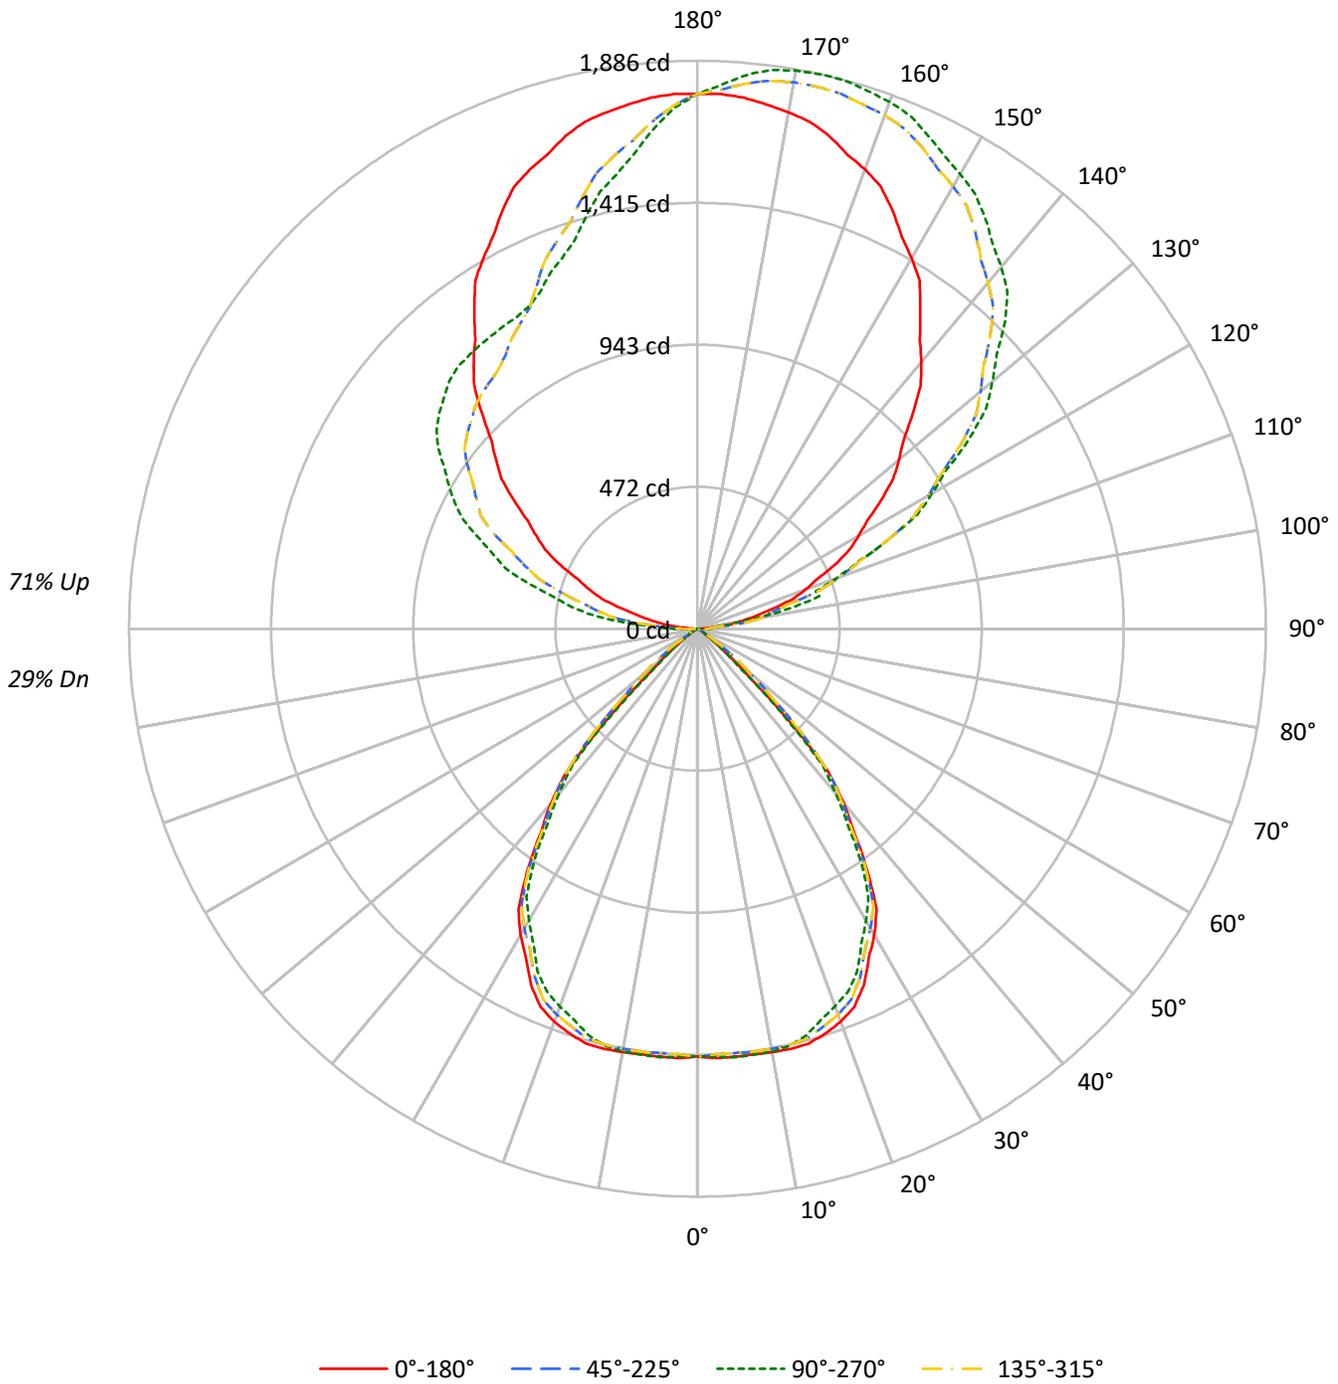



TEST NUMBER: P1427545

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L940-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	37	37	37	29
1	94	90	87	84	84	81	79	76	64	63	61	49	48	47	34	34	33	27
2	87	80	75	71	78	73	68	64	58	55	52	44	42	41	32	31	30	24
3	80	72	65	60	72	65	60	55	52	48	45	40	38	36	29	28	27	22
4	74	64	57	52	66	58	52	48	47	43	40	37	34	32	27	26	24	20
5	68	58	51	45	61	53	46	42	43	38	35	33	31	28	25	23	22	18
6	63	52	45	40	57	48	41	37	39	34	31	31	28	25	23	21	20	17
7	58	47	40	35	53	43	37	33	36	31	28	28	25	23	21	20	18	15
8	54	43	36	31	49	40	33	29	33	28	25	26	23	21	20	18	17	14
9	51	40	33	28	46	36	30	26	30	26	23	24	21	19	18	17	15	13
10	47	36	30	25	43	33	28	24	28	23	20	22	19	17	17	15	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	22936	22936	22936	22936
5°	23116	23152	23116	23152
10°	23407	23372	23407	23372
15°	23829	23354	23829	23354
20°	23860	22931	23860	22931
25°	23269	22357	23269	22357
30°	21874	20854	21874	20854
35°	19414	18685	19414	18685
40°	15921	15068	15921	15068
45°	9492	8910	9492	8910
50°	2964	2803	2964	2803
55°	1120	1120	1120	1120
60°	68	23	68	23
65°	0	0	0	0
70°	0	0	0	0
75°	0	0	0	0
80°	0	0	0	0
85°	0	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 11113 cd/sqm



TEST NUMBER: P1427545

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L940-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	135.8	1.9
10°-20°	397.9	5.4
20°-30°	585.4	8.0
30°-40°	598.3	8.2
40°-50°	344.7	4.7
50°-60°	59.3	0.8
60°-70°	2.1	0.0
70°-80°	0.0	0.0
80°-90°	9.4	0.1
90°-100°	141.3	1.9
100°-110°	412.2	5.6
110°-120°	672.6	9.2
120°-130°	853.5	11.7
130°-140°	913.3	12.5
140°-150°	852.8	11.7
150°-160°	701.7	9.6
160°-170°	470.6	6.4
170°-180°	167.1	2.3
0°-30°	1119.1	15.3
0°-40°	1717.4	23.5
0°-60°	2121.4	29.0
0°-90°	2132.9	29.2
90°-120°	1226.1	16.8
90°-150°	3845.7	52.6
90°-180°	5185.0	70.9
0°-180°	7316.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1421	1421	1421	1421	1421	
5°	1426	1428	1426	1428	1426	136
15°	1426	1397	1426	1397	1426	401
25°	1306	1255	1306	1255	1306	596
35°	985	948	985	948	985	608
45°	416	390	416	390	416	322
55°	40	40	40	40	40	42
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	5	40	5	77	5	4
95°	56	41	56	242	56	67
105°	262	420	262	578	262	279
115°	502	696	502	857	502	495
125°	743	1103	743	1051	743	664
135°	1010	1444	1010	1164	1010	780
145°	1290	1665	1290	1189	1290	807
155°	1532	1808	1532	1234	1532	704
165°	1693	1885	1693	1421	1693	477
175°	1770	1846	1770	1666	1770	168
180°	1776	1776	1776	1776	1776	



TEST NUMBER: P1427545

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6
2.5°	1426.9	1425.1	1423.4	1419.1	1414.1	1414.4	1420.3	1424.3	1423.0	1421.8	1423.0
5°	1426.3	1424.7	1423.2	1418.7	1413.4	1414.9	1423.5	1429.7	1429.1	1428.5	1429.1
7.5°	1425.5	1424.4	1423.3	1420.2	1416.4	1418.0	1425.0	1429.9	1428.3	1426.7	1428.3
10°	1427.7	1427.4	1427.1	1422.3	1416.0	1416.4	1423.7	1428.8	1427.2	1425.6	1427.2
12.5°	1428.9	1430.8	1432.8	1425.9	1416.0	1414.0	1419.7	1423.3	1420.5	1417.6	1420.5
15°	1425.6	1431.0	1436.3	1426.6	1411.7	1404.8	1405.7	1405.4	1401.3	1397.2	1401.3
17.5°	1409.7	1417.3	1424.9	1411.9	1392.1	1380.5	1377.0	1373.0	1367.2	1361.4	1367.2
20°	1388.7	1397.5	1406.3	1392.2	1370.4	1356.5	1350.5	1344.8	1339.7	1334.6	1339.7
22.5°	1359.1	1367.2	1375.3	1361.7	1340.9	1326.8	1319.2	1312.6	1308.6	1304.5	1308.6
25°	1306.2	1311.6	1317.0	1303.1	1282.9	1270.0	1264.3	1259.5	1257.3	1255.0	1257.3
27.5°	1231.3	1232.8	1234.3	1223.4	1208.2	1197.1	1190.0	1184.0	1181.1	1178.3	1181.1
30°	1173.3	1173.3	1173.3	1164.8	1153.4	1143.9	1136.4	1129.3	1124.0	1118.6	1124.0
32.5°	1105.7	1104.9	1104.1	1097.9	1089.8	1081.6	1073.3	1065.7	1060.3	1054.9	1060.3
35°	985.0	988.5	991.9	987.6	980.6	973.1	964.9	957.5	952.8	948.0	952.8
37.5°	854.4	855.7	857.0	853.4	848.2	841.1	832.3	824.7	820.7	816.7	820.7
40°	755.4	755.8	756.1	751.7	745.7	739.5	733.2	726.9	720.9	714.9	720.9
42.5°	640.0	646.4	652.8	650.1	644.3	636.4	626.3	618.1	615.6	613.2	615.6
45°	415.7	443.9	472.0	482.3	486.7	483.3	471.9	455.2	422.7	390.2	422.7
47.5°	208.9	243.9	278.9	303.2	323.8	318.0	285.5	252.6	218.2	183.8	218.2
50°	118.0	138.8	159.7	192.1	228.4	222.4	174.1	134.9	123.3	111.6	123.3
52.5°	78.7	88.0	97.2	123.3	155.1	153.0	117.1	88.5	81.8	75.2	81.8
55°	39.8	42.3	44.9	56.4	70.9	70.6	55.4	43.6	41.7	39.8	41.7
57.5°	13.5	16.9	20.3	25.4	31.1	31.3	25.9	21.1	18.0	14.9	18.0
60°	2.1	5.3	8.4	12.6	17.0	16.5	11.1	6.4	3.6	0.7	3.6
62.5°	0.4	1.3	2.2	5.5	9.7	9.6	5.3	1.8	1.0	0.1	1.0
65°	0.0	0.0	0.0	0.2	0.6	0.6	0.2	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	1.1	2.5	4.3	5.7	6.8	7.2	7.2	7.5	7.9	7.9	7.9
90°	5.4	12.6	21.5	28.7	34.1	35.9	35.9	37.7	39.5	39.5	39.5
92.5°	19.7	31.2	31.6	31.6	38.4	41.6	44.5	44.8	46.6	46.6	46.6
95°	55.6	61.0	91.5	89.7	61.0	48.4	41.3	41.3	41.3	41.3	41.3
97.5°	106.2	114.1	119.1	159.6	168.6	162.9	132.7	111.6	99.7	94.4	99.7
100°	150.7	154.3	165.0	166.8	211.7	254.7	233.2	206.3	197.3	191.9	197.3
102.5°	195.2	197.3	213.8	221.4	231.8	256.2	330.8	322.5	316.4	315.3	316.4
105°	261.9	263.7	294.2	308.5	315.7	315.7	313.9	349.8	407.2	419.7	407.2
107.5°	333.3	341.5	377.4	415.8	424.0	426.2	416.9	411.5	409.3	410.8	409.3
110°	382.1	394.6	437.7	486.1	498.7	502.3	498.7	493.3	489.7	489.7	489.7



TEST NUMBER: P1427545

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	429.4	447.7	496.5	552.1	573.3	584.1	576.2	572.2	568.6	571.5	568.6
115°	502.3	529.2	593.7	651.1	694.2	699.6	697.8	697.8	696.0	696.0	696.0
117.5°	569.7	612.8	685.2	752.0	801.8	816.2	823.3	821.2	819.0	822.6	819.0
120°	617.1	667.3	749.8	825.1	873.6	895.1	902.3	898.7	902.3	898.7	902.3
122.5°	667.3	729.0	810.1	888.3	945.3	969.7	978.3	979.0	979.8	977.6	979.8
125°	742.6	818.0	913.0	993.8	1052.9	1081.6	1088.8	1090.6	1094.2	1103.2	1094.2
127.5°	818.7	904.1	1008.5	1086.3	1146.9	1181.7	1192.9	1196.8	1204.3	1208.3	1204.3
130°	871.8	968.6	1074.5	1148.0	1207.2	1244.9	1264.6	1270.0	1279.0	1277.2	1279.0
132.5°	927.7	1028.9	1136.2	1212.6	1267.5	1308.0	1324.9	1340.3	1343.5	1346.1	1343.5
135°	1009.9	1119.3	1226.9	1302.3	1354.3	1393.8	1415.3	1429.6	1438.6	1444.0	1438.6
137.5°	1096.4	1211.9	1315.2	1382.3	1434.7	1468.7	1493.1	1508.2	1517.5	1521.8	1517.5
140°	1155.2	1266.4	1366.9	1436.8	1483.5	1517.5	1539.1	1557.0	1567.8	1567.8	1567.8
142.5°	1211.2	1320.9	1418.5	1488.5	1529.4	1560.6	1583.5	1597.2	1609.4	1609.4	1609.4
145°	1289.7	1399.1	1488.8	1558.8	1592.9	1621.6	1646.7	1657.5	1664.6	1664.6	1664.6
147.5°	1371.9	1468.7	1550.5	1617.6	1646.3	1680.1	1699.8	1708.4	1717.4	1713.4	1717.4
150°	1420.7	1510.4	1589.3	1652.1	1680.8	1713.1	1732.8	1740.0	1748.9	1743.6	1748.9
152.5°	1468.0	1553.4	1625.2	1683.6	1708.0	1740.3	1762.9	1770.1	1776.2	1772.3	1776.2
155°	1531.9	1607.2	1673.6	1727.4	1748.9	1779.4	1801.0	1809.9	1817.1	1808.1	1817.1
157.5°	1588.9	1653.9	1711.6	1761.1	1784.1	1810.3	1830.4	1841.5	1848.7	1844.7	1848.7
160°	1623.4	1682.6	1734.6	1781.2	1802.7	1826.1	1847.6	1860.1	1867.3	1861.9	1867.3
162.5°	1652.1	1705.5	1754.7	1797.0	1815.7	1836.1	1861.9	1873.1	1880.2	1873.4	1880.2
165°	1693.3	1736.4	1779.4	1815.3	1831.4	1847.6	1874.5	1887.1	1892.4	1885.3	1892.4
167.5°	1724.5	1757.5	1792.3	1823.2	1835.0	1850.8	1877.7	1888.1	1894.9	1886.0	1894.9
170°	1741.8	1770.5	1801.0	1826.1	1835.0	1849.4	1876.3	1885.3	1890.6	1881.7	1890.6
172.5°	1756.1	1777.6	1802.4	1824.6	1829.3	1840.8	1866.2	1875.2	1879.2	1871.6	1879.2
175°	1770.5	1783.0	1801.0	1815.3	1813.5	1820.7	1842.2	1849.4	1856.6	1845.8	1856.6
177.5°	1777.3	1783.0	1788.8	1797.4	1791.6	1791.6	1807.4	1811.7	1813.2	1807.4	1813.2
180°	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1427545

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6
2.5°	1424.3	1420.3	1414.4	1414.1	1419.1	1423.4	1425.1	1426.9	1425.1	1423.4	1419.1
5°	1429.7	1423.5	1414.9	1413.4	1418.7	1423.2	1424.7	1426.3	1424.7	1423.2	1418.7
7.5°	1429.9	1425.0	1418.0	1416.4	1420.2	1423.3	1424.4	1425.5	1424.4	1423.3	1420.2
10°	1428.8	1423.7	1416.4	1416.0	1422.3	1427.1	1427.4	1427.7	1427.4	1427.1	1422.3
12.5°	1423.3	1419.7	1414.0	1416.0	1425.9	1432.8	1430.8	1428.9	1430.8	1432.8	1425.9
15°	1405.4	1405.7	1404.8	1411.7	1426.6	1436.3	1431.0	1425.6	1431.0	1436.3	1426.6
17.5°	1373.0	1377.0	1380.5	1392.1	1411.9	1424.9	1417.3	1409.7	1417.3	1424.9	1411.9
20°	1344.8	1350.5	1356.5	1370.4	1392.2	1406.3	1397.5	1388.7	1397.5	1406.3	1392.2
22.5°	1312.6	1319.2	1326.8	1340.9	1361.7	1375.3	1367.2	1359.1	1367.2	1375.3	1361.7
25°	1259.5	1264.3	1270.0	1282.9	1303.1	1317.0	1311.6	1306.2	1311.6	1317.0	1303.1
27.5°	1184.0	1190.0	1197.1	1208.2	1223.4	1234.3	1232.8	1231.3	1232.8	1234.3	1223.4
30°	1129.3	1136.4	1143.9	1153.4	1164.8	1173.3	1173.3	1173.3	1173.3	1173.3	1164.8
32.5°	1065.7	1073.3	1081.6	1089.8	1097.9	1104.1	1104.9	1105.7	1104.9	1104.1	1097.9
35°	957.5	964.9	973.1	980.6	987.6	991.9	988.5	985.0	988.5	991.9	987.6
37.5°	824.7	832.3	841.1	848.2	853.4	857.0	855.7	854.4	855.7	857.0	853.4
40°	726.9	733.2	739.5	745.7	751.7	756.1	755.8	755.4	755.8	756.1	751.7
42.5°	618.1	626.3	636.4	644.3	650.1	652.8	646.4	640.0	646.4	652.8	650.1
45°	455.2	471.9	483.3	486.7	482.3	472.0	443.9	415.7	443.9	472.0	482.3
47.5°	252.6	285.5	318.0	323.8	303.2	278.9	243.9	208.9	243.9	278.9	303.2
50°	134.9	174.1	222.4	228.4	192.1	159.7	138.8	118.0	138.8	159.7	192.1
52.5°	88.5	117.1	153.0	155.1	123.3	97.2	88.0	78.7	88.0	97.2	123.3
55°	43.6	55.4	70.6	70.9	56.4	44.9	42.3	39.8	42.3	44.9	56.4
57.5°	21.1	25.9	31.3	31.1	25.4	20.3	16.9	13.5	16.9	20.3	25.4
60°	6.4	11.1	16.5	17.0	12.6	8.4	5.3	2.1	5.3	8.4	12.6
62.5°	1.8	5.3	9.6	9.7	5.5	2.2	1.3	0.4	1.3	2.2	5.5
65°	0.0	0.2	0.6	0.6	0.2	0.0	0.0	0.0	0.0	0.0	0.2
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	7.5	7.2	7.2	6.8	5.7	4.3	2.5	1.1	2.5	3.9	6.5
90°	37.7	35.9	35.9	34.1	28.7	21.5	12.6	5.4	12.6	19.7	32.3
92.5°	44.8	44.5	41.6	38.4	31.6	31.6	31.2	19.7	34.1	48.4	69.6
95°	41.3	41.3	48.4	61.0	89.7	91.5	61.0	55.6	78.9	111.2	139.9
97.5°	111.6	132.7	162.9	168.6	159.6	119.1	114.1	106.2	144.6	176.5	222.8
100°	206.3	233.2	254.7	211.7	166.8	165.0	154.3	150.7	191.9	222.4	267.3
102.5°	322.5	330.8	256.2	231.8	221.4	213.8	197.3	195.2	236.4	278.4	316.1
105°	349.8	313.9	315.7	315.7	308.5	294.2	263.7	261.9	308.5	357.0	403.6
107.5°	411.5	416.9	426.2	424.0	415.8	377.4	341.5	333.3	375.3	433.4	484.7
110°	493.3	498.7	502.3	498.7	486.1	437.7	394.6	382.1	419.7	480.7	536.3



TEST NUMBER: P1427545

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	572.2	576.2	584.1	573.3	552.1	496.5	447.7	429.4	467.1	529.5	586.6
115°	697.8	697.8	699.6	694.2	651.1	593.7	529.2	502.3	534.5	591.9	654.7
117.5°	821.2	823.3	816.2	801.8	752.0	685.2	612.8	569.7	595.2	655.8	720.4
120°	898.7	902.3	895.1	873.6	825.1	749.8	667.3	617.1	636.8	696.0	760.6
122.5°	979.0	978.3	969.7	945.3	888.3	810.1	729.0	667.3	675.5	730.4	793.6
125°	1090.6	1088.8	1081.6	1052.9	993.8	913.0	818.0	742.6	731.9	778.5	843.1
127.5°	1196.8	1192.9	1181.7	1146.9	1086.3	1008.5	904.1	818.7	794.6	824.1	883.3
130°	1270.0	1264.6	1244.9	1207.2	1148.0	1074.5	968.6	871.8	837.7	855.6	907.7
132.5°	1340.3	1324.9	1308.0	1267.5	1212.6	1136.2	1028.9	927.7	880.7	888.6	929.2
135°	1429.6	1415.3	1393.8	1354.3	1302.3	1226.9	1119.3	1009.9	945.3	938.1	961.5
137.5°	1508.2	1493.1	1468.7	1434.7	1382.3	1315.2	1211.9	1096.4	1014.9	990.9	999.9
140°	1557.0	1539.1	1517.5	1483.5	1436.8	1366.9	1266.4	1155.2	1063.7	1029.6	1024.2
142.5°	1597.2	1583.5	1560.6	1529.4	1488.5	1418.5	1320.9	1211.2	1113.9	1069.8	1057.3
145°	1657.5	1646.7	1621.6	1592.9	1558.8	1488.8	1399.1	1289.7	1192.9	1135.5	1108.6
147.5°	1708.4	1699.8	1680.1	1646.3	1617.6	1550.5	1468.7	1371.9	1272.5	1201.5	1166.7
150°	1740.0	1732.8	1713.1	1680.8	1652.1	1589.3	1510.4	1420.7	1325.6	1250.3	1205.4
152.5°	1770.1	1762.9	1740.3	1708.0	1683.6	1625.2	1553.4	1468.0	1371.5	1296.2	1249.9
155°	1809.9	1801.0	1779.4	1748.9	1727.4	1673.6	1607.2	1531.9	1449.4	1370.4	1318.4
157.5°	1841.5	1830.4	1810.3	1784.1	1761.1	1711.6	1653.9	1588.9	1516.8	1441.5	1388.4
160°	1860.1	1847.6	1826.1	1802.7	1781.2	1734.6	1682.6	1623.4	1557.0	1488.8	1431.4
162.5°	1873.1	1861.9	1836.1	1815.7	1797.0	1754.7	1705.5	1652.1	1592.9	1533.3	1480.2
165°	1887.1	1874.5	1847.6	1831.4	1815.3	1779.4	1736.4	1693.3	1643.1	1594.7	1551.6
167.5°	1888.1	1877.7	1850.8	1835.0	1823.2	1792.3	1757.5	1724.5	1685.4	1647.4	1611.5
170°	1885.3	1876.3	1849.4	1835.0	1826.1	1801.0	1770.5	1741.8	1711.3	1679.0	1650.3
172.5°	1875.2	1866.2	1840.8	1829.3	1824.6	1802.4	1777.6	1756.1	1729.9	1706.2	1683.3
175°	1849.4	1842.2	1820.7	1813.5	1815.3	1801.0	1783.0	1770.5	1754.3	1740.0	1727.4
177.5°	1811.7	1807.4	1791.6	1791.6	1797.4	1788.8	1783.0	1777.3	1770.1	1765.8	1761.5
180°	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1427545

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6	1420.6
2.5°	1414.1	1414.4	1420.3	1424.3	1423.0	1421.8	1423.0	1424.3	1420.3	1414.4	1414.1
5°	1413.4	1414.9	1423.5	1429.7	1429.1	1428.5	1429.1	1429.7	1423.5	1414.9	1413.4
7.5°	1416.4	1418.0	1425.0	1429.9	1428.3	1426.7	1428.3	1429.9	1425.0	1418.0	1416.4
10°	1416.0	1416.4	1423.7	1428.8	1427.2	1425.6	1427.2	1428.8	1423.7	1416.4	1416.0
12.5°	1416.0	1414.0	1419.7	1423.3	1420.5	1417.6	1420.5	1423.3	1419.7	1414.0	1416.0
15°	1411.7	1404.8	1405.7	1405.4	1401.3	1397.2	1401.3	1405.4	1405.7	1404.8	1411.7
17.5°	1392.1	1380.5	1377.0	1373.0	1367.2	1361.4	1367.2	1373.0	1377.0	1380.5	1392.1
20°	1370.4	1356.5	1350.5	1344.8	1339.7	1334.6	1339.7	1344.8	1350.5	1356.5	1370.4
22.5°	1340.9	1326.8	1319.2	1312.6	1308.6	1304.5	1308.6	1312.6	1319.2	1326.8	1340.9
25°	1282.9	1270.0	1264.3	1259.5	1257.3	1255.0	1257.3	1259.5	1264.3	1270.0	1282.9
27.5°	1208.2	1197.1	1190.0	1184.0	1181.1	1178.3	1181.1	1184.0	1190.0	1197.1	1208.2
30°	1153.4	1143.9	1136.4	1129.3	1124.0	1118.6	1124.0	1129.3	1136.4	1143.9	1153.4
32.5°	1089.8	1081.6	1073.3	1065.7	1060.3	1054.9	1060.3	1065.7	1073.3	1081.6	1089.8
35°	980.6	973.1	964.9	957.5	952.8	948.0	952.8	957.5	964.9	973.1	980.6
37.5°	848.2	841.1	832.3	824.7	820.7	816.7	820.7	824.7	832.3	841.1	848.2
40°	745.7	739.5	733.2	726.9	720.9	714.9	720.9	726.9	733.2	739.5	745.7
42.5°	644.3	636.4	626.3	618.1	615.6	613.2	615.6	618.1	626.3	636.4	644.3
45°	486.7	483.3	471.9	455.2	422.7	390.2	422.7	455.2	471.9	483.3	486.7
47.5°	323.8	318.0	285.5	252.6	218.2	183.8	218.2	252.6	285.5	318.0	323.8
50°	228.4	222.4	174.1	134.9	123.3	111.6	123.3	134.9	174.1	222.4	228.4
52.5°	155.1	153.0	117.1	88.5	81.8	75.2	81.8	88.5	117.1	153.0	155.1
55°	70.9	70.6	55.4	43.6	41.7	39.8	41.7	43.6	55.4	70.6	70.9
57.5°	31.1	31.3	25.9	21.1	18.0	14.9	18.0	21.1	25.9	31.3	31.1
60°	17.0	16.5	11.1	6.4	3.6	0.7	3.6	6.4	11.1	16.5	17.0
62.5°	9.7	9.6	5.3	1.8	1.0	0.1	1.0	1.8	5.3	9.6	9.7
65°	0.6	0.6	0.2	0.0	0.0	0.0	0.0	0.0	0.2	0.6	0.6
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	8.3	10.8	13.3	14.7	16.1	15.4	16.1	14.7	13.3	10.8	8.3
90°	41.3	53.8	66.4	73.5	80.7	77.1	80.7	73.5	66.4	53.8	41.3
92.5°	82.9	104.0	119.5	132.4	138.1	137.4	138.1	132.4	119.5	104.0	82.9
95°	166.8	191.9	217.0	235.0	245.7	242.2	245.7	235.0	217.0	191.9	166.8
97.5°	257.2	291.0	318.9	335.8	346.6	353.7	346.6	335.8	318.9	291.0	257.2
100°	317.5	349.8	382.1	401.8	419.7	426.9	419.7	401.8	382.1	349.8	317.5
102.5°	366.3	408.6	443.8	464.9	480.0	487.2	480.0	464.9	443.8	408.6	366.3
105°	446.7	491.5	529.2	556.1	572.2	577.6	572.2	556.1	529.2	491.5	446.7
107.5°	527.0	573.3	608.1	637.9	657.6	669.1	657.6	637.9	608.1	573.3	527.0
110°	590.2	627.8	665.5	692.4	712.1	719.3	712.1	692.4	665.5	627.8	590.2

TEST NUMBER: P1427545

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	643.2	685.2	722.9	749.8	772.4	782.4	772.4	749.8	722.9	685.2	643.2
115°	717.5	773.1	807.2	832.3	848.5	857.4	848.5	832.3	807.2	773.1	717.5
117.5°	779.2	837.3	874.6	894.0	901.6	908.0	901.6	894.0	874.6	837.3	779.2
120°	818.0	871.8	914.8	939.9	948.9	952.5	948.9	939.9	914.8	871.8	818.0
122.5°	853.8	904.8	946.4	977.3	992.0	995.5	992.0	977.3	946.4	904.8	853.8
125°	904.1	952.5	995.5	1026.0	1042.2	1051.2	1042.2	1026.0	995.5	952.5	904.1
127.5°	947.8	1000.2	1039.7	1067.3	1083.1	1090.3	1083.1	1067.3	1039.7	1000.2	947.8
130°	972.2	1026.0	1065.5	1096.0	1110.3	1117.5	1110.3	1096.0	1065.5	1026.0	972.2
132.5°	990.9	1047.6	1088.5	1116.1	1131.9	1139.0	1131.9	1116.1	1088.5	1047.6	990.9
135°	1013.5	1072.7	1115.7	1142.6	1157.0	1164.2	1157.0	1142.6	1115.7	1072.7	1013.5
137.5°	1033.2	1087.0	1131.9	1160.2	1173.1	1177.8	1173.1	1160.2	1131.9	1087.0	1033.2
140°	1047.6	1094.2	1139.0	1166.0	1180.3	1182.1	1180.3	1166.0	1139.0	1094.2	1047.6
142.5°	1066.2	1102.8	1141.9	1168.8	1183.2	1186.4	1183.2	1168.8	1141.9	1102.8	1066.2
145°	1099.6	1121.1	1148.0	1173.1	1185.7	1189.3	1185.7	1173.1	1148.0	1121.1	1099.6
147.5°	1141.6	1148.4	1162.4	1178.9	1191.1	1193.6	1191.1	1178.9	1162.4	1148.4	1141.6
150°	1173.1	1171.3	1176.7	1187.5	1198.2	1196.5	1198.2	1187.5	1176.7	1171.3	1173.1
152.5°	1209.0	1198.6	1198.2	1203.3	1208.3	1207.9	1208.3	1203.3	1198.2	1198.6	1209.0
155°	1270.0	1250.3	1239.5	1235.9	1235.9	1234.1	1235.9	1235.9	1239.5	1250.3	1270.0
157.5°	1337.1	1309.5	1293.3	1284.7	1282.2	1278.2	1282.2	1284.7	1293.3	1309.5	1337.1
160°	1383.0	1352.5	1336.4	1322.0	1316.6	1311.3	1316.6	1322.0	1336.4	1352.5	1383.0
162.5°	1426.1	1397.0	1379.4	1366.5	1361.1	1352.9	1361.1	1366.5	1379.4	1397.0	1426.1
165°	1496.0	1465.5	1445.8	1435.0	1427.8	1420.7	1427.8	1435.0	1445.8	1465.5	1496.0
167.5°	1566.0	1532.6	1519.7	1507.5	1500.7	1487.8	1500.7	1507.5	1519.7	1532.6	1566.0
170°	1609.0	1578.5	1571.4	1560.6	1548.0	1533.7	1548.0	1560.6	1571.4	1578.5	1609.0
172.5°	1646.3	1625.9	1618.7	1607.9	1604.0	1592.5	1604.0	1607.9	1618.7	1625.9	1646.3
175°	1700.5	1684.4	1684.4	1682.6	1677.2	1666.4	1677.2	1682.6	1684.4	1684.4	1700.5
177.5°	1745.7	1737.1	1742.8	1742.8	1741.4	1731.4	1741.4	1742.8	1742.8	1737.1	1745.7
180°	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1427545

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1420.6	1420.6	1420.6	1420.6
2.5°	1419.1	1423.4	1425.1	1426.9
5°	1418.7	1423.2	1424.7	1426.3
7.5°	1420.2	1423.3	1424.4	1425.5
10°	1422.3	1427.1	1427.4	1427.7
12.5°	1425.9	1432.8	1430.8	1428.9
15°	1426.6	1436.3	1431.0	1425.6
17.5°	1411.9	1424.9	1417.3	1409.7
20°	1392.2	1406.3	1397.5	1388.7
22.5°	1361.7	1375.3	1367.2	1359.1
25°	1303.1	1317.0	1311.6	1306.2
27.5°	1223.4	1234.3	1232.8	1231.3
30°	1164.8	1173.3	1173.3	1173.3
32.5°	1097.9	1104.1	1104.9	1105.7
35°	987.6	991.9	988.5	985.0
37.5°	853.4	857.0	855.7	854.4
40°	751.7	756.1	755.8	755.4
42.5°	650.1	652.8	646.4	640.0
45°	482.3	472.0	443.9	415.7
47.5°	303.2	278.9	243.9	208.9
50°	192.1	159.7	138.8	118.0
52.5°	123.3	97.2	88.0	78.7
55°	56.4	44.9	42.3	39.8
57.5°	25.4	20.3	16.9	13.5
60°	12.6	8.4	5.3	2.1
62.5°	5.5	2.2	1.3	0.4
65°	0.2	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0
87.5°	6.5	3.9	2.5	1.1
90°	32.3	19.7	12.6	5.4
92.5°	69.6	48.4	34.1	19.7
95°	139.9	111.2	78.9	55.6
97.5°	222.8	176.5	144.6	106.2
100°	267.3	222.4	191.9	150.7
102.5°	316.1	278.4	236.4	195.2
105°	403.6	357.0	308.5	261.9
107.5°	484.7	433.4	375.3	333.3
110°	536.3	480.7	419.7	382.1



TEST NUMBER: P1427545

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	586.6	529.5	467.1	429.4
115°	654.7	591.9	534.5	502.3
117.5°	720.4	655.8	595.2	569.7
120°	760.6	696.0	636.8	617.1
122.5°	793.6	730.4	675.5	667.3
125°	843.1	778.5	731.9	742.6
127.5°	883.3	824.1	794.6	818.7
130°	907.7	855.6	837.7	871.8
132.5°	929.2	888.6	880.7	927.7
135°	961.5	938.1	945.3	1009.9
137.5°	999.9	990.9	1014.9	1096.4
140°	1024.2	1029.6	1063.7	1155.2
142.5°	1057.3	1069.8	1113.9	1211.2
145°	1108.6	1135.5	1192.9	1289.7
147.5°	1166.7	1201.5	1272.5	1371.9
150°	1205.4	1250.3	1325.6	1420.7
152.5°	1249.9	1296.2	1371.5	1468.0
155°	1318.4	1370.4	1449.4	1531.9
157.5°	1388.4	1441.5	1516.8	1588.9
160°	1431.4	1488.8	1557.0	1623.4
162.5°	1480.2	1533.3	1592.9	1652.1
165°	1551.6	1594.7	1643.1	1693.3
167.5°	1611.5	1647.4	1685.4	1724.5
170°	1650.3	1679.0	1711.3	1741.8
172.5°	1683.3	1706.2	1729.9	1756.1
175°	1727.4	1740.0	1754.3	1770.5
177.5°	1761.5	1765.8	1770.1	1777.3
180°	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1427545
 CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L940-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00