

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427554

Luminaire Tested: SQ2W-BBM-K-125U-125D-L940-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2024
Report Number: P1427554
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G3-2104-222-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-BBM-K-125U-125D-L940-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - BLACK DISCREET BAFFLE, MEDIUM 80-DEGREE OPTIC
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1250 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10477.7 lumens
Efficiency: N/A
Efficacy: 111.7 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.17 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 93.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427554

CATALOG NUMBER: SQ2W-BBM-K-125U-125D-L940-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

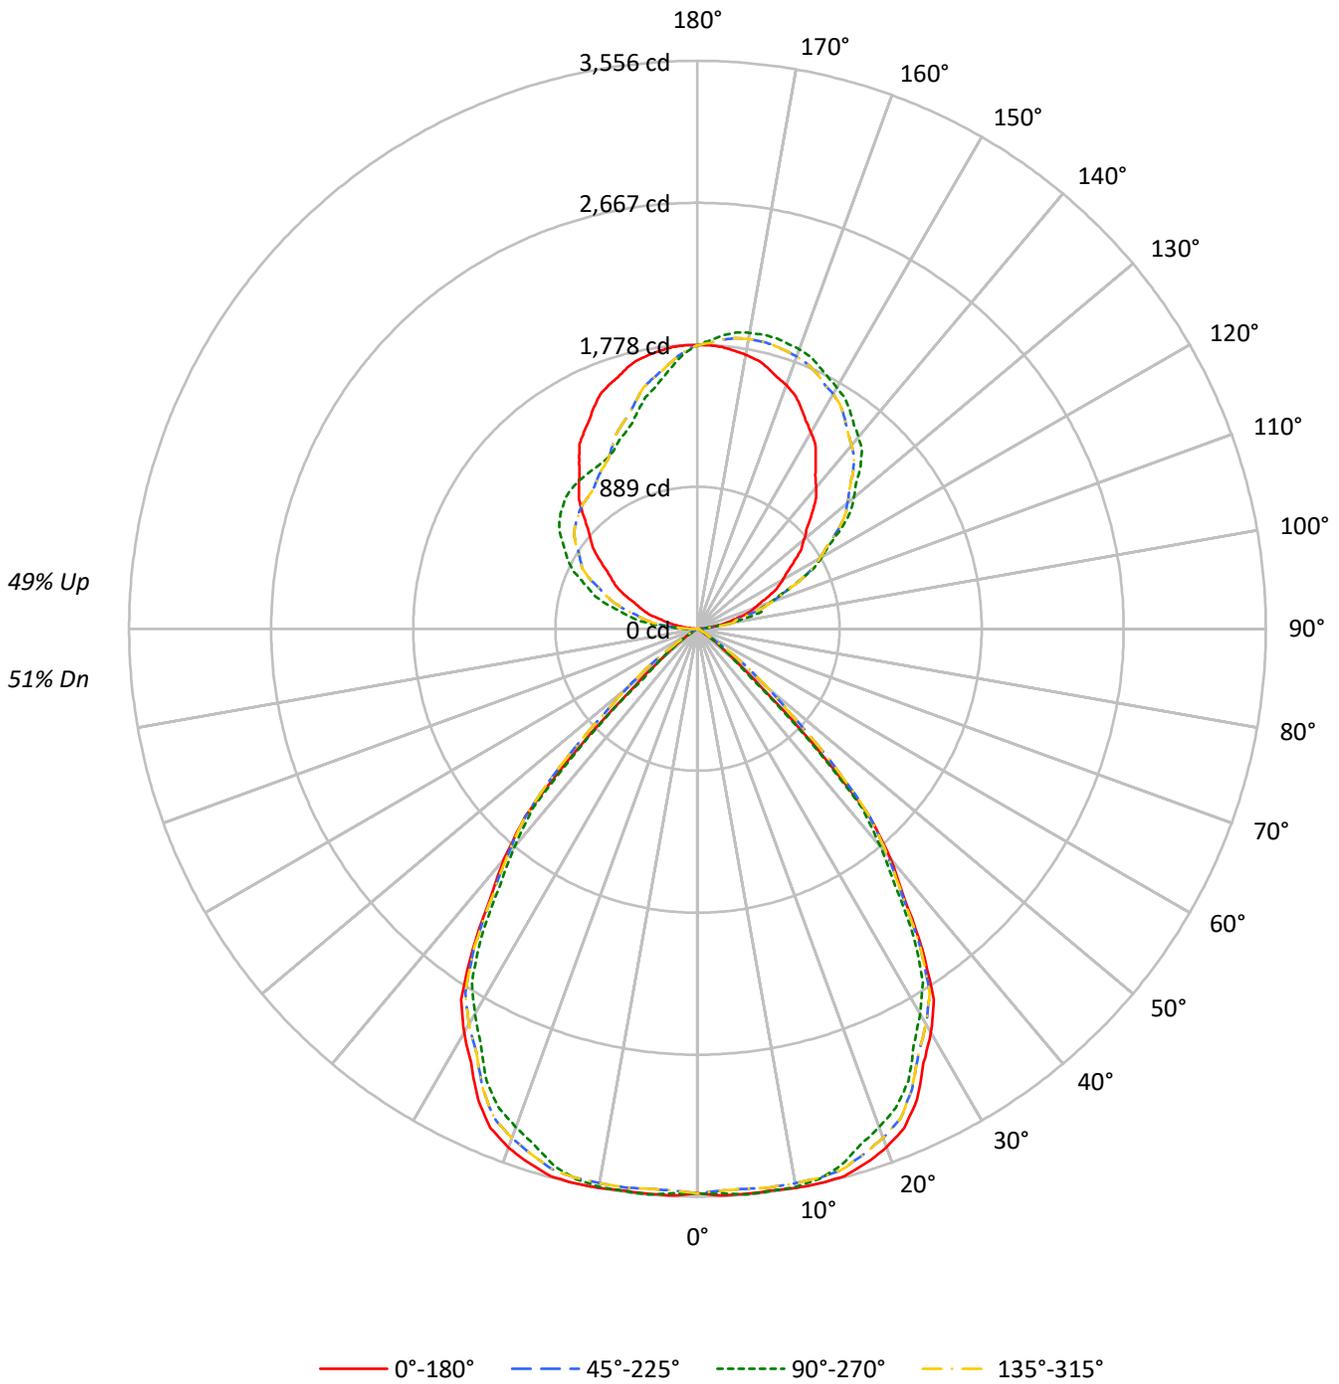



TEST NUMBER: P1427554

CATALOG NUMBER: SQ2W-BBM-K-125U-125D-L940-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51				
1	100	96	93	90	92	89	87	84	76	74	73	64	63	62	53	52	52	46				
2	93	87	82	77	86	81	76	73	69	66	64	59	57	55	49	48	47	42				
3	86	78	72	67	80	73	68	63	63	59	56	54	51	49	46	44	42	39				
4	80	71	64	59	74	66	60	56	58	53	50	50	47	44	42	40	38	35				
5	74	64	57	52	69	60	54	49	53	48	44	46	42	40	39	37	35	32				
6	69	58	51	46	64	55	49	44	48	44	40	42	39	36	36	34	32	29				
7	64	53	46	41	60	50	44	40	44	40	36	39	35	33	34	31	29	27				
8	60	49	42	37	56	46	40	36	41	36	33	36	32	30	32	29	27	25				
9	56	45	38	34	52	43	37	33	38	33	30	34	30	27	29	27	25	23				
10	53	42	35	31	49	40	34	30	35	31	27	31	28	25	28	25	23	21				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	57087	57087	57087	57087
5°	57536	57622	57536	57622
10°	58258	58171	58258	58171
15°	59309	58127	59309	58127
20°	59384	57074	59384	57074
25°	57917	55648	57917	55648
30°	54444	51905	54444	51905
35°	48321	46508	48321	46508
40°	39628	37504	39628	37504
45°	23626	22173	23626	22173
50°	7375	6975	7375	6975
55°	2790	2790	2790	2790
60°	171	58	171	58
65°	0	0	0	0
70°	0	0	0	0
75°	0	0	0	0
80°	0	0	0	0
85°	0	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 27660 cd/sqm



TEST NUMBER: P1427554

CATALOG NUMBER: SQ2W-BBM-K-125U-125D-L940-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	338.1	3.2
10°-20°	990.3	9.5
20°-30°	1456.9	13.9
30°-40°	1489.1	14.2
40°-50°	857.8	8.2
50°-60°	147.6	1.4
60°-70°	5.3	0.1
70°-80°	0.0	0.0
80°-90°	9.4	0.1
90°-100°	141.3	1.3
100°-110°	412.2	3.9
110°-120°	672.6	6.4
120°-130°	853.5	8.1
130°-140°	913.3	8.7
140°-150°	852.8	8.1
150°-160°	701.7	6.7
160°-170°	470.6	4.5
170°-180°	167.1	1.6
0°-30°	2785.3	26.6
0°-40°	4274.4	40.8
0°-60°	5279.9	50.4
0°-90°	5294.6	50.5
90°-120°	1226.1	11.7
90°-150°	3845.7	36.7
90°-180°	5185.0	49.5
0°-180°	10477.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	3536	3536	3536	3536	3536	
5°	3550	3555	3550	3555	3550	339
15°	3548	3478	3548	3478	3548	999
25°	3251	3124	3251	3124	3251	1483
35°	2452	2360	2452	2360	2452	1514
45°	1035	971	1035	971	1035	801
55°	99	99	99	99	99	105
65°	0	0	0	0	0	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	5	40	5	77	5	4
95°	56	41	56	242	56	67
105°	262	420	262	578	262	279
115°	502	696	502	857	502	495
125°	743	1103	743	1051	743	664
135°	1010	1444	1010	1164	1010	780
145°	1290	1665	1290	1189	1290	807
155°	1532	1808	1532	1234	1532	704
165°	1693	1885	1693	1421	1693	477
175°	1770	1846	1770	1666	1770	168
180°	1776	1776	1776	1776	1776	



TEST NUMBER: P1427554

CATALOG NUMBER: SQ2W-BBM-K-125U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8
2.5°	3551.4	3547.0	3542.6	3532.1	3519.5	3520.4	3534.9	3545.0	3541.8	3538.7	3541.8
5°	3550.0	3546.1	3542.1	3531.1	3517.8	3521.7	3542.9	3558.4	3556.9	3555.3	3556.9
7.5°	3547.9	3545.2	3542.5	3534.8	3525.3	3529.4	3546.8	3558.9	3555.0	3551.0	3555.0
10°	3553.5	3552.7	3552.0	3540.0	3524.2	3525.4	3543.5	3556.1	3552.1	3548.2	3552.1
12.5°	3556.4	3561.2	3566.1	3548.9	3524.4	3519.3	3533.6	3542.6	3535.5	3528.4	3535.5
15°	3548.2	3561.6	3574.9	3550.6	3513.6	3496.3	3498.7	3497.9	3487.7	3477.5	3487.7
17.5°	3508.6	3527.5	3546.3	3514.1	3464.9	3436.0	3427.4	3417.2	3402.8	3388.3	3402.8
20°	3456.2	3478.3	3500.3	3465.1	3410.8	3376.3	3361.3	3347.0	3334.4	3321.8	3334.4
22.5°	3382.7	3402.8	3422.9	3389.1	3337.4	3302.2	3283.5	3266.9	3256.9	3246.8	3256.9
25°	3251.1	3264.4	3277.8	3243.4	3193.1	3160.9	3146.7	3134.7	3129.2	3123.7	3129.2
27.5°	3064.6	3068.4	3072.2	3044.8	3007.1	2979.4	2961.8	2946.8	2939.8	2932.7	2939.8
30°	2920.3	2920.3	2920.3	2899.1	2870.8	2847.2	2828.3	2810.8	2797.5	2784.1	2797.5
32.5°	2751.9	2750.0	2748.1	2732.6	2712.4	2692.0	2671.2	2652.3	2639.0	2625.6	2639.0
35°	2451.6	2460.2	2468.9	2458.0	2440.8	2421.9	2401.4	2383.2	2371.4	2359.6	2371.4
37.5°	2126.5	2129.8	2133.1	2124.1	2111.0	2093.5	2071.5	2052.5	2042.6	2032.7	2042.6
40°	1880.2	1881.0	1881.8	1870.8	1855.9	1840.5	1824.8	1809.3	1794.4	1779.4	1794.4
42.5°	1593.0	1608.9	1624.7	1618.0	1603.7	1583.9	1558.8	1538.4	1532.3	1526.1	1532.3
45°	1034.7	1104.7	1174.7	1200.4	1211.4	1202.8	1174.5	1133.0	1052.0	971.1	1052.0
47.5°	520.0	607.1	694.2	754.6	806.0	791.4	710.7	628.8	543.1	457.4	543.1
50°	293.6	345.5	397.4	478.2	568.6	553.6	433.4	335.9	306.8	277.7	306.8
52.5°	196.0	218.9	241.9	306.9	386.0	380.8	291.4	220.2	203.6	187.1	203.6
55°	99.1	105.3	111.6	140.3	176.5	175.7	138.0	108.5	103.8	99.1	103.8
57.5°	33.6	42.1	50.6	63.3	77.5	77.9	64.5	52.6	44.8	37.1	44.8
60°	5.3	13.2	21.0	31.2	42.3	41.1	27.7	15.9	8.8	1.8	8.8
62.5°	1.1	3.3	5.5	13.8	24.2	23.9	13.1	4.4	2.4	0.4	2.4
65°	0.0	0.0	0.0	0.6	1.4	1.4	0.6	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	1.1	2.5	4.3	5.7	6.8	7.2	7.2	7.5	7.9	7.9	7.9
90°	5.4	12.6	21.5	28.7	34.1	35.9	35.9	37.7	39.5	39.5	39.5
92.5°	19.7	31.2	31.6	31.6	38.4	41.6	44.5	44.8	46.6	46.6	46.6
95°	55.6	61.0	91.5	89.7	61.0	48.4	41.3	41.3	41.3	41.3	41.3
97.5°	106.2	114.1	119.1	159.6	168.6	162.9	132.7	111.6	99.7	94.4	99.7
100°	150.7	154.3	165.0	166.8	211.7	254.7	233.2	206.3	197.3	191.9	197.3
102.5°	195.2	197.3	213.8	221.4	231.8	256.2	330.8	322.5	316.4	315.3	316.4
105°	261.9	263.7	294.2	308.5	315.7	315.7	313.9	349.8	407.2	419.7	407.2
107.5°	333.3	341.5	377.4	415.8	424.0	426.2	416.9	411.5	409.3	410.8	409.3
110°	382.1	394.6	437.7	486.1	498.7	502.3	498.7	493.3	489.7	489.7	489.7



TEST NUMBER: P1427554

CATALOG NUMBER: SQ2W-BBM-K-125U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	429.4	447.7	496.5	552.1	573.3	584.1	576.2	572.2	568.6	571.5	568.6
115°	502.3	529.2	593.7	651.1	694.2	699.6	697.8	697.8	696.0	696.0	696.0
117.5°	569.7	612.8	685.2	752.0	801.8	816.2	823.3	821.2	819.0	822.6	819.0
120°	617.1	667.3	749.8	825.1	873.6	895.1	902.3	898.7	902.3	898.7	902.3
122.5°	667.3	729.0	810.1	888.3	945.3	969.7	978.3	979.0	979.8	977.6	979.8
125°	742.6	818.0	913.0	993.8	1052.9	1081.6	1088.8	1090.6	1094.2	1103.2	1094.2
127.5°	818.7	904.1	1008.5	1086.3	1146.9	1181.7	1192.9	1196.8	1204.3	1208.3	1204.3
130°	871.8	968.6	1074.5	1148.0	1207.2	1244.9	1264.6	1270.0	1279.0	1277.2	1279.0
132.5°	927.7	1028.9	1136.2	1212.6	1267.5	1308.0	1324.9	1340.3	1343.5	1346.1	1343.5
135°	1009.9	1119.3	1226.9	1302.3	1354.3	1393.8	1415.3	1429.6	1438.6	1444.0	1438.6
137.5°	1096.4	1211.9	1315.2	1382.3	1434.7	1468.7	1493.1	1508.2	1517.5	1521.8	1517.5
140°	1155.2	1266.4	1366.9	1436.8	1483.5	1517.5	1539.1	1557.0	1567.8	1567.8	1567.8
142.5°	1211.2	1320.9	1418.5	1488.5	1529.4	1560.6	1583.5	1597.2	1609.4	1609.4	1609.4
145°	1289.7	1399.1	1488.8	1558.8	1592.9	1621.6	1646.7	1657.5	1664.6	1664.6	1664.6
147.5°	1371.9	1468.7	1550.5	1617.6	1646.3	1680.1	1699.8	1708.4	1717.4	1713.4	1717.4
150°	1420.7	1510.4	1589.3	1652.1	1680.8	1713.1	1732.8	1740.0	1748.9	1743.6	1748.9
152.5°	1468.0	1553.4	1625.2	1683.6	1708.0	1740.3	1762.9	1770.1	1776.2	1772.3	1776.2
155°	1531.9	1607.2	1673.6	1727.4	1748.9	1779.4	1801.0	1809.9	1817.1	1808.1	1817.1
157.5°	1588.9	1653.9	1711.6	1761.1	1784.1	1810.3	1830.4	1841.5	1848.7	1844.7	1848.7
160°	1623.4	1682.6	1734.6	1781.2	1802.7	1826.1	1847.6	1860.1	1867.3	1861.9	1867.3
162.5°	1652.1	1705.5	1754.7	1797.0	1815.7	1836.1	1861.9	1873.1	1880.2	1873.4	1880.2
165°	1693.3	1736.4	1779.4	1815.3	1831.4	1847.6	1874.5	1887.1	1892.4	1885.3	1892.4
167.5°	1724.5	1757.5	1792.3	1823.2	1835.0	1850.8	1877.7	1888.1	1894.9	1886.0	1894.9
170°	1741.8	1770.5	1801.0	1826.1	1835.0	1849.4	1876.3	1885.3	1890.6	1881.7	1890.6
172.5°	1756.1	1777.6	1802.4	1824.6	1829.3	1840.8	1866.2	1875.2	1879.2	1871.6	1879.2
175°	1770.5	1783.0	1801.0	1815.3	1813.5	1820.7	1842.2	1849.4	1856.6	1845.8	1856.6
177.5°	1777.3	1783.0	1788.8	1797.4	1791.6	1791.6	1807.4	1811.7	1813.2	1807.4	1813.2
180°	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1427554

CATALOG NUMBER: SQ2W-BBM-K-125U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8
2.5°	3545.0	3534.9	3520.4	3519.5	3532.1	3542.6	3547.0	3551.4	3547.0	3542.6	3532.1
5°	3558.4	3542.9	3521.7	3517.8	3531.1	3542.1	3546.1	3550.0	3546.1	3542.1	3531.1
7.5°	3558.9	3546.8	3529.4	3525.3	3534.8	3542.5	3545.2	3547.9	3545.2	3542.5	3534.8
10°	3556.1	3543.5	3525.4	3524.2	3540.0	3552.0	3552.7	3553.5	3552.7	3552.0	3540.0
12.5°	3542.6	3533.6	3519.3	3524.4	3548.9	3566.1	3561.2	3556.4	3561.2	3566.1	3548.9
15°	3497.9	3498.7	3496.3	3513.6	3550.6	3574.9	3561.6	3548.2	3561.6	3574.9	3550.6
17.5°	3417.2	3427.4	3436.0	3464.9	3514.1	3546.3	3527.5	3508.6	3527.5	3546.3	3514.1
20°	3347.0	3361.3	3376.3	3410.8	3465.1	3500.3	3478.3	3456.2	3478.3	3500.3	3465.1
22.5°	3266.9	3283.5	3302.2	3337.4	3389.1	3422.9	3402.8	3382.7	3402.8	3422.9	3389.1
25°	3134.7	3146.7	3160.9	3193.1	3243.4	3277.8	3264.4	3251.1	3264.4	3277.8	3243.4
27.5°	2946.8	2961.8	2979.4	3007.1	3044.8	3072.2	3068.4	3064.6	3068.4	3072.2	3044.8
30°	2810.8	2828.3	2847.2	2870.8	2899.1	2920.3	2920.3	2920.3	2920.3	2920.3	2899.1
32.5°	2652.3	2671.2	2692.0	2712.4	2732.6	2748.1	2750.0	2751.9	2750.0	2748.1	2732.6
35°	2383.2	2401.4	2421.9	2440.8	2458.0	2468.9	2460.2	2451.6	2460.2	2468.9	2458.0
37.5°	2052.5	2071.5	2093.5	2111.0	2124.1	2133.1	2129.8	2126.5	2129.8	2133.1	2124.1
40°	1809.3	1824.8	1840.5	1855.9	1870.8	1881.8	1881.0	1880.2	1881.0	1881.8	1870.8
42.5°	1538.4	1558.8	1583.9	1603.7	1618.0	1624.7	1608.9	1593.0	1608.9	1624.7	1618.0
45°	1133.0	1174.5	1202.8	1211.4	1200.4	1174.7	1104.7	1034.7	1104.7	1174.7	1200.4
47.5°	628.8	710.7	791.4	806.0	754.6	694.2	607.1	520.0	607.1	694.2	754.6
50°	335.9	433.4	553.6	568.6	478.2	397.4	345.5	293.6	345.5	397.4	478.2
52.5°	220.2	291.4	380.8	386.0	306.9	241.9	218.9	196.0	218.9	241.9	306.9
55°	108.5	138.0	175.7	176.5	140.3	111.6	105.3	99.1	105.3	111.6	140.3
57.5°	52.6	64.5	77.9	77.5	63.3	50.6	42.1	33.6	42.1	50.6	63.3
60°	15.9	27.7	41.1	42.3	31.2	21.0	13.2	5.3	13.2	21.0	31.2
62.5°	4.4	13.1	23.9	24.2	13.8	5.5	3.3	1.1	3.3	5.5	13.8
65°	0.0	0.6	1.4	1.4	0.6	0.0	0.0	0.0	0.0	0.0	0.6
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	7.5	7.2	7.2	6.8	5.7	4.3	2.5	1.1	2.5	3.9	6.5
90°	37.7	35.9	35.9	34.1	28.7	21.5	12.6	5.4	12.6	19.7	32.3
92.5°	44.8	44.5	41.6	38.4	31.6	31.6	31.2	19.7	34.1	48.4	69.6
95°	41.3	41.3	48.4	61.0	89.7	91.5	61.0	55.6	78.9	111.2	139.9
97.5°	111.6	132.7	162.9	168.6	159.6	119.1	114.1	106.2	144.6	176.5	222.8
100°	206.3	233.2	254.7	211.7	166.8	165.0	154.3	150.7	191.9	222.4	267.3
102.5°	322.5	330.8	256.2	231.8	221.4	213.8	197.3	195.2	236.4	278.4	316.1
105°	349.8	313.9	315.7	315.7	308.5	294.2	263.7	261.9	308.5	357.0	403.6
107.5°	411.5	416.9	426.2	424.0	415.8	377.4	341.5	333.3	375.3	433.4	484.7
110°	493.3	498.7	502.3	498.7	486.1	437.7	394.6	382.1	419.7	480.7	536.3



TEST NUMBER: P1427554

CATALOG NUMBER: SQ2W-BBM-K-125U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	572.2	576.2	584.1	573.3	552.1	496.5	447.7	429.4	467.1	529.5	586.6
115°	697.8	697.8	699.6	694.2	651.1	593.7	529.2	502.3	534.5	591.9	654.7
117.5°	821.2	823.3	816.2	801.8	752.0	685.2	612.8	569.7	595.2	655.8	720.4
120°	898.7	902.3	895.1	873.6	825.1	749.8	667.3	617.1	636.8	696.0	760.6
122.5°	979.0	978.3	969.7	945.3	888.3	810.1	729.0	667.3	675.5	730.4	793.6
125°	1090.6	1088.8	1081.6	1052.9	993.8	913.0	818.0	742.6	731.9	778.5	843.1
127.5°	1196.8	1192.9	1181.7	1146.9	1086.3	1008.5	904.1	818.7	794.6	824.1	883.3
130°	1270.0	1264.6	1244.9	1207.2	1148.0	1074.5	968.6	871.8	837.7	855.6	907.7
132.5°	1340.3	1324.9	1308.0	1267.5	1212.6	1136.2	1028.9	927.7	880.7	888.6	929.2
135°	1429.6	1415.3	1393.8	1354.3	1302.3	1226.9	1119.3	1009.9	945.3	938.1	961.5
137.5°	1508.2	1493.1	1468.7	1434.7	1382.3	1315.2	1211.9	1096.4	1014.9	990.9	999.9
140°	1557.0	1539.1	1517.5	1483.5	1436.8	1366.9	1266.4	1155.2	1063.7	1029.6	1024.2
142.5°	1597.2	1583.5	1560.6	1529.4	1488.5	1418.5	1320.9	1211.2	1113.9	1069.8	1057.3
145°	1657.5	1646.7	1621.6	1592.9	1558.8	1488.8	1399.1	1289.7	1192.9	1135.5	1108.6
147.5°	1708.4	1699.8	1680.1	1646.3	1617.6	1550.5	1468.7	1371.9	1272.5	1201.5	1166.7
150°	1740.0	1732.8	1713.1	1680.8	1652.1	1589.3	1510.4	1420.7	1325.6	1250.3	1205.4
152.5°	1770.1	1762.9	1740.3	1708.0	1683.6	1625.2	1553.4	1468.0	1371.5	1296.2	1249.9
155°	1809.9	1801.0	1779.4	1748.9	1727.4	1673.6	1607.2	1531.9	1449.4	1370.4	1318.4
157.5°	1841.5	1830.4	1810.3	1784.1	1761.1	1711.6	1653.9	1588.9	1516.8	1441.5	1388.4
160°	1860.1	1847.6	1826.1	1802.7	1781.2	1734.6	1682.6	1623.4	1557.0	1488.8	1431.4
162.5°	1873.1	1861.9	1836.1	1815.7	1797.0	1754.7	1705.5	1652.1	1592.9	1533.3	1480.2
165°	1887.1	1874.5	1847.6	1831.4	1815.3	1779.4	1736.4	1693.3	1643.1	1594.7	1551.6
167.5°	1888.1	1877.7	1850.8	1835.0	1823.2	1792.3	1757.5	1724.5	1685.4	1647.4	1611.5
170°	1885.3	1876.3	1849.4	1835.0	1826.1	1801.0	1770.5	1741.8	1711.3	1679.0	1650.3
172.5°	1875.2	1866.2	1840.8	1829.3	1824.6	1802.4	1777.6	1756.1	1729.9	1706.2	1683.3
175°	1849.4	1842.2	1820.7	1813.5	1815.3	1801.0	1783.0	1770.5	1754.3	1740.0	1727.4
177.5°	1811.7	1807.4	1791.6	1791.6	1797.4	1788.8	1783.0	1777.3	1770.1	1765.8	1761.5
180°	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1427554

CATALOG NUMBER: SQ2W-BBM-K-125U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8	3535.8
2.5°	3519.5	3520.4	3534.9	3545.0	3541.8	3538.7	3541.8	3545.0	3534.9	3520.4	3519.5
5°	3517.8	3521.7	3542.9	3558.4	3556.9	3555.3	3556.9	3558.4	3542.9	3521.7	3517.8
7.5°	3525.3	3529.4	3546.8	3558.9	3555.0	3551.0	3555.0	3558.9	3546.8	3529.4	3525.3
10°	3524.2	3525.4	3543.5	3556.1	3552.1	3548.2	3552.1	3556.1	3543.5	3525.4	3524.2
12.5°	3524.4	3519.3	3533.6	3542.6	3535.5	3528.4	3535.5	3542.6	3533.6	3519.3	3524.4
15°	3513.6	3496.3	3498.7	3497.9	3487.7	3477.5	3487.7	3497.9	3498.7	3496.3	3513.6
17.5°	3464.9	3436.0	3427.4	3417.2	3402.8	3388.3	3402.8	3417.2	3427.4	3436.0	3464.9
20°	3410.8	3376.3	3361.3	3347.0	3334.4	3321.8	3334.4	3347.0	3361.3	3376.3	3410.8
22.5°	3337.4	3302.2	3283.5	3266.9	3256.9	3246.8	3256.9	3266.9	3283.5	3302.2	3337.4
25°	3193.1	3160.9	3146.7	3134.7	3129.2	3123.7	3129.2	3134.7	3146.7	3160.9	3193.1
27.5°	3007.1	2979.4	2961.8	2946.8	2939.8	2932.7	2939.8	2946.8	2961.8	2979.4	3007.1
30°	2870.8	2847.2	2828.3	2810.8	2797.5	2784.1	2797.5	2810.8	2828.3	2847.2	2870.8
32.5°	2712.4	2692.0	2671.2	2652.3	2639.0	2625.6	2639.0	2652.3	2671.2	2692.0	2712.4
35°	2440.8	2421.9	2401.4	2383.2	2371.4	2359.6	2371.4	2383.2	2401.4	2421.9	2440.8
37.5°	2111.0	2093.5	2071.5	2052.5	2042.6	2032.7	2042.6	2052.5	2071.5	2093.5	2111.0
40°	1855.9	1840.5	1824.8	1809.3	1794.4	1779.4	1794.4	1809.3	1824.8	1840.5	1855.9
42.5°	1603.7	1583.9	1558.8	1538.4	1532.3	1526.1	1532.3	1538.4	1558.8	1583.9	1603.7
45°	1211.4	1202.8	1174.5	1133.0	1052.0	971.1	1052.0	1133.0	1174.5	1202.8	1211.4
47.5°	806.0	791.4	710.7	628.8	543.1	457.4	543.1	628.8	710.7	791.4	806.0
50°	568.6	553.6	433.4	335.9	306.8	277.7	306.8	335.9	433.4	553.6	568.6
52.5°	386.0	380.8	291.4	220.2	203.6	187.1	203.6	220.2	291.4	380.8	386.0
55°	176.5	175.7	138.0	108.5	103.8	99.1	103.8	108.5	138.0	175.7	176.5
57.5°	77.5	77.9	64.5	52.6	44.8	37.1	44.8	52.6	64.5	77.9	77.5
60°	42.3	41.1	27.7	15.9	8.8	1.8	8.8	15.9	27.7	41.1	42.3
62.5°	24.2	23.9	13.1	4.4	2.4	0.4	2.4	4.4	13.1	23.9	24.2
65°	1.4	1.4	0.6	0.0	0.0	0.0	0.0	0.6	1.4	1.4	1.4
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	8.3	10.8	13.3	14.7	16.1	15.4	16.1	14.7	13.3	10.8	8.3
90°	41.3	53.8	66.4	73.5	80.7	77.1	80.7	73.5	66.4	53.8	41.3
92.5°	82.9	104.0	119.5	132.4	138.1	137.4	138.1	132.4	119.5	104.0	82.9
95°	166.8	191.9	217.0	235.0	245.7	242.2	245.7	235.0	217.0	191.9	166.8
97.5°	257.2	291.0	318.9	335.8	346.6	353.7	346.6	335.8	318.9	291.0	257.2
100°	317.5	349.8	382.1	401.8	419.7	426.9	419.7	401.8	382.1	349.8	317.5
102.5°	366.3	408.6	443.8	464.9	480.0	487.2	480.0	464.9	443.8	408.6	366.3
105°	446.7	491.5	529.2	556.1	572.2	577.6	572.2	556.1	529.2	491.5	446.7
107.5°	527.0	573.3	608.1	637.9	657.6	669.1	657.6	608.1	573.3	527.0	527.0
110°	590.2	627.8	665.5	692.4	712.1	719.3	712.1	692.4	665.5	627.8	590.2



TEST NUMBER: P1427554

CATALOG NUMBER: SQ2W-BBM-K-125U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	643.2	685.2	722.9	749.8	772.4	782.4	772.4	749.8	722.9	685.2	643.2
115°	717.5	773.1	807.2	832.3	848.5	857.4	848.5	832.3	807.2	773.1	717.5
117.5°	779.2	837.3	874.6	894.0	901.6	908.0	901.6	894.0	874.6	837.3	779.2
120°	818.0	871.8	914.8	939.9	948.9	952.5	948.9	939.9	914.8	871.8	818.0
122.5°	853.8	904.8	946.4	977.3	992.0	995.5	992.0	977.3	946.4	904.8	853.8
125°	904.1	952.5	995.5	1026.0	1042.2	1051.2	1042.2	1026.0	995.5	952.5	904.1
127.5°	947.8	1000.2	1039.7	1067.3	1083.1	1090.3	1083.1	1067.3	1039.7	1000.2	947.8
130°	972.2	1026.0	1065.5	1096.0	1110.3	1117.5	1110.3	1096.0	1065.5	1026.0	972.2
132.5°	990.9	1047.6	1088.5	1116.1	1131.9	1139.0	1131.9	1116.1	1088.5	1047.6	990.9
135°	1013.5	1072.7	1115.7	1142.6	1157.0	1164.2	1157.0	1142.6	1115.7	1072.7	1013.5
137.5°	1033.2	1087.0	1131.9	1160.2	1173.1	1177.8	1173.1	1160.2	1131.9	1087.0	1033.2
140°	1047.6	1094.2	1139.0	1166.0	1180.3	1182.1	1180.3	1166.0	1139.0	1094.2	1047.6
142.5°	1066.2	1102.8	1141.9	1168.8	1183.2	1186.4	1183.2	1168.8	1141.9	1102.8	1066.2
145°	1099.6	1121.1	1148.0	1173.1	1185.7	1189.3	1185.7	1173.1	1148.0	1121.1	1099.6
147.5°	1141.6	1148.4	1162.4	1178.9	1191.1	1193.6	1191.1	1178.9	1162.4	1148.4	1141.6
150°	1173.1	1171.3	1176.7	1187.5	1198.2	1196.5	1198.2	1187.5	1176.7	1171.3	1173.1
152.5°	1209.0	1198.6	1198.2	1203.3	1208.3	1207.9	1208.3	1203.3	1198.2	1198.6	1209.0
155°	1270.0	1250.3	1239.5	1235.9	1235.9	1234.1	1235.9	1235.9	1239.5	1250.3	1270.0
157.5°	1337.1	1309.5	1293.3	1284.7	1282.2	1278.2	1282.2	1284.7	1293.3	1309.5	1337.1
160°	1383.0	1352.5	1336.4	1322.0	1316.6	1311.3	1316.6	1322.0	1336.4	1352.5	1383.0
162.5°	1426.1	1397.0	1379.4	1366.5	1361.1	1352.9	1361.1	1366.5	1379.4	1397.0	1426.1
165°	1496.0	1465.5	1445.8	1435.0	1427.8	1420.7	1427.8	1435.0	1445.8	1465.5	1496.0
167.5°	1566.0	1532.6	1519.7	1507.5	1500.7	1487.8	1500.7	1507.5	1519.7	1532.6	1566.0
170°	1609.0	1578.5	1571.4	1560.6	1548.0	1533.7	1548.0	1560.6	1571.4	1578.5	1609.0
172.5°	1646.3	1625.9	1618.7	1607.9	1604.0	1592.5	1604.0	1607.9	1618.7	1625.9	1646.3
175°	1700.5	1684.4	1684.4	1682.6	1677.2	1666.4	1677.2	1682.6	1684.4	1684.4	1700.5
177.5°	1745.7	1737.1	1742.8	1742.8	1741.4	1731.4	1741.4	1742.8	1742.8	1737.1	1745.7
180°	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1427554

CATALOG NUMBER: SQ2W-BBM-K-125U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	3535.8	3535.8	3535.8	3535.8
2.5°	3532.1	3542.6	3547.0	3551.4
5°	3531.1	3542.1	3546.1	3550.0
7.5°	3534.8	3542.5	3545.2	3547.9
10°	3540.0	3552.0	3552.7	3553.5
12.5°	3548.9	3566.1	3561.2	3556.4
15°	3550.6	3574.9	3561.6	3548.2
17.5°	3514.1	3546.3	3527.5	3508.6
20°	3465.1	3500.3	3478.3	3456.2
22.5°	3389.1	3422.9	3402.8	3382.7
25°	3243.4	3277.8	3264.4	3251.1
27.5°	3044.8	3072.2	3068.4	3064.6
30°	2899.1	2920.3	2920.3	2920.3
32.5°	2732.6	2748.1	2750.0	2751.9
35°	2458.0	2468.9	2460.2	2451.6
37.5°	2124.1	2133.1	2129.8	2126.5
40°	1870.8	1881.8	1881.0	1880.2
42.5°	1618.0	1624.7	1608.9	1593.0
45°	1200.4	1174.7	1104.7	1034.7
47.5°	754.6	694.2	607.1	520.0
50°	478.2	397.4	345.5	293.6
52.5°	306.9	241.9	218.9	196.0
55°	140.3	111.6	105.3	99.1
57.5°	63.3	50.6	42.1	33.6
60°	31.2	21.0	13.2	5.3
62.5°	13.8	5.5	3.3	1.1
65°	0.6	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0
87.5°	6.5	3.9	2.5	1.1
90°	32.3	19.7	12.6	5.4
92.5°	69.6	48.4	34.1	19.7
95°	139.9	111.2	78.9	55.6
97.5°	222.8	176.5	144.6	106.2
100°	267.3	222.4	191.9	150.7
102.5°	316.1	278.4	236.4	195.2
105°	403.6	357.0	308.5	261.9
107.5°	484.7	433.4	375.3	333.3
110°	536.3	480.7	419.7	382.1



TEST NUMBER: P1427554

CATALOG NUMBER: SQ2W-BBM-K-125U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	586.6	529.5	467.1	429.4
115°	654.7	591.9	534.5	502.3
117.5°	720.4	655.8	595.2	569.7
120°	760.6	696.0	636.8	617.1
122.5°	793.6	730.4	675.5	667.3
125°	843.1	778.5	731.9	742.6
127.5°	883.3	824.1	794.6	818.7
130°	907.7	855.6	837.7	871.8
132.5°	929.2	888.6	880.7	927.7
135°	961.5	938.1	945.3	1009.9
137.5°	999.9	990.9	1014.9	1096.4
140°	1024.2	1029.6	1063.7	1155.2
142.5°	1057.3	1069.8	1113.9	1211.2
145°	1108.6	1135.5	1192.9	1289.7
147.5°	1166.7	1201.5	1272.5	1371.9
150°	1205.4	1250.3	1325.6	1420.7
152.5°	1249.9	1296.2	1371.5	1468.0
155°	1318.4	1370.4	1449.4	1531.9
157.5°	1388.4	1441.5	1516.8	1588.9
160°	1431.4	1488.8	1557.0	1623.4
162.5°	1480.2	1533.3	1592.9	1652.1
165°	1551.6	1594.7	1643.1	1693.3
167.5°	1611.5	1647.4	1685.4	1724.5
170°	1650.3	1679.0	1711.3	1741.8
172.5°	1683.3	1706.2	1729.9	1756.1
175°	1727.4	1740.0	1754.3	1770.5
177.5°	1761.5	1765.8	1770.1	1777.3
180°	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1427554
 CATALOG NUMBER: SQ2W-BBM-K-125U-125D-L940-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.42	0.70	1.40	2.67	0.00	0.65	0.93	1.62	2.90
	3H	0.00	0.15	0.52	1.13	2.43	0.00	0.37	0.75	1.36	2.66
	4H	0.00	0.00	0.43	0.99	2.30	0.00	0.23	0.65	1.22	2.53
	6H	0.00	0.00	0.32	0.84	2.16	0.00	0.07	0.55	1.07	2.38
	8H	0.00	0.00	0.27	0.76	2.08	0.00	0.00	0.50	0.99	2.31
	12H	0.00	0.00	0.21	0.67	2.01	0.00	0.00	0.44	0.90	2.23
4H	2H	0.00	0.01	0.44	1.00	2.31	0.00	0.24	0.67	1.23	2.54
	3H	0.00	0.00	0.24	0.72	2.04	0.00	0.00	0.47	0.95	2.27
	4H	0.00	0.00	0.14	0.56	1.90	0.00	0.00	0.36	0.79	2.13
	6H	0.00	0.00	0.04	0.41	1.75	0.00	0.00	0.27	0.64	1.98
	8H	0.00	0.00	0.00	0.31	1.66	0.00	0.00	0.20	0.54	1.89
	12H	0.00	0.00	0.00	0.22	1.58	0.00	0.00	0.14	0.45	1.80
8H	4H	0.00	0.00	0.00	0.31	1.66	0.00	0.00	0.20	0.54	1.89
	6H	0.00	0.00	0.00	0.17	1.52	0.00	0.00	0.10	0.40	1.75
	8H	0.00	0.00	0.00	0.06	1.43	0.00	0.00	0.05	0.29	1.66
	12H	0.00	0.00	0.00	0.00	1.37	0.00	0.00	0.00	0.18	1.60
12H	4H	0.00	0.00	0.00	0.22	1.58	0.00	0.00	0.14	0.45	1.80
	6H	0.00	0.00	0.00	0.06	1.43	0.00	0.00	0.05	0.29	1.66
	8H	0.00	0.00	0.00	0.00	1.37	0.00	0.00	0.00	0.18	1.60