

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427629

Luminaire Tested: SQ2W-BBN-K-125U-050D-L940-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2024
Report Number: P1427629
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G3-2308-130-1)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-BBN-K-125U-050D-L940-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - BLACK DISCREET BAFFLE, NARROW 35-DEGREE OPTIC
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7325.7 lumens
Efficiency: N/A
Efficacy: 118.0 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.62
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 62.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427629

CATALOG NUMBER: SQ2W-BBN-K-125U-050D-L940-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

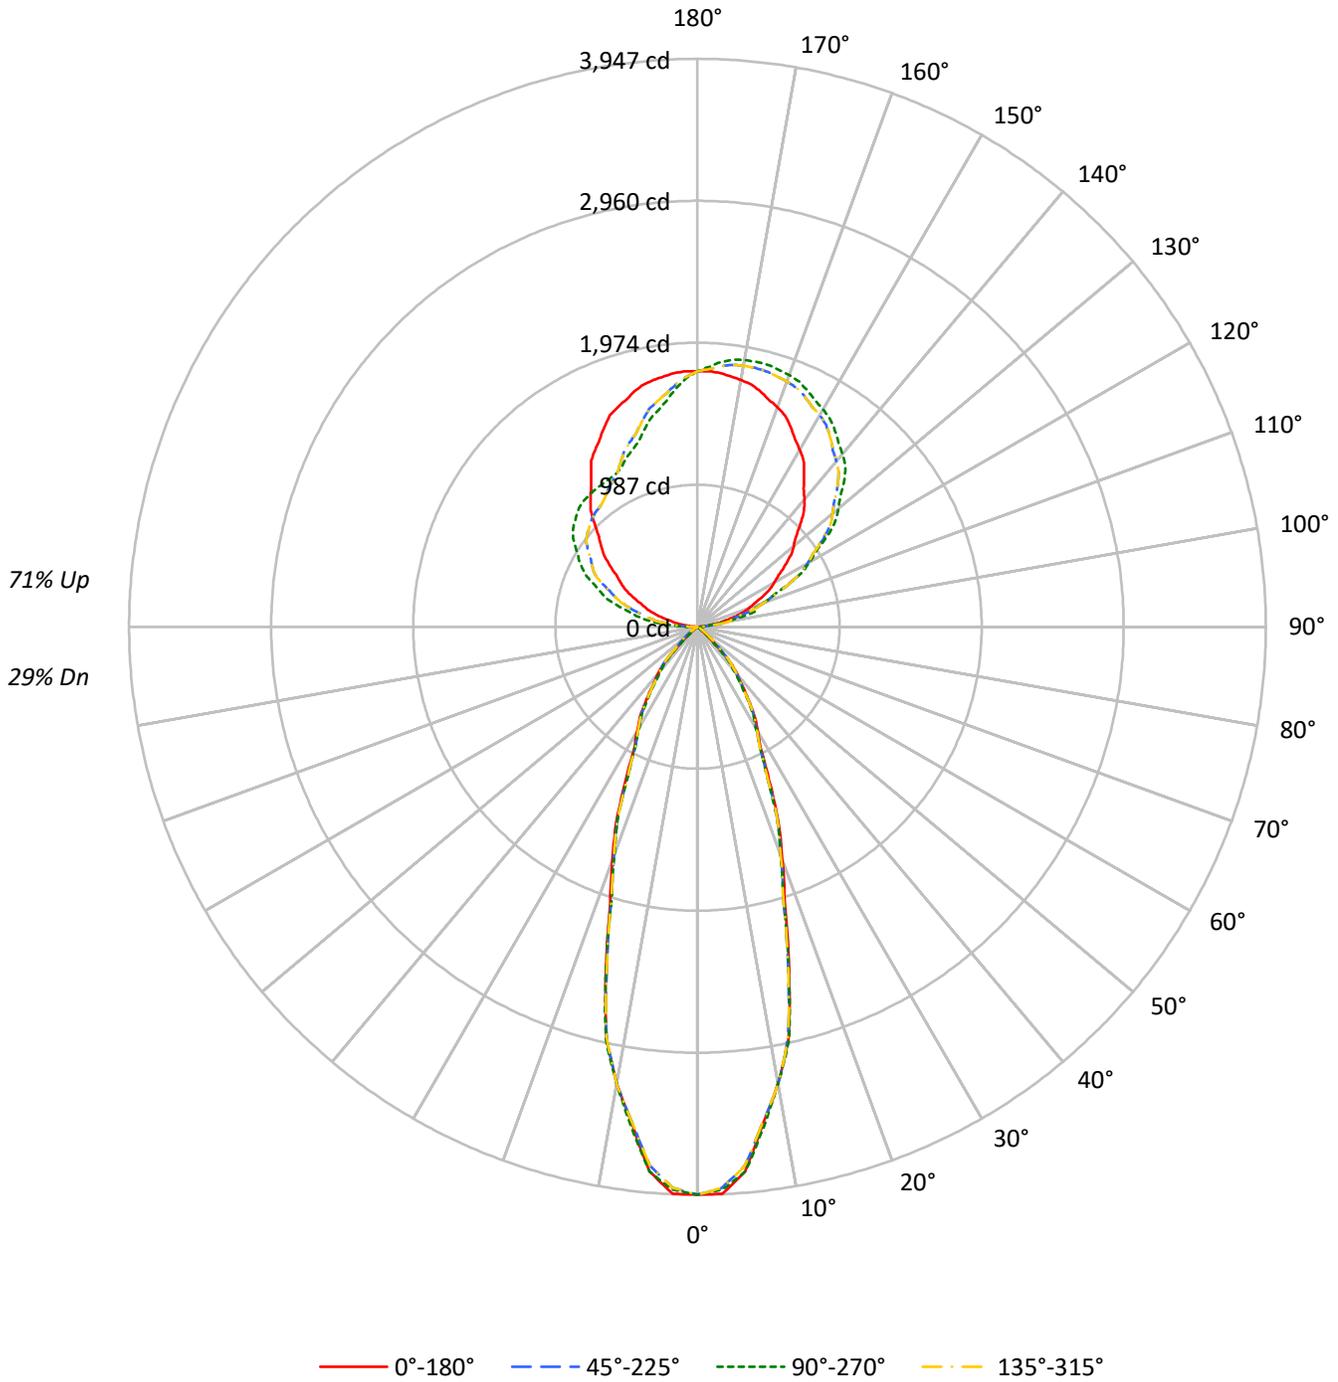



TEST NUMBER: P1427629

CATALOG NUMBER: SQ2W-BBN-K-125U-050D-L940-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	37	37	37	29
1	95	91	88	85	85	82	79	77	65	63	62	49	48	47	35	34	34	27
2	87	81	76	72	78	73	69	66	59	56	54	45	44	42	33	32	31	26
3	81	73	67	62	73	66	61	57	54	50	47	42	40	38	31	30	29	24
4	75	66	59	54	68	60	54	50	49	45	42	39	36	34	29	28	27	23
5	70	60	53	48	63	55	49	45	45	41	38	36	33	31	27	26	25	21
6	65	55	48	43	59	50	44	40	41	37	34	33	31	28	26	24	23	20
7	61	50	43	39	55	46	40	36	38	34	31	31	28	26	24	23	21	19
8	57	46	39	35	51	43	37	33	36	31	28	29	26	24	23	21	20	18
9	53	43	36	32	48	39	34	30	33	29	26	27	25	23	22	20	19	17
10	50	40	33	29	46	37	31	28	31	27	24	26	23	21	21	19	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	63720	63720	63720	63720
5°	61587	61623	61587	61623
10°	52856	52856	52856	52856
15°	41026	40930	41026	40930
20°	29609	28974	29609	28974
25°	20995	20196	20995	20196
30°	15619	15077	15619	15077
35°	12153	11593	12153	11593
40°	8993	8214	8993	8214
45°	4596	3704	4596	3704
50°	1000	733	1000	733
55°	281	220	281	220
60°	45	23	45	23
65°	0	0	0	0
70°	0	0	0	0
75°	0	0	0	0
80°	0	0	0	0
85°	0	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 260°
 Vertical Angle: 87.5°
 Luminance: 5959 cd/sqm



TEST NUMBER: P1427629

CATALOG NUMBER: SQ2W-BBN-K-125U-050D-L940-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	341.3	4.7
10°-20°	672.8	9.2
20°-30°	542.7	7.4
30°-40°	377.0	5.1
40°-50°	174.2	2.4
50°-60°	24.4	0.3
60°-70°	0.8	0.0
70°-80°	0.0	0.0
80°-90°	9.4	0.1
90°-100°	141.3	1.9
100°-110°	412.2	5.6
110°-120°	672.6	9.2
120°-130°	853.5	11.7
130°-140°	913.3	12.5
140°-150°	852.8	11.6
150°-160°	701.7	9.6
160°-170°	470.6	6.4
170°-180°	167.1	2.3
0°-30°	1556.8	21.3
0°-40°	1933.9	26.4
0°-60°	2132.4	29.1
0°-90°	2142.7	29.2
90°-120°	1226.1	16.7
90°-150°	3845.7	52.5
90°-180°	5185.0	70.8
0°-180°	7325.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	3947	3947	3947	3947	3947	
5°	3800	3802	3800	3802	3800	341
15°	2454	2449	2454	2449	2454	676
25°	1178	1134	1178	1134	1178	552
35°	617	588	617	588	617	386
45°	201	162	201	162	201	163
55°	10	8	10	8	10	13
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	5	40	5	77	5	4
95°	56	41	56	242	56	67
105°	262	420	262	578	262	279
115°	502	696	502	857	502	495
125°	743	1103	743	1051	743	664
135°	1010	1444	1010	1164	1010	780
145°	1290	1665	1290	1189	1290	807
155°	1532	1808	1532	1234	1532	704
165°	1693	1885	1693	1421	1693	477
175°	1770	1846	1770	1666	1770	168
180°	1776	1776	1776	1776	1776	



TEST NUMBER: P1427629

CATALOG NUMBER: SQ2W-BBN-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6
2.5°	3944.3	3937.7	3931.1	3918.1	3902.9	3902.3	3916.2	3925.6	3921.3	3917.0	3921.3
5°	3800.0	3790.9	3781.7	3770.6	3758.9	3763.4	3783.9	3799.6	3800.9	3802.2	3800.9
7.5°	3481.7	3484.7	3487.6	3480.0	3468.9	3474.7	3497.5	3513.9	3511.5	3509.0	3511.5
10°	3224.0	3226.2	3228.4	3228.0	3226.7	3229.9	3237.5	3241.0	3232.5	3224.0	3232.5
12.5°	2925.2	2934.0	2942.8	2932.7	2916.2	2913.7	2925.1	2934.5	2938.1	2941.7	2938.1
15°	2454.4	2468.6	2482.9	2462.7	2431.1	2422.9	2438.1	2449.4	2449.0	2448.7	2449.0
17.5°	2012.9	2011.4	2010.0	1997.5	1981.4	1974.8	1977.6	1979.5	1978.6	1977.6	1978.6
20°	1723.3	1721.1	1718.9	1708.1	1694.5	1686.6	1684.4	1683.1	1684.7	1686.3	1684.7
22.5°	1475.2	1471.5	1467.7	1463.3	1458.5	1453.4	1447.9	1444.3	1446.4	1448.5	1446.4
25°	1178.5	1166.5	1154.5	1144.8	1136.0	1135.3	1142.9	1147.0	1140.3	1133.7	1140.3
27.5°	945.9	945.7	945.5	939.9	932.3	929.0	929.8	930.7	932.0	933.3	932.0
30°	837.8	835.6	833.4	827.4	820.1	816.6	817.0	816.2	812.4	808.7	812.4
32.5°	741.7	743.2	744.8	738.4	729.4	724.0	722.3	720.1	716.3	712.5	716.3
35°	616.6	616.6	616.6	611.4	604.5	598.6	593.9	590.1	589.1	588.2	589.1
37.5°	500.7	500.1	499.6	495.7	490.8	485.0	478.3	472.6	470.2	467.7	470.2
40°	426.7	425.2	423.6	420.8	417.6	412.0	403.7	396.7	393.2	389.7	393.2
42.5°	342.5	346.8	351.0	349.7	346.5	340.8	332.6	325.1	319.9	314.6	319.9
45°	201.3	219.0	236.7	243.0	245.5	242.1	232.6	218.4	190.3	162.2	190.3
47.5°	86.5	106.0	125.4	141.8	157.1	152.2	127.3	102.7	79.3	55.9	79.3
50°	39.8	55.0	70.2	90.6	112.7	108.1	76.8	50.7	39.9	29.2	39.9
52.5°	23.3	30.9	38.5	57.6	80.4	78.4	51.4	29.7	24.0	18.3	24.0
55°	10.0	12.5	15.0	25.4	38.3	37.7	23.5	12.2	10.0	7.8	10.0
57.5°	3.7	5.1	6.5	10.2	14.7	14.4	9.3	5.3	4.1	3.0	4.1
60°	1.4	2.1	2.7	4.5	6.7	6.6	4.0	2.0	1.3	0.7	1.3
62.5°	0.3	0.7	1.0	2.0	3.2	3.2	1.9	0.9	0.5	0.1	0.5
65°	0.0	0.0	0.0	0.2	0.6	0.6	0.2	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	1.1	2.5	4.3	5.7	6.8	7.2	7.2	7.5	7.9	7.9	7.9
90°	5.4	12.6	21.5	28.7	34.1	35.9	35.9	37.7	39.5	39.5	39.5
92.5°	19.7	31.2	31.6	31.6	38.4	41.6	44.5	44.8	46.6	46.6	46.6
95°	55.6	61.0	91.5	89.7	61.0	48.4	41.3	41.3	41.3	41.3	41.3
97.5°	106.2	114.1	119.1	159.6	168.6	162.9	132.7	111.6	99.7	94.4	99.7
100°	150.7	154.3	165.0	166.8	211.7	254.7	233.2	206.3	197.3	191.9	197.3
102.5°	195.2	197.3	213.8	221.4	231.8	256.2	330.8	322.5	316.4	315.3	316.4
105°	261.9	263.7	294.2	308.5	315.7	315.7	313.9	349.8	407.2	419.7	407.2
107.5°	333.3	341.5	377.4	415.8	424.0	426.2	416.9	411.5	409.3	410.8	409.3
110°	382.1	394.6	437.7	486.1	498.7	502.3	498.7	493.3	489.7	489.7	489.7



TEST NUMBER: P1427629

CATALOG NUMBER: SQ2W-BBN-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	429.4	447.7	496.5	552.1	573.3	584.1	576.2	572.2	568.6	571.5	568.6
115°	502.3	529.2	593.7	651.1	694.2	699.6	697.8	697.8	696.0	696.0	696.0
117.5°	569.7	612.8	685.2	752.0	801.8	816.2	823.3	821.2	819.0	822.6	819.0
120°	617.1	667.3	749.8	825.1	873.6	895.1	902.3	898.7	902.3	898.7	902.3
122.5°	667.3	729.0	810.1	888.3	945.3	969.7	978.3	979.0	979.8	977.6	979.8
125°	742.6	818.0	913.0	993.8	1052.9	1081.6	1088.8	1090.6	1094.2	1103.2	1094.2
127.5°	818.7	904.1	1008.5	1086.3	1146.9	1181.7	1192.9	1196.8	1204.3	1208.3	1204.3
130°	871.8	968.6	1074.5	1148.0	1207.2	1244.9	1264.6	1270.0	1279.0	1277.2	1279.0
132.5°	927.7	1028.9	1136.2	1212.6	1267.5	1308.0	1324.9	1340.3	1343.5	1346.1	1343.5
135°	1009.9	1119.3	1226.9	1302.3	1354.3	1393.8	1415.3	1429.6	1438.6	1444.0	1438.6
137.5°	1096.4	1211.9	1315.2	1382.3	1434.7	1468.7	1493.1	1508.2	1517.5	1521.8	1517.5
140°	1155.2	1266.4	1366.9	1436.8	1483.5	1517.5	1539.1	1557.0	1567.8	1567.8	1567.8
142.5°	1211.2	1320.9	1418.5	1488.5	1529.4	1560.6	1583.5	1597.2	1609.4	1609.4	1609.4
145°	1289.7	1399.1	1488.8	1558.8	1592.9	1621.6	1646.7	1657.5	1664.6	1664.6	1664.6
147.5°	1371.9	1468.7	1550.5	1617.6	1646.3	1680.1	1699.8	1708.4	1717.4	1713.4	1717.4
150°	1420.7	1510.4	1589.3	1652.1	1680.8	1713.1	1732.8	1740.0	1748.9	1743.6	1748.9
152.5°	1468.0	1553.4	1625.2	1683.6	1708.0	1740.3	1762.9	1770.1	1776.2	1772.3	1776.2
155°	1531.9	1607.2	1673.6	1727.4	1748.9	1779.4	1801.0	1809.9	1817.1	1808.1	1817.1
157.5°	1588.9	1653.9	1711.6	1761.1	1784.1	1810.3	1830.4	1841.5	1848.7	1844.7	1848.7
160°	1623.4	1682.6	1734.6	1781.2	1802.7	1826.1	1847.6	1860.1	1867.3	1861.9	1867.3
162.5°	1652.1	1705.5	1754.7	1797.0	1815.7	1836.1	1861.9	1873.1	1880.2	1873.4	1880.2
165°	1693.3	1736.4	1779.4	1815.3	1831.4	1847.6	1874.5	1887.1	1892.4	1885.3	1892.4
167.5°	1724.5	1757.5	1792.3	1823.2	1835.0	1850.8	1877.7	1888.1	1894.9	1886.0	1894.9
170°	1741.8	1770.5	1801.0	1826.1	1835.0	1849.4	1876.3	1885.3	1890.6	1881.7	1890.6
172.5°	1756.1	1777.6	1802.4	1824.6	1829.3	1840.8	1866.2	1875.2	1879.2	1871.6	1879.2
175°	1770.5	1783.0	1801.0	1815.3	1813.5	1820.7	1842.2	1849.4	1856.6	1845.8	1856.6
177.5°	1777.3	1783.0	1788.8	1797.4	1791.6	1791.6	1807.4	1811.7	1813.2	1807.4	1813.2
180°	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1427629

CATALOG NUMBER: SQ2W-BBN-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6
2.5°	3925.6	3916.2	3902.3	3902.9	3918.1	3931.1	3937.7	3944.3	3937.7	3931.1	3918.1
5°	3799.6	3783.9	3763.4	3758.9	3770.6	3781.7	3790.9	3800.0	3790.9	3781.7	3770.6
7.5°	3513.9	3497.5	3474.7	3468.9	3480.0	3487.6	3484.7	3481.7	3484.7	3487.6	3480.0
10°	3241.0	3237.5	3229.9	3226.7	3228.0	3228.4	3226.2	3224.0	3226.2	3228.4	3228.0
12.5°	2934.5	2925.1	2913.7	2916.2	2932.7	2942.8	2934.0	2925.2	2934.0	2942.8	2932.7
15°	2449.4	2438.1	2422.9	2431.1	2462.7	2482.9	2468.6	2454.4	2468.6	2482.9	2462.7
17.5°	1979.5	1977.6	1974.8	1981.4	1997.5	2010.0	2011.4	2012.9	2011.4	2010.0	1997.5
20°	1683.1	1684.4	1686.6	1694.5	1708.1	1718.9	1721.1	1723.3	1721.1	1718.9	1708.1
22.5°	1444.3	1447.9	1453.4	1458.5	1463.3	1467.7	1471.5	1475.2	1471.5	1467.7	1463.3
25°	1147.0	1142.9	1135.3	1136.0	1144.8	1154.5	1166.5	1178.5	1166.5	1154.5	1144.8
27.5°	930.7	929.8	929.0	932.3	939.9	945.5	945.7	945.9	945.7	945.5	939.9
30°	816.2	817.0	816.6	820.1	827.4	833.4	835.6	837.8	835.6	833.4	827.4
32.5°	720.1	722.3	724.0	729.4	738.4	744.8	743.2	741.7	743.2	744.8	738.4
35°	590.1	593.9	598.6	604.5	611.4	616.6	616.6	616.6	616.6	616.6	611.4
37.5°	472.6	478.3	485.0	490.8	495.7	499.6	500.1	500.7	500.1	499.6	495.7
40°	396.7	403.7	412.0	417.6	420.8	423.6	425.2	426.7	425.2	423.6	420.8
42.5°	325.1	332.6	340.8	346.5	349.7	351.0	346.8	342.5	346.8	351.0	349.7
45°	218.4	232.6	242.1	245.5	243.0	236.7	219.0	201.3	219.0	236.7	243.0
47.5°	102.7	127.3	152.2	157.1	141.8	125.4	106.0	86.5	106.0	125.4	141.8
50°	50.7	76.8	108.1	112.7	90.6	70.2	55.0	39.8	55.0	70.2	90.6
52.5°	29.7	51.4	78.4	80.4	57.6	38.5	30.9	23.3	30.9	38.5	57.6
55°	12.2	23.5	37.7	38.3	25.4	15.0	12.5	10.0	12.5	15.0	25.4
57.5°	5.3	9.3	14.4	14.7	10.2	6.5	5.1	3.7	5.1	6.5	10.2
60°	2.0	4.0	6.6	6.7	4.5	2.7	2.1	1.4	2.1	2.7	4.5
62.5°	0.9	1.9	3.2	3.2	2.0	1.0	0.7	0.3	0.7	1.0	2.0
65°	0.0	0.2	0.6	0.6	0.2	0.0	0.0	0.0	0.0	0.0	0.2
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	7.5	7.2	7.2	6.8	5.7	4.3	2.5	1.1	2.5	3.9	6.5
90°	37.7	35.9	35.9	34.1	28.7	21.5	12.6	5.4	12.6	19.7	32.3
92.5°	44.8	44.5	41.6	38.4	31.6	31.6	31.2	19.7	34.1	48.4	69.6
95°	41.3	41.3	48.4	61.0	89.7	91.5	61.0	55.6	78.9	111.2	139.9
97.5°	111.6	132.7	162.9	168.6	159.6	119.1	114.1	106.2	144.6	176.5	222.8
100°	206.3	233.2	254.7	211.7	166.8	165.0	154.3	150.7	191.9	222.4	267.3
102.5°	322.5	330.8	256.2	231.8	221.4	213.8	197.3	195.2	236.4	278.4	316.1
105°	349.8	313.9	315.7	315.7	308.5	294.2	263.7	261.9	308.5	357.0	403.6
107.5°	411.5	416.9	426.2	424.0	415.8	377.4	341.5	333.3	375.3	433.4	484.7
110°	493.3	498.7	502.3	498.7	486.1	437.7	394.6	382.1	419.7	480.7	536.3



TEST NUMBER: P1427629

CATALOG NUMBER: SQ2W-BBN-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	572.2	576.2	584.1	573.3	552.1	496.5	447.7	429.4	467.1	529.5	586.6
115°	697.8	697.8	699.6	694.2	651.1	593.7	529.2	502.3	534.5	591.9	654.7
117.5°	821.2	823.3	816.2	801.8	752.0	685.2	612.8	569.7	595.2	655.8	720.4
120°	898.7	902.3	895.1	873.6	825.1	749.8	667.3	617.1	636.8	696.0	760.6
122.5°	979.0	978.3	969.7	945.3	888.3	810.1	729.0	667.3	675.5	730.4	793.6
125°	1090.6	1088.8	1081.6	1052.9	993.8	913.0	818.0	742.6	731.9	778.5	843.1
127.5°	1196.8	1192.9	1181.7	1146.9	1086.3	1008.5	904.1	818.7	794.6	824.1	883.3
130°	1270.0	1264.6	1244.9	1207.2	1148.0	1074.5	968.6	871.8	837.7	855.6	907.7
132.5°	1340.3	1324.9	1308.0	1267.5	1212.6	1136.2	1028.9	927.7	880.7	888.6	929.2
135°	1429.6	1415.3	1393.8	1354.3	1302.3	1226.9	1119.3	1009.9	945.3	938.1	961.5
137.5°	1508.2	1493.1	1468.7	1434.7	1382.3	1315.2	1211.9	1096.4	1014.9	990.9	999.9
140°	1557.0	1539.1	1517.5	1483.5	1436.8	1366.9	1266.4	1155.2	1063.7	1029.6	1024.2
142.5°	1597.2	1583.5	1560.6	1529.4	1488.5	1418.5	1320.9	1211.2	1113.9	1069.8	1057.3
145°	1657.5	1646.7	1621.6	1592.9	1558.8	1488.8	1399.1	1289.7	1192.9	1135.5	1108.6
147.5°	1708.4	1699.8	1680.1	1646.3	1617.6	1550.5	1468.7	1371.9	1272.5	1201.5	1166.7
150°	1740.0	1732.8	1713.1	1680.8	1652.1	1589.3	1510.4	1420.7	1325.6	1250.3	1205.4
152.5°	1770.1	1762.9	1740.3	1708.0	1683.6	1625.2	1553.4	1468.0	1371.5	1296.2	1249.9
155°	1809.9	1801.0	1779.4	1748.9	1727.4	1673.6	1607.2	1531.9	1449.4	1370.4	1318.4
157.5°	1841.5	1830.4	1810.3	1784.1	1761.1	1711.6	1653.9	1588.9	1516.8	1441.5	1388.4
160°	1860.1	1847.6	1826.1	1802.7	1781.2	1734.6	1682.6	1623.4	1557.0	1488.8	1431.4
162.5°	1873.1	1861.9	1836.1	1815.7	1797.0	1754.7	1705.5	1652.1	1592.9	1533.3	1480.2
165°	1887.1	1874.5	1847.6	1831.4	1815.3	1779.4	1736.4	1693.3	1643.1	1594.7	1551.6
167.5°	1888.1	1877.7	1850.8	1835.0	1823.2	1792.3	1757.5	1724.5	1685.4	1647.4	1611.5
170°	1885.3	1876.3	1849.4	1835.0	1826.1	1801.0	1770.5	1741.8	1711.3	1679.0	1650.3
172.5°	1875.2	1866.2	1840.8	1829.3	1824.6	1802.4	1777.6	1756.1	1729.9	1706.2	1683.3
175°	1849.4	1842.2	1820.7	1813.5	1815.3	1801.0	1783.0	1770.5	1754.3	1740.0	1727.4
177.5°	1811.7	1807.4	1791.6	1791.6	1797.4	1788.8	1783.0	1777.3	1770.1	1765.8	1761.5
180°	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1427629

CATALOG NUMBER: SQ2W-BBN-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6	3946.6
2.5°	3902.9	3902.3	3916.2	3925.6	3921.3	3917.0	3921.3	3925.6	3916.2	3902.3	3902.9
5°	3758.9	3763.4	3783.9	3799.6	3800.9	3802.2	3800.9	3799.6	3783.9	3763.4	3758.9
7.5°	3468.9	3474.7	3497.5	3513.9	3511.5	3509.0	3511.5	3513.9	3497.5	3474.7	3468.9
10°	3226.7	3229.9	3237.5	3241.0	3232.5	3224.0	3232.5	3241.0	3237.5	3229.9	3226.7
12.5°	2916.2	2913.7	2925.1	2934.5	2938.1	2941.7	2938.1	2934.5	2925.1	2913.7	2916.2
15°	2431.1	2422.9	2438.1	2449.4	2449.0	2448.7	2449.0	2449.4	2438.1	2422.9	2431.1
17.5°	1981.4	1974.8	1977.6	1979.5	1978.6	1977.6	1978.6	1979.5	1977.6	1974.8	1981.4
20°	1694.5	1686.6	1684.4	1683.1	1684.7	1686.3	1684.7	1683.1	1684.4	1686.6	1694.5
22.5°	1458.5	1453.4	1447.9	1444.3	1446.4	1448.5	1446.4	1444.3	1447.9	1453.4	1458.5
25°	1136.0	1135.3	1142.9	1147.0	1140.3	1133.7	1140.3	1147.0	1142.9	1135.3	1136.0
27.5°	932.3	929.0	929.8	930.7	932.0	933.3	932.0	930.7	929.8	929.0	932.3
30°	820.1	816.6	817.0	816.2	812.4	808.7	812.4	816.2	817.0	816.6	820.1
32.5°	729.4	724.0	722.3	720.1	716.3	712.5	716.3	720.1	722.3	724.0	729.4
35°	604.5	598.6	593.9	590.1	589.1	588.2	589.1	590.1	593.9	598.6	604.5
37.5°	490.8	485.0	478.3	472.6	470.2	467.7	470.2	472.6	478.3	485.0	490.8
40°	417.6	412.0	403.7	396.7	393.2	389.7	393.2	396.7	403.7	412.0	417.6
42.5°	346.5	340.8	332.6	325.1	319.9	314.6	319.9	325.1	332.6	340.8	346.5
45°	245.5	242.1	232.6	218.4	190.3	162.2	190.3	218.4	232.6	242.1	245.5
47.5°	157.1	152.2	127.3	102.7	79.3	55.9	79.3	102.7	127.3	152.2	157.1
50°	112.7	108.1	76.8	50.7	39.9	29.2	39.9	50.7	76.8	108.1	112.7
52.5°	80.4	78.4	51.4	29.7	24.0	18.3	24.0	29.7	51.4	78.4	80.4
55°	38.3	37.7	23.5	12.2	10.0	7.8	10.0	12.2	23.5	37.7	38.3
57.5°	14.7	14.4	9.3	5.3	4.1	3.0	4.1	5.3	9.3	14.4	14.7
60°	6.7	6.6	4.0	2.0	1.3	0.7	1.3	2.0	4.0	6.6	6.7
62.5°	3.2	3.2	1.9	0.9	0.5	0.1	0.5	0.9	1.9	3.2	3.2
65°	0.6	0.6	0.2	0.0	0.0	0.0	0.0	0.0	0.2	0.6	0.6
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	8.3	10.8	13.3	14.7	16.1	15.4	16.1	14.7	13.3	10.8	8.3
90°	41.3	53.8	66.4	73.5	80.7	77.1	80.7	73.5	66.4	53.8	41.3
92.5°	82.9	104.0	119.5	132.4	138.1	137.4	138.1	132.4	119.5	104.0	82.9
95°	166.8	191.9	217.0	235.0	245.7	242.2	245.7	235.0	217.0	191.9	166.8
97.5°	257.2	291.0	318.9	335.8	346.6	353.7	346.6	335.8	318.9	291.0	257.2
100°	317.5	349.8	382.1	401.8	419.7	426.9	419.7	401.8	382.1	349.8	317.5
102.5°	366.3	408.6	443.8	464.9	480.0	487.2	480.0	464.9	443.8	408.6	366.3
105°	446.7	491.5	529.2	556.1	572.2	577.6	572.2	556.1	529.2	491.5	446.7
107.5°	527.0	573.3	608.1	637.9	657.6	669.1	657.6	608.1	573.3	527.0	527.0
110°	590.2	627.8	665.5	692.4	712.1	719.3	712.1	692.4	665.5	627.8	590.2



TEST NUMBER: P1427629

CATALOG NUMBER: SQ2W-BBN-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	643.2	685.2	722.9	749.8	772.4	782.4	772.4	749.8	722.9	685.2	643.2
115°	717.5	773.1	807.2	832.3	848.5	857.4	848.5	832.3	807.2	773.1	717.5
117.5°	779.2	837.3	874.6	894.0	901.6	908.0	901.6	894.0	874.6	837.3	779.2
120°	818.0	871.8	914.8	939.9	948.9	952.5	948.9	939.9	914.8	871.8	818.0
122.5°	853.8	904.8	946.4	977.3	992.0	995.5	992.0	977.3	946.4	904.8	853.8
125°	904.1	952.5	995.5	1026.0	1042.2	1051.2	1042.2	1026.0	995.5	952.5	904.1
127.5°	947.8	1000.2	1039.7	1067.3	1083.1	1090.3	1083.1	1067.3	1039.7	1000.2	947.8
130°	972.2	1026.0	1065.5	1096.0	1110.3	1117.5	1110.3	1096.0	1065.5	1026.0	972.2
132.5°	990.9	1047.6	1088.5	1116.1	1131.9	1139.0	1131.9	1116.1	1088.5	1047.6	990.9
135°	1013.5	1072.7	1115.7	1142.6	1157.0	1164.2	1157.0	1142.6	1115.7	1072.7	1013.5
137.5°	1033.2	1087.0	1131.9	1160.2	1173.1	1177.8	1173.1	1160.2	1131.9	1087.0	1033.2
140°	1047.6	1094.2	1139.0	1166.0	1180.3	1182.1	1180.3	1166.0	1139.0	1094.2	1047.6
142.5°	1066.2	1102.8	1141.9	1168.8	1183.2	1186.4	1183.2	1168.8	1141.9	1102.8	1066.2
145°	1099.6	1121.1	1148.0	1173.1	1185.7	1189.3	1185.7	1173.1	1148.0	1121.1	1099.6
147.5°	1141.6	1148.4	1162.4	1178.9	1191.1	1193.6	1191.1	1178.9	1162.4	1148.4	1141.6
150°	1173.1	1171.3	1176.7	1187.5	1198.2	1196.5	1198.2	1187.5	1176.7	1171.3	1173.1
152.5°	1209.0	1198.6	1198.2	1203.3	1208.3	1207.9	1208.3	1203.3	1198.2	1198.6	1209.0
155°	1270.0	1250.3	1239.5	1235.9	1235.9	1234.1	1235.9	1235.9	1239.5	1250.3	1270.0
157.5°	1337.1	1309.5	1293.3	1284.7	1282.2	1278.2	1282.2	1284.7	1293.3	1309.5	1337.1
160°	1383.0	1352.5	1336.4	1322.0	1316.6	1311.3	1316.6	1322.0	1336.4	1352.5	1383.0
162.5°	1426.1	1397.0	1379.4	1366.5	1361.1	1352.9	1361.1	1366.5	1379.4	1397.0	1426.1
165°	1496.0	1465.5	1445.8	1435.0	1427.8	1420.7	1427.8	1435.0	1445.8	1465.5	1496.0
167.5°	1566.0	1532.6	1519.7	1507.5	1500.7	1487.8	1500.7	1507.5	1519.7	1532.6	1566.0
170°	1609.0	1578.5	1571.4	1560.6	1548.0	1533.7	1548.0	1560.6	1571.4	1578.5	1609.0
172.5°	1646.3	1625.9	1618.7	1607.9	1604.0	1592.5	1604.0	1607.9	1618.7	1625.9	1646.3
175°	1700.5	1684.4	1684.4	1682.6	1677.2	1666.4	1677.2	1682.6	1684.4	1684.4	1700.5
177.5°	1745.7	1737.1	1742.8	1742.8	1741.4	1731.4	1741.4	1742.8	1742.8	1737.1	1745.7
180°	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1427629

CATALOG NUMBER: SQ2W-BBN-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	3946.6	3946.6	3946.6	3946.6
2.5°	3918.1	3931.1	3937.7	3944.3
5°	3770.6	3781.7	3790.9	3800.0
7.5°	3480.0	3487.6	3484.7	3481.7
10°	3228.0	3228.4	3226.2	3224.0
12.5°	2932.7	2942.8	2934.0	2925.2
15°	2462.7	2482.9	2468.6	2454.4
17.5°	1997.5	2010.0	2011.4	2012.9
20°	1708.1	1718.9	1721.1	1723.3
22.5°	1463.3	1467.7	1471.5	1475.2
25°	1144.8	1154.5	1166.5	1178.5
27.5°	939.9	945.5	945.7	945.9
30°	827.4	833.4	835.6	837.8
32.5°	738.4	744.8	743.2	741.7
35°	611.4	616.6	616.6	616.6
37.5°	495.7	499.6	500.1	500.7
40°	420.8	423.6	425.2	426.7
42.5°	349.7	351.0	346.8	342.5
45°	243.0	236.7	219.0	201.3
47.5°	141.8	125.4	106.0	86.5
50°	90.6	70.2	55.0	39.8
52.5°	57.6	38.5	30.9	23.3
55°	25.4	15.0	12.5	10.0
57.5°	10.2	6.5	5.1	3.7
60°	4.5	2.7	2.1	1.4
62.5°	2.0	1.0	0.7	0.3
65°	0.2	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0
87.5°	6.5	3.9	2.5	1.1
90°	32.3	19.7	12.6	5.4
92.5°	69.6	48.4	34.1	19.7
95°	139.9	111.2	78.9	55.6
97.5°	222.8	176.5	144.6	106.2
100°	267.3	222.4	191.9	150.7
102.5°	316.1	278.4	236.4	195.2
105°	403.6	357.0	308.5	261.9
107.5°	484.7	433.4	375.3	333.3
110°	536.3	480.7	419.7	382.1



TEST NUMBER: P1427629

CATALOG NUMBER: SQ2W-BBN-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	586.6	529.5	467.1	429.4
115°	654.7	591.9	534.5	502.3
117.5°	720.4	655.8	595.2	569.7
120°	760.6	696.0	636.8	617.1
122.5°	793.6	730.4	675.5	667.3
125°	843.1	778.5	731.9	742.6
127.5°	883.3	824.1	794.6	818.7
130°	907.7	855.6	837.7	871.8
132.5°	929.2	888.6	880.7	927.7
135°	961.5	938.1	945.3	1009.9
137.5°	999.9	990.9	1014.9	1096.4
140°	1024.2	1029.6	1063.7	1155.2
142.5°	1057.3	1069.8	1113.9	1211.2
145°	1108.6	1135.5	1192.9	1289.7
147.5°	1166.7	1201.5	1272.5	1371.9
150°	1205.4	1250.3	1325.6	1420.7
152.5°	1249.9	1296.2	1371.5	1468.0
155°	1318.4	1370.4	1449.4	1531.9
157.5°	1388.4	1441.5	1516.8	1588.9
160°	1431.4	1488.8	1557.0	1623.4
162.5°	1480.2	1533.3	1592.9	1652.1
165°	1551.6	1594.7	1643.1	1693.3
167.5°	1611.5	1647.4	1685.4	1724.5
170°	1650.3	1679.0	1711.3	1741.8
172.5°	1683.3	1706.2	1729.9	1756.1
175°	1727.4	1740.0	1754.3	1770.5
177.5°	1761.5	1765.8	1770.1	1777.3
180°	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1427629
 CATALOG NUMBER: SQ2W-BBN-K-125U-050D-L940-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00