

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427800

Luminaire Tested: SQ2W-F-K-150U-050D-L940-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1427800
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-20)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-F-K-150U-050D-L940-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8338.5 lumens
Efficiency: N/A
Efficacy: 114.4 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.25 / 1.36
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 72.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427800

CATALOG NUMBER: SQ2W-F-K-150U-050D-L940-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

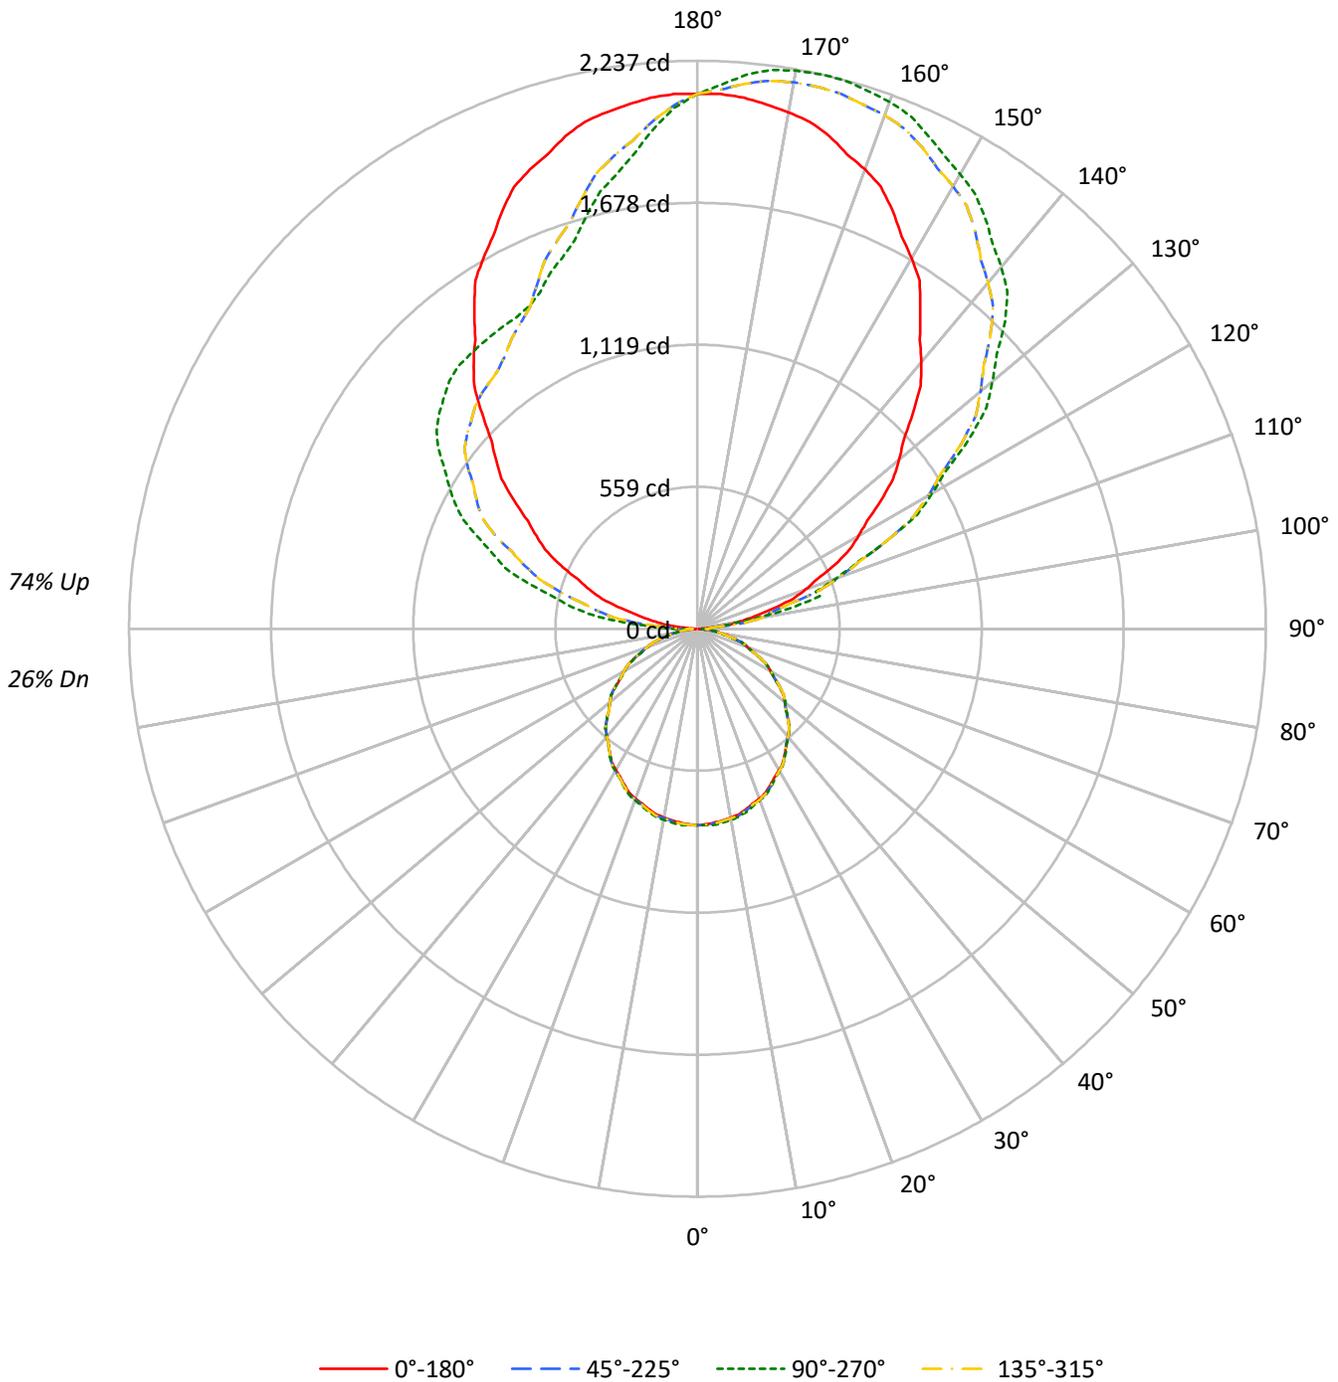



TEST NUMBER: P1427800

CATALOG NUMBER: SQ2W-F-K-150U-050D-L940-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	101	101	101	101	91	91	91	91	70	70	70	51	51	51	34	34	34	26				26
1	92	88	84	81	82	79	76	73	61	59	57	45	44	42	30	29	29	22				22
2	84	77	71	66	75	69	64	59	53	50	47	39	37	35	26	25	24	18				18
3	76	67	60	55	68	60	54	49	47	43	39	35	32	30	23	22	20	15				15
4	70	59	52	46	62	53	47	42	42	37	33	31	28	25	21	19	17	13				13
5	64	53	45	39	57	47	41	36	37	32	29	27	24	22	19	17	15	11				11
6	59	47	39	34	52	42	36	31	33	28	25	25	21	19	17	15	13	10				10
7	54	42	35	29	48	38	31	27	30	25	22	22	19	17	15	13	12	9				9
8	50	38	31	26	45	34	28	23	27	22	19	20	17	15	14	12	10	8				8
9	47	35	28	23	41	31	25	21	25	20	17	19	15	13	13	11	9	7				7
10	43	32	25	20	39	29	23	18	23	18	15	17	14	12	12	10	8	6				6

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	12503	12503	12503	12503
5°	12428	12569	12428	12569
10°	12383	12527	12383	12527
15°	12316	12471	12316	12471
20°	12239	12359	12239	12359
25°	12105	12212	12105	12212
30°	11976	12058	11976	12058
35°	11824	11899	11824	11899
40°	11689	11725	11689	11725
45°	11519	11519	11519	11519
50°	11288	11316	11288	11316
55°	11023	11037	11023	11037
60°	10724	10724	10724	10724
65°	10376	10334	10376	10334
70°	9885	9781	9885	9781
75°	9220	9014	9220	9014
80°	8210	7810	8210	7810
85°	6558	5557	6558	5557

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°
 Vertical Angle: 45°
 Luminance: 11597 cd/sqm



TEST NUMBER: P1427800

CATALOG NUMBER: SQ2W-F-K-150U-050D-L940-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.3	0.9
10°-20°	209.4	2.5
20°-30°	315.2	3.8
30°-40°	376.9	4.5
40°-50°	389.2	4.7
50°-60°	351.0	4.2
60°-70°	268.9	3.2
70°-80°	155.4	1.9
80°-90°	49.1	0.6
90°-100°	167.6	2.0
100°-110°	488.9	5.9
110°-120°	797.8	9.6
120°-130°	1012.4	12.1
130°-140°	1083.3	13.0
140°-150°	1011.5	12.1
150°-160°	832.4	10.0
160°-170°	558.2	6.7
170°-180°	198.2	2.4
0°-30°	597.8	7.2
0°-40°	974.7	11.7
0°-60°	1714.9	20.6
0°-90°	2188.2	26.2
90°-120°	1454.3	17.4
90°-150°	4561.5	54.7
90°-180°	6150.0	73.8
0°-180°	8338.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	774	774	774	774	774	
5°	767	776	767	776	767	73
15°	737	746	737	746	737	208
25°	680	686	680	686	680	313
35°	600	604	600	604	600	375
45°	504	504	504	504	504	389
55°	392	392	392	392	392	350
65°	272	270	272	270	272	268
75°	148	144	148	144	148	156
85°	35	30	35	30	35	41
90°	6	47	6	92	6	7
95°	66	49	66	287	66	80
105°	311	498	311	685	311	330
115°	596	826	596	1017	596	587
125°	881	1308	881	1247	881	788
135°	1198	1713	1198	1381	1198	926
145°	1530	1974	1530	1411	1530	957
155°	1817	2145	1817	1464	1817	835
165°	2008	2236	2008	1685	2008	565
175°	2100	2189	2100	1977	2100	199
180°	2106	2106	2106	2106	2106	



TEST NUMBER: P1427800

CATALOG NUMBER: SQ2W-F-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	774.4	774.4	774.4	774.4	774.4	774.4	774.4	774.4	774.4	774.4	774.4
2.5°	770.5	774.2	777.9	776.3	773.0	771.8	772.5	773.2	773.6	774.0	773.6
5°	766.8	771.6	776.5	774.8	770.9	769.2	769.7	770.7	773.1	775.5	773.1
7.5°	760.6	765.4	770.3	768.7	765.0	763.5	764.1	765.1	767.6	770.2	767.6
10°	755.3	760.2	765.0	763.3	759.5	758.0	759.0	760.2	762.1	764.1	762.1
12.5°	748.8	753.6	758.5	757.1	753.6	752.1	752.7	753.7	755.8	758.0	755.8
15°	736.8	741.6	746.5	745.2	741.8	740.4	741.2	742.2	744.1	746.1	744.1
17.5°	722.3	726.8	731.4	730.2	727.0	725.9	726.7	727.7	729.4	731.1	729.4
20°	712.3	716.6	721.0	719.7	716.6	715.1	715.3	715.9	717.6	719.3	717.6
22.5°	700.0	704.4	708.8	707.6	704.7	702.9	702.4	702.5	704.6	706.7	704.6
25°	679.5	683.9	688.3	687.3	684.7	683.0	682.3	682.1	683.8	685.5	683.8
27.5°	658.1	661.8	665.4	664.7	662.4	661.1	660.6	660.5	661.7	662.9	661.7
30°	642.4	646.1	649.7	648.8	646.4	644.9	644.4	644.4	645.6	646.8	645.6
32.5°	625.9	629.3	632.7	631.5	628.7	627.2	627.1	627.4	628.8	630.2	628.8
35°	599.9	602.8	605.7	604.4	601.8	600.6	600.8	601.3	602.5	603.7	602.5
37.5°	573.8	576.1	578.3	577.0	574.5	573.3	573.2	573.4	574.5	575.5	574.5
40°	554.6	557.1	559.5	558.1	555.4	554.0	553.7	553.9	555.1	556.3	555.1
42.5°	535.0	536.8	538.7	537.4	535.2	534.1	534.2	534.5	535.1	535.8	535.1
45°	504.5	506.2	507.9	506.6	504.5	503.4	503.4	503.5	504.0	504.5	504.0
47.5°	472.5	473.8	475.1	474.2	472.5	471.5	471.2	471.2	471.9	472.7	471.9
50°	449.4	451.1	452.8	451.9	450.2	449.1	448.7	448.5	449.5	450.5	449.5
52.5°	426.7	428.6	430.5	429.7	428.0	426.8	426.1	425.8	426.6	427.4	426.6
55°	391.6	393.8	395.9	395.4	393.9	392.7	391.8	391.1	391.6	392.1	391.6
57.5°	355.7	357.8	360.0	359.5	358.3	357.1	355.9	355.2	355.9	356.6	355.9
60°	332.1	334.1	336.0	335.4	333.9	332.7	331.8	331.2	331.6	332.1	331.6
62.5°	308.1	310.1	312.0	311.3	309.6	308.3	307.3	306.7	307.2	307.7	307.2
65°	271.6	273.3	275.0	274.3	272.9	271.7	270.7	270.0	270.3	270.5	270.3
67.5°	234.7	236.2	237.6	236.9	235.5	234.1	232.7	231.8	232.2	232.5	232.2
70°	209.4	210.9	212.3	211.8	210.6	209.4	208.1	207.2	207.2	207.2	207.2
72.5°	185.0	186.2	187.5	186.8	185.4	184.2	183.1	182.4	182.4	182.4	182.4
75°	147.8	148.5	149.2	148.9	148.2	147.2	146.0	145.0	144.8	144.5	144.8
77.5°	111.9	111.9	111.9	111.2	110.3	109.4	108.5	107.7	107.4	107.1	107.4
80°	88.3	88.3	88.3	87.8	87.1	86.3	85.6	85.0	84.5	84.0	84.5
82.5°	66.5	66.1	65.8	65.1	64.4	63.5	62.4	61.6	62.1	62.6	62.1
85°	35.4	35.0	34.5	33.8	33.1	32.2	31.3	30.5	30.2	30.0	30.2
87.5°	12.2	13.5	15.2	16.4	17.1	16.8	16.1	15.9	16.1	15.9	16.1
90°	6.4	14.9	25.5	34.0	40.4	42.6	42.6	44.7	46.8	46.8	46.8
92.5°	23.4	37.0	37.4	37.4	45.5	49.4	52.8	53.2	55.3	55.3	55.3
95°	66.0	72.3	108.5	106.4	72.3	57.4	48.9	48.9	48.9	48.9	48.9
97.5°	126.0	135.3	141.3	189.4	200.0	193.2	157.4	132.3	118.3	111.9	118.3
100°	178.7	183.0	195.7	197.9	251.1	302.1	276.6	244.7	234.0	227.7	234.0
102.5°	231.5	234.0	253.6	262.6	274.9	303.8	392.3	382.6	375.3	374.0	375.3
105°	310.6	312.8	348.9	366.0	374.5	374.5	372.3	414.9	483.0	497.9	483.0
107.5°	395.3	405.1	447.7	493.2	503.0	505.5	494.5	488.1	485.5	487.2	485.5
110°	453.2	468.1	519.2	576.6	591.5	595.8	591.5	585.1	580.9	580.9	580.9



TEST NUMBER: P1427800

CATALOG NUMBER: SQ2W-F-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	509.4	531.1	588.9	654.9	680.0	692.8	683.4	678.7	674.5	677.9	674.5
115°	595.8	627.7	704.3	772.3	823.4	829.8	827.7	827.7	825.5	825.5	825.5
117.5°	675.8	726.8	812.8	891.9	951.1	968.1	976.6	974.1	971.5	975.8	971.5
120°	731.9	791.5	889.4	978.7	1036.2	1061.7	1070.2	1066.0	1070.2	1066.0	1070.2
122.5°	791.5	864.7	960.9	1053.6	1121.3	1150.2	1160.4	1161.3	1162.1	1159.6	1162.1
125°	880.9	970.2	1083.0	1178.7	1248.9	1283.0	1291.5	1293.6	1297.9	1308.5	1297.9
127.5°	971.1	1072.4	1196.2	1288.5	1360.4	1401.7	1414.9	1419.6	1428.5	1433.2	1428.5
130°	1034.1	1148.9	1274.5	1361.7	1431.9	1476.6	1500.0	1506.4	1517.0	1514.9	1517.0
132.5°	1100.4	1220.4	1347.7	1438.3	1503.4	1551.5	1571.5	1589.8	1593.6	1596.6	1593.6
135°	1197.9	1327.7	1455.3	1544.7	1606.4	1653.2	1678.7	1695.8	1706.4	1712.8	1706.4
137.5°	1300.4	1437.5	1560.0	1639.6	1701.7	1742.1	1771.1	1789.0	1800.0	1805.1	1800.0
140°	1370.2	1502.1	1621.3	1704.3	1759.6	1800.0	1825.5	1846.8	1859.6	1859.6	1859.6
142.5°	1436.6	1566.8	1682.6	1765.5	1814.1	1851.1	1878.3	1894.5	1909.0	1909.0	1909.0
145°	1529.8	1659.6	1766.0	1849.0	1889.4	1923.4	1953.2	1966.0	1974.5	1974.5	1974.5
147.5°	1627.2	1742.1	1839.2	1918.7	1952.8	1992.8	2016.2	2026.4	2037.0	2032.4	2037.0
150°	1685.1	1791.5	1885.1	1959.6	1993.6	2031.9	2055.3	2063.8	2074.5	2068.1	2074.5
152.5°	1741.3	1842.6	1927.7	1997.0	2026.0	2064.3	2091.1	2099.6	2106.8	2102.1	2106.8
155°	1817.0	1906.4	1985.1	2049.0	2074.5	2110.7	2136.2	2146.8	2155.3	2144.7	2155.3
157.5°	1884.7	1961.7	2030.2	2089.0	2116.2	2147.3	2171.1	2184.3	2192.8	2188.1	2192.8
160°	1925.6	1995.8	2057.5	2112.8	2138.3	2166.0	2191.5	2206.4	2214.9	2208.5	2214.9
162.5°	1959.6	2023.0	2081.3	2131.5	2153.6	2177.9	2208.5	2221.7	2230.2	2222.1	2230.2
165°	2008.5	2059.6	2110.7	2153.2	2172.4	2191.5	2223.4	2238.3	2244.7	2236.2	2244.7
167.5°	2045.6	2084.7	2126.0	2162.6	2176.6	2195.3	2227.3	2239.6	2247.7	2237.0	2247.7
170°	2066.0	2100.0	2136.2	2166.0	2176.6	2193.6	2225.6	2236.2	2242.6	2231.9	2242.6
172.5°	2083.0	2108.5	2137.9	2164.3	2169.8	2183.4	2213.6	2224.3	2229.0	2220.0	2229.0
175°	2100.0	2114.9	2136.2	2153.2	2151.1	2159.6	2185.1	2193.6	2202.1	2189.4	2202.1
177.5°	2108.1	2114.9	2121.7	2131.9	2125.1	2125.1	2143.9	2149.0	2150.7	2143.9	2150.7
180°	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4



TEST NUMBER: P1427800

CATALOG NUMBER: SQ2W-F-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	774.4	774.4	774.4	774.4	774.4	774.4	774.4	774.4	774.4	774.4	774.4
2.5°	773.2	772.5	771.8	773.0	776.3	777.9	774.2	770.5	774.2	777.9	776.3
5°	770.7	769.7	769.2	770.9	774.8	776.5	771.6	766.8	771.6	776.5	774.8
7.5°	765.1	764.1	763.5	765.0	768.7	770.3	765.4	760.6	765.4	770.3	768.7
10°	760.2	759.0	758.0	759.5	763.3	765.0	760.2	755.3	760.2	765.0	763.3
12.5°	753.7	752.7	752.1	753.6	757.1	758.5	753.6	748.8	753.6	758.5	757.1
15°	742.2	741.2	740.4	741.8	745.2	746.5	741.6	736.8	741.6	746.5	745.2
17.5°	727.7	726.7	725.9	727.0	730.2	731.4	726.8	722.3	726.8	731.4	730.2
20°	715.9	715.3	715.1	716.6	719.7	721.0	716.6	712.3	716.6	721.0	719.7
22.5°	702.5	702.4	702.9	704.7	707.6	708.8	704.4	700.0	704.4	708.8	707.6
25°	682.1	682.3	683.0	684.7	687.3	688.3	683.9	679.5	683.9	688.3	687.3
27.5°	660.5	660.6	661.1	662.4	664.7	665.4	661.8	658.1	661.8	665.4	664.7
30°	644.4	644.4	644.9	646.4	648.8	649.7	646.1	642.4	646.1	649.7	648.8
32.5°	627.4	627.1	627.2	628.7	631.5	632.7	629.3	625.9	629.3	632.7	631.5
35°	601.3	600.8	600.6	601.8	604.4	605.7	602.8	599.9	602.8	605.7	604.4
37.5°	573.4	573.2	573.3	574.5	577.0	578.3	576.1	573.8	576.1	578.3	577.0
40°	553.9	553.7	554.0	555.4	558.1	559.5	557.1	554.6	557.1	559.5	558.1
42.5°	534.5	534.2	534.1	535.2	537.4	538.7	536.8	535.0	536.8	538.7	537.4
45°	503.5	503.4	503.4	504.5	506.6	507.9	506.2	504.5	506.2	507.9	506.6
47.5°	471.2	471.2	471.5	472.5	474.2	475.1	473.8	472.5	473.8	475.1	474.2
50°	448.5	448.7	449.1	450.2	451.9	452.8	451.1	449.4	451.1	452.8	451.9
52.5°	425.8	426.1	426.8	428.0	429.7	430.5	428.6	426.7	428.6	430.5	429.7
55°	391.1	391.8	392.7	393.9	395.4	395.9	393.8	391.6	393.8	395.9	395.4
57.5°	355.2	355.9	357.1	358.3	359.5	360.0	357.8	355.7	357.8	360.0	359.5
60°	331.2	331.8	332.7	333.9	335.4	336.0	334.1	332.1	334.1	336.0	335.4
62.5°	306.7	307.3	308.3	309.6	311.3	312.0	310.1	308.1	310.1	312.0	311.3
65°	270.0	270.7	271.7	272.9	274.3	275.0	273.3	271.6	273.3	275.0	274.3
67.5°	231.8	232.7	234.1	235.5	236.9	237.6	236.2	234.7	236.2	237.6	236.9
70°	207.2	208.1	209.4	210.6	211.8	212.3	210.9	209.4	210.9	212.3	211.8
72.5°	182.4	183.1	184.2	185.4	186.8	187.5	186.2	185.0	186.2	187.5	186.8
75°	145.0	146.0	147.2	148.2	148.9	149.2	148.5	147.8	148.5	149.2	148.9
77.5°	107.7	108.5	109.4	110.3	111.2	111.9	111.9	111.9	111.9	111.9	111.2
80°	85.0	85.6	86.3	87.1	87.8	88.3	88.3	88.3	88.3	88.3	87.8
82.5°	61.6	62.4	63.5	64.4	65.1	65.8	66.1	66.5	66.1	65.8	65.1
85°	30.5	31.3	32.2	33.1	33.8	34.5	35.0	35.4	35.0	34.5	33.8
87.5°	15.9	16.1	16.8	17.1	16.4	15.2	13.5	12.2	13.5	14.8	17.3
90°	44.7	42.6	42.6	40.4	34.0	25.5	14.9	6.4	14.9	23.4	38.3
92.5°	53.2	52.8	49.4	45.5	37.4	37.4	37.0	23.4	40.4	57.4	82.6
95°	48.9	48.9	57.4	72.3	106.4	108.5	72.3	66.0	93.6	131.9	166.0
97.5°	132.3	157.4	193.2	200.0	189.4	141.3	135.3	126.0	171.5	209.4	264.3
100°	244.7	276.6	302.1	251.1	197.9	195.7	183.0	178.7	227.7	263.8	317.0
102.5°	382.6	392.3	303.8	274.9	262.6	253.6	234.0	231.5	280.4	330.2	374.9
105°	414.9	372.3	374.5	374.5	366.0	348.9	312.8	310.6	366.0	423.4	478.7
107.5°	488.1	494.5	505.5	503.0	493.2	447.7	405.1	395.3	445.1	514.0	574.9
110°	585.1	591.5	595.8	591.5	576.6	519.2	468.1	453.2	497.9	570.2	636.2



TEST NUMBER: P1427800

CATALOG NUMBER: SQ2W-F-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	678.7	683.4	692.8	680.0	654.9	588.9	531.1	509.4	554.0	628.1	695.8
115°	827.7	827.7	829.8	823.4	772.3	704.3	627.7	595.8	634.0	702.1	776.6
117.5°	974.1	976.6	968.1	951.1	891.9	812.8	726.8	675.8	706.0	777.9	854.5
120°	1066.0	1070.2	1061.7	1036.2	978.7	889.4	791.5	731.9	755.3	825.5	902.1
122.5°	1161.3	1160.4	1150.2	1121.3	1053.6	960.9	864.7	791.5	801.3	866.4	941.3
125°	1293.6	1291.5	1283.0	1248.9	1178.7	1083.0	970.2	880.9	868.1	923.4	1000.0
127.5°	1419.6	1414.9	1401.7	1360.4	1288.5	1196.2	1072.4	971.1	942.6	977.5	1047.7
130°	1506.4	1500.0	1476.6	1431.9	1361.7	1274.5	1148.9	1034.1	993.6	1014.9	1076.6
132.5°	1589.8	1571.5	1551.5	1503.4	1438.3	1347.7	1220.4	1100.4	1044.7	1054.1	1102.1
135°	1695.8	1678.7	1653.2	1606.4	1544.7	1455.3	1327.7	1197.9	1121.3	1112.8	1140.4
137.5°	1789.0	1771.1	1742.1	1701.7	1639.6	1560.0	1437.5	1300.4	1203.8	1175.3	1186.0
140°	1846.8	1825.5	1800.0	1759.6	1704.3	1621.3	1502.1	1370.2	1261.7	1221.3	1214.9
142.5°	1894.5	1878.3	1851.1	1814.1	1765.5	1682.6	1566.8	1436.6	1321.3	1268.9	1254.1
145°	1966.0	1953.2	1923.4	1889.4	1849.0	1766.0	1659.6	1529.8	1414.9	1346.8	1314.9
147.5°	2026.4	2016.2	1992.8	1952.8	1918.7	1839.2	1742.1	1627.2	1509.4	1425.1	1383.8
150°	2063.8	2055.3	2031.9	1993.6	1959.6	1885.1	1791.5	1685.1	1572.4	1483.0	1429.8
152.5°	2099.6	2091.1	2064.3	2026.0	1997.0	1927.7	1842.6	1741.3	1626.8	1537.5	1482.6
155°	2146.8	2136.2	2110.7	2074.5	2049.0	1985.1	1906.4	1817.0	1719.2	1625.5	1563.8
157.5°	2184.3	2171.1	2147.3	2116.2	2089.0	2030.2	1961.7	1884.7	1799.2	1709.8	1646.8
160°	2206.4	2191.5	2166.0	2138.3	2112.8	2057.5	1995.8	1925.6	1846.8	1766.0	1697.9
162.5°	2221.7	2208.5	2177.9	2153.6	2131.5	2081.3	2023.0	1959.6	1889.4	1818.7	1755.8
165°	2238.3	2223.4	2191.5	2172.4	2153.2	2110.7	2059.6	2008.5	1949.0	1891.5	1840.4
167.5°	2239.6	2227.3	2195.3	2176.6	2162.6	2126.0	2084.7	2045.6	1999.2	1954.1	1911.5
170°	2236.2	2225.6	2193.6	2176.6	2166.0	2136.2	2100.0	2066.0	2029.8	1991.5	1957.5
172.5°	2224.3	2213.6	2183.4	2169.8	2164.3	2137.9	2108.5	2083.0	2051.9	2023.8	1996.6
175°	2193.6	2185.1	2159.6	2151.1	2153.2	2136.2	2114.9	2100.0	2080.9	2063.8	2049.0
177.5°	2149.0	2143.9	2125.1	2125.1	2131.9	2121.7	2114.9	2108.1	2099.6	2094.5	2089.4
180°	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4



TEST NUMBER: P1427800

CATALOG NUMBER: SQ2W-F-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	774.4	774.4	774.4	774.4	774.4	774.4	774.4	774.4	774.4	774.4	774.4
2.5°	773.0	771.8	772.5	773.2	773.6	774.0	773.6	773.2	772.5	771.8	773.0
5°	770.9	769.2	769.7	770.7	773.1	775.5	773.1	770.7	769.7	769.2	770.9
7.5°	765.0	763.5	764.1	765.1	767.6	770.2	767.6	765.1	764.1	763.5	765.0
10°	759.5	758.0	759.0	760.2	762.1	764.1	762.1	760.2	759.0	758.0	759.5
12.5°	753.6	752.1	752.7	753.7	755.8	758.0	755.8	753.7	752.7	752.1	753.6
15°	741.8	740.4	741.2	742.2	744.1	746.1	744.1	742.2	741.2	740.4	741.8
17.5°	727.0	725.9	726.7	727.7	729.4	731.1	729.4	727.7	726.7	725.9	727.0
20°	716.6	715.1	715.3	715.9	717.6	719.3	717.6	715.9	715.3	715.1	716.6
22.5°	704.7	702.9	702.4	702.5	704.6	706.7	704.6	702.5	702.4	702.9	704.7
25°	684.7	683.0	682.3	682.1	683.8	685.5	683.8	682.1	682.3	683.0	684.7
27.5°	662.4	661.1	660.6	660.5	661.7	662.9	661.7	660.5	660.6	661.1	662.4
30°	646.4	644.9	644.4	644.4	645.6	646.8	645.6	644.4	644.4	644.9	646.4
32.5°	628.7	627.2	627.1	627.4	628.8	630.2	628.8	627.4	627.1	627.2	628.7
35°	601.8	600.6	600.8	601.3	602.5	603.7	602.5	601.3	600.8	600.6	601.8
37.5°	574.5	573.3	573.2	573.4	574.5	575.5	574.5	573.4	573.2	573.3	574.5
40°	555.4	554.0	553.7	553.9	555.1	556.3	555.1	553.9	553.7	554.0	555.4
42.5°	535.2	534.1	534.2	534.5	535.1	535.8	535.1	534.5	534.2	534.1	535.2
45°	504.5	503.4	503.4	503.5	504.0	504.5	504.0	503.5	503.4	503.4	504.5
47.5°	472.5	471.5	471.2	471.2	471.9	472.7	471.9	471.2	471.2	471.5	472.5
50°	450.2	449.1	448.7	448.5	449.5	450.5	449.5	448.5	448.7	449.1	450.2
52.5°	428.0	426.8	426.1	425.8	426.6	427.4	426.6	425.8	426.1	426.8	428.0
55°	393.9	392.7	391.8	391.1	391.6	392.1	391.6	391.1	391.8	392.7	393.9
57.5°	358.3	357.1	355.9	355.2	355.9	356.6	355.9	355.2	355.9	357.1	358.3
60°	333.9	332.7	331.8	331.2	331.6	332.1	331.6	331.2	331.8	332.7	333.9
62.5°	309.6	308.3	307.3	306.7	307.2	307.7	307.2	306.7	307.3	308.3	309.6
65°	272.9	271.7	270.7	270.0	270.3	270.5	270.3	270.0	270.7	271.7	272.9
67.5°	235.5	234.1	232.7	231.8	232.2	232.5	232.2	231.8	232.7	234.1	235.5
70°	210.6	209.4	208.1	207.2	207.2	207.2	207.2	207.2	208.1	209.4	210.6
72.5°	185.4	184.2	183.1	182.4	182.4	182.4	182.4	182.4	183.1	184.2	185.4
75°	148.2	147.2	146.0	145.0	144.8	144.5	144.8	145.0	146.0	147.2	148.2
77.5°	110.3	109.4	108.5	107.7	107.4	107.1	107.4	107.7	108.5	109.4	110.3
80°	87.1	86.3	85.6	85.0	84.5	84.0	84.5	85.0	85.6	86.3	87.1
82.5°	64.4	63.5	62.4	61.6	62.1	62.6	62.1	61.6	62.4	63.5	64.4
85°	33.1	32.2	31.3	30.5	30.2	30.0	30.2	30.5	31.3	32.2	33.1
87.5°	18.8	21.1	23.3	24.4	25.9	24.8	25.9	24.4	23.3	21.1	18.8
90°	48.9	63.8	78.7	87.2	95.7	91.5	95.7	87.2	78.7	63.8	48.9
92.5°	98.3	123.4	141.7	157.0	163.8	163.0	163.8	157.0	141.7	123.4	98.3
95°	197.9	227.7	257.4	278.7	291.5	287.2	291.5	278.7	257.4	227.7	197.9
97.5°	305.1	345.1	378.3	398.3	411.1	419.6	411.1	398.3	378.3	345.1	305.1
100°	376.6	414.9	453.2	476.6	497.9	506.4	497.9	476.6	453.2	414.9	376.6
102.5°	434.5	484.7	526.4	551.5	569.4	577.9	569.4	551.5	526.4	484.7	434.5
105°	529.8	583.0	627.7	659.6	678.7	685.1	678.7	659.6	627.7	583.0	529.8
107.5°	625.1	680.0	721.3	756.6	780.0	793.6	780.0	756.6	721.3	680.0	625.1
110°	700.0	744.7	789.4	821.3	844.7	853.2	844.7	821.3	789.4	744.7	700.0



TEST NUMBER: P1427800

CATALOG NUMBER: SQ2W-F-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	763.0	812.8	857.5	889.4	916.2	928.1	916.2	889.4	857.5	812.8	763.0
115°	851.1	917.0	957.5	987.2	1006.4	1017.0	1006.4	987.2	957.5	917.0	851.1
117.5°	924.3	993.2	1037.5	1060.4	1069.4	1077.0	1069.4	1060.4	1037.5	993.2	924.3
120°	970.2	1034.1	1085.1	1114.9	1125.5	1129.8	1125.5	1114.9	1085.1	1034.1	970.2
122.5°	1012.8	1073.2	1122.6	1159.2	1176.6	1180.9	1176.6	1159.2	1122.6	1073.2	1012.8
125°	1072.4	1129.8	1180.9	1217.0	1236.2	1246.8	1236.2	1217.0	1180.9	1129.8	1072.4
127.5°	1124.3	1186.4	1233.2	1266.0	1284.7	1293.2	1284.7	1266.0	1233.2	1186.4	1124.3
130°	1153.2	1217.0	1263.8	1300.0	1317.0	1325.5	1317.0	1300.0	1263.8	1217.0	1153.2
132.5°	1175.3	1242.6	1291.1	1323.8	1342.6	1351.1	1342.6	1323.8	1291.1	1242.6	1175.3
135°	1202.1	1272.4	1323.4	1355.3	1372.4	1380.9	1372.4	1355.3	1323.4	1272.4	1202.1
137.5°	1225.5	1289.4	1342.6	1376.2	1391.5	1397.0	1391.5	1376.2	1342.6	1289.4	1225.5
140°	1242.6	1297.9	1351.1	1383.0	1400.0	1402.1	1400.0	1383.0	1351.1	1297.9	1242.6
142.5°	1264.7	1308.1	1354.5	1386.4	1403.4	1407.2	1403.4	1386.4	1354.5	1308.1	1264.7
145°	1304.3	1329.8	1361.7	1391.5	1406.4	1410.7	1406.4	1391.5	1361.7	1329.8	1304.3
147.5°	1354.1	1362.1	1378.7	1398.3	1412.8	1415.8	1412.8	1398.3	1378.7	1362.1	1354.1
150°	1391.5	1389.4	1395.8	1408.5	1421.3	1419.2	1421.3	1408.5	1395.8	1389.4	1391.5
152.5°	1434.1	1421.7	1421.3	1427.2	1433.2	1432.8	1433.2	1427.2	1421.3	1421.7	1434.1
155°	1506.4	1483.0	1470.2	1466.0	1466.0	1463.8	1466.0	1466.0	1470.2	1483.0	1506.4
157.5°	1586.0	1553.2	1534.1	1523.8	1520.9	1516.2	1520.9	1523.8	1534.1	1553.2	1586.0
160°	1640.4	1604.3	1585.1	1568.1	1561.7	1555.3	1561.7	1568.1	1585.1	1604.3	1640.4
162.5°	1691.5	1657.0	1636.2	1620.9	1614.5	1604.7	1614.5	1620.9	1636.2	1657.0	1691.5
165°	1774.5	1738.3	1714.9	1702.1	1693.6	1685.1	1693.6	1702.1	1714.9	1738.3	1774.5
167.5°	1857.5	1817.9	1802.6	1788.1	1780.0	1764.7	1780.0	1788.1	1802.6	1817.9	1857.5
170°	1908.5	1872.4	1863.8	1851.1	1836.2	1819.2	1836.2	1851.1	1863.8	1872.4	1908.5
172.5°	1952.8	1928.5	1920.0	1907.3	1902.6	1889.0	1902.6	1907.3	1920.0	1928.5	1952.8
175°	2017.0	1997.9	1997.9	1995.8	1989.4	1976.6	1989.4	1995.8	1997.9	1997.9	2017.0
177.5°	2070.7	2060.4	2067.3	2067.3	2065.6	2053.6	2065.6	2067.3	2067.3	2060.4	2070.7
180°	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4



TEST NUMBER: P1427800

CATALOG NUMBER: SQ2W-F-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	774.4	774.4	774.4	774.4
2.5°	776.3	777.9	774.2	770.5
5°	774.8	776.5	771.6	766.8
7.5°	768.7	770.3	765.4	760.6
10°	763.3	765.0	760.2	755.3
12.5°	757.1	758.5	753.6	748.8
15°	745.2	746.5	741.6	736.8
17.5°	730.2	731.4	726.8	722.3
20°	719.7	721.0	716.6	712.3
22.5°	707.6	708.8	704.4	700.0
25°	687.3	688.3	683.9	679.5
27.5°	664.7	665.4	661.8	658.1
30°	648.8	649.7	646.1	642.4
32.5°	631.5	632.7	629.3	625.9
35°	604.4	605.7	602.8	599.9
37.5°	577.0	578.3	576.1	573.8
40°	558.1	559.5	557.1	554.6
42.5°	537.4	538.7	536.8	535.0
45°	506.6	507.9	506.2	504.5
47.5°	474.2	475.1	473.8	472.5
50°	451.9	452.8	451.1	449.4
52.5°	429.7	430.5	428.6	426.7
55°	395.4	395.9	393.8	391.6
57.5°	359.5	360.0	357.8	355.7
60°	335.4	336.0	334.1	332.1
62.5°	311.3	312.0	310.1	308.1
65°	274.3	275.0	273.3	271.6
67.5°	236.9	237.6	236.2	234.7
70°	211.8	212.3	210.9	209.4
72.5°	186.8	187.5	186.2	185.0
75°	148.9	149.2	148.5	147.8
77.5°	111.2	111.9	111.9	111.9
80°	87.8	88.3	88.3	88.3
82.5°	65.1	65.8	66.1	66.5
85°	33.8	34.5	35.0	35.4
87.5°	17.3	14.8	13.5	12.2
90°	38.3	23.4	14.9	6.4
92.5°	82.6	57.4	40.4	23.4
95°	166.0	131.9	93.6	66.0
97.5°	264.3	209.4	171.5	126.0
100°	317.0	263.8	227.7	178.7
102.5°	374.9	330.2	280.4	231.5
105°	478.7	423.4	366.0	310.6
107.5°	574.9	514.0	445.1	395.3
110°	636.2	570.2	497.9	453.2



TEST NUMBER: P1427800

CATALOG NUMBER: SQ2W-F-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	695.8	628.1	554.0	509.4
115°	776.6	702.1	634.0	595.8
117.5°	854.5	777.9	706.0	675.8
120°	902.1	825.5	755.3	731.9
122.5°	941.3	866.4	801.3	791.5
125°	1000.0	923.4	868.1	880.9
127.5°	1047.7	977.5	942.6	971.1
130°	1076.6	1014.9	993.6	1034.1
132.5°	1102.1	1054.1	1044.7	1100.4
135°	1140.4	1112.8	1121.3	1197.9
137.5°	1186.0	1175.3	1203.8	1300.4
140°	1214.9	1221.3	1261.7	1370.2
142.5°	1254.1	1268.9	1321.3	1436.6
145°	1314.9	1346.8	1414.9	1529.8
147.5°	1383.8	1425.1	1509.4	1627.2
150°	1429.8	1483.0	1572.4	1685.1
152.5°	1482.6	1537.5	1626.8	1741.3
155°	1563.8	1625.5	1719.2	1817.0
157.5°	1646.8	1709.8	1799.2	1884.7
160°	1697.9	1766.0	1846.8	1925.6
162.5°	1755.8	1818.7	1889.4	1959.6
165°	1840.4	1891.5	1949.0	2008.5
167.5°	1911.5	1954.1	1999.2	2045.6
170°	1957.5	1991.5	2029.8	2066.0
172.5°	1996.6	2023.8	2051.9	2083.0
175°	2049.0	2063.8	2080.9	2100.0
177.5°	2089.4	2094.5	2099.6	2108.1
180°	2106.4	2106.4	2106.4	2106.4



TEST NUMBER: P1427800
 CATALOG NUMBER: SQ2W-F-K-150U-050D-L940-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.88	14.57	15.02	15.70	17.27	13.80	14.49	14.94	15.61	17.19
	3H	15.66	16.28	16.81	17.41	19.00	15.56	16.17	16.70	17.31	18.90
	4H	16.35	16.93	17.50	18.07	19.66	16.23	16.82	17.39	17.96	19.55
	6H	16.78	17.31	17.94	18.45	20.06	16.64	17.17	17.80	18.31	19.92
	8H	16.93	17.44	18.09	18.60	20.20	16.78	17.29	17.94	18.44	20.04
	12H	17.01	17.50	18.18	18.64	20.26	16.83	17.32	18.00	18.47	20.09
4H	2H	14.44	15.03	15.60	16.16	17.76	14.38	14.96	15.54	16.10	17.69
	3H	16.45	16.94	17.61	18.10	19.71	16.35	16.84	17.52	18.01	19.61
	4H	17.25	17.70	18.42	18.85	20.48	17.14	17.59	18.31	18.74	20.37
	6H	17.80	18.18	18.97	19.36	20.97	17.66	18.04	18.83	19.21	20.83
	8H	18.01	18.37	19.18	19.53	21.16	17.85	18.21	19.02	19.37	21.00
	12H	18.11	18.44	19.30	19.61	21.25	17.93	18.25	19.11	19.43	21.07
8H	4H	17.48	17.84	18.66	19.01	20.64	17.39	17.75	18.56	18.91	20.54
	6H	18.17	18.46	19.36	19.67	21.30	18.04	18.33	19.23	19.54	21.17
	8H	18.47	18.73	19.67	19.91	21.56	18.31	18.57	19.51	19.76	21.41
	12H	18.64	18.87	19.84	20.05	21.73	18.45	18.68	19.65	19.86	21.54
12H	4H	17.47	17.80	18.66	18.97	20.61	17.38	17.70	18.57	18.88	20.52
	6H	18.21	18.47	19.41	19.66	21.31	18.09	18.35	19.29	19.53	21.18
	8H	18.54	18.77	19.74	19.95	21.63	18.39	18.62	19.59	19.80	21.48