

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1435840

Luminaire Tested: SQ2W-FA-K-125U-050D-L940-UNV-STD-W-WM-4

Issue Date: 3/24/2026

Test Information

Test Method: LM-79-2019
Report Number: P1435840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2502-345-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/24/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-FA-K-125U-050D-L940-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS ASYMMETRIC ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7237.3 lumens
Efficiency: N/A
Efficacy: 117.1 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.23 / 1.34
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 61.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1435840

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L940-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

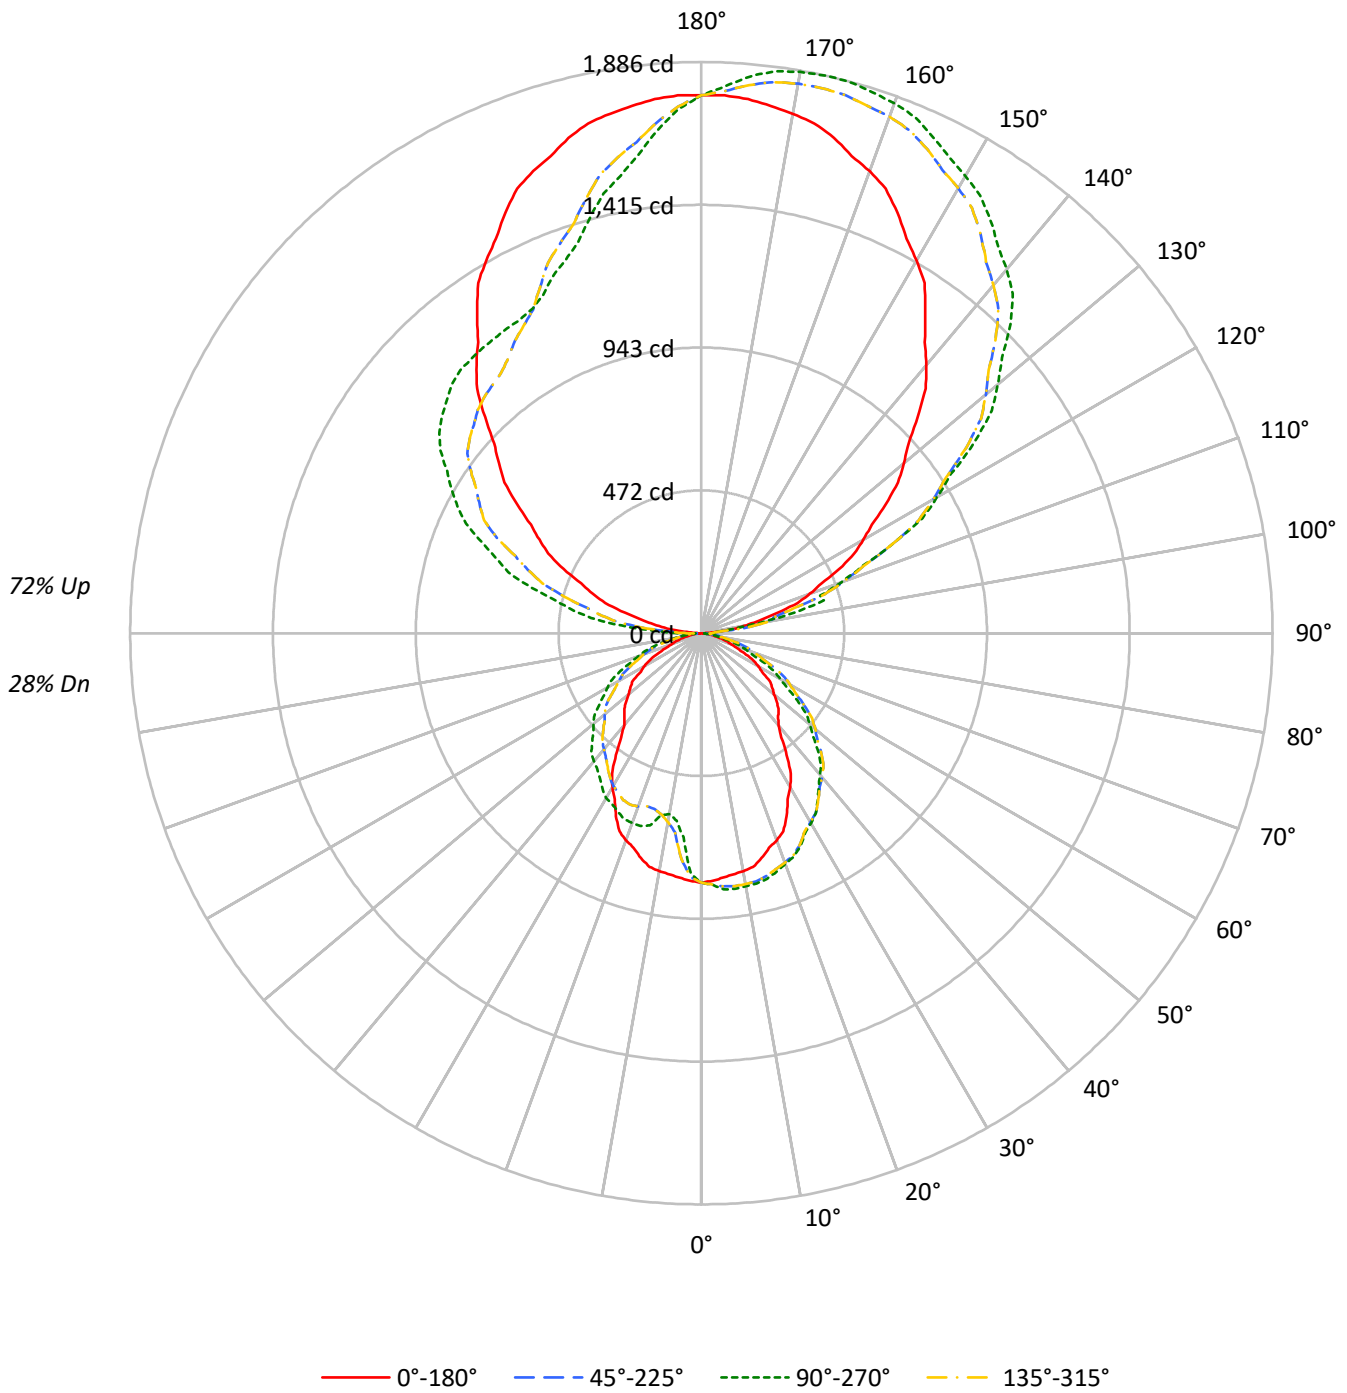



TEST NUMBER: P1435840

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L940-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	28				
1	93	89	85	82	83	80	77	74	62	60	58	47	45	44	32	31	31	24				
2	85	78	72	67	76	70	65	60	55	51	48	41	39	37	28	27	26	20				
3	77	68	61	55	69	61	55	50	48	44	41	36	33	31	25	23	22	17				
4	71	60	53	47	63	54	48	43	43	38	34	32	29	27	22	20	19	15				
5	65	53	46	40	58	48	41	36	38	33	30	29	25	23	20	18	16	13				
6	59	48	40	34	53	43	36	31	34	29	26	26	23	20	18	16	14	11				
7	55	43	35	30	49	39	32	27	31	26	22	23	20	18	17	14	13	10				
8	51	39	31	26	45	35	29	24	28	23	20	21	18	16	15	13	11	9				
9	47	35	28	23	42	32	26	21	26	21	18	20	16	14	14	12	10	8				
10	44	32	25	21	39	29	23	19	23	19	16	18	15	12	13	11	9	7				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13294	13294	13294	13294
5°	13138	13758	13138	10966
10°	13081	13917	13081	9942
15°	12856	14029	12856	10989
20°	12501	13928	12501	11460
25°	11882	13815	11882	11597
30°	10947	13507	10947	11721
35°	9688	13210	9688	11511
40°	8340	12848	8340	11636
45°	8234	12387	8234	11659
50°	7857	11783	7857	11702
55°	7817	10871	7817	11589
60°	7007	9687	7007	11541
65°	5975	8535	5975	11217
70°	4820	7232	4820	10395
75°	4180	5970	4180	9557
80°	3561	4454	3561	7717
85°	2371	2371	2371	4724

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 12777 cd/sqm



TEST NUMBER: P1435840

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L940-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	74.1	1.0
10°-20°	207.0	2.9
20°-30°	314.4	4.3
30°-40°	369.1	5.1
40°-50°	374.6	5.2
50°-60°	328.1	4.5
60°-70°	232.7	3.2
70°-80°	119.8	1.7
80°-90°	32.5	0.4
90°-100°	141.3	2.0
100°-110°	412.2	5.7
110°-120°	672.6	9.3
120°-130°	853.5	11.8
130°-140°	913.3	12.6
140°-150°	852.8	11.8
150°-160°	701.7	9.7
160°-170°	470.6	6.5
170°-180°	167.1	2.3
0°-30°	595.5	8.2
0°-40°	964.6	13.3
0°-60°	1667.2	23.0
0°-90°	2052.2	28.4
90°-120°	1226.1	16.9
90°-150°	3845.7	53.1
90°-180°	5185.0	71.6
0°-180°	7237.3	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	823	823	823	823	823	
5°	811	849	811	677	811	77
15°	769	839	769	657	769	216
25°	667	776	667	651	667	304
35°	492	670	492	584	492	306
45°	361	542	361	511	361	276
55°	278	386	278	412	278	240
65°	156	223	156	294	156	156
75°	67	96	67	153	67	72
85°	13	13	13	26	13	16
90°	5	40	5	77	5	5
95°	56	41	56	242	56	67
105°	262	420	262	578	262	279
115°	502	696	502	857	502	495
125°	743	1103	743	1051	743	664
135°	1010	1444	1010	1164	1010	780
145°	1290	1665	1290	1189	1290	807
155°	1532	1808	1532	1234	1532	704
165°	1693	1885	1693	1421	1693	477
175°	1770	1846	1770	1666	1770	168
180°	1776	1776	1776	1776	1776	



TEST NUMBER: P1435840

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	823.4	823.4	823.4	823.4	823.4	823.4	823.4	823.4	823.4	823.4	823.4
2.5°	818.3	824.0	829.6	831.0	831.0	831.0	831.0	831.0	831.0	831.0	831.0
5°	810.6	820.5	830.5	835.1	837.9	840.1	841.5	843.2	846.1	848.9	846.1
7.5°	803.0	816.3	829.6	836.1	840.4	843.8	846.4	848.6	850.1	851.5	850.1
10°	797.9	813.5	829.1	836.1	840.4	843.2	844.7	846.1	847.5	848.9	847.5
12.5°	790.2	806.9	823.7	831.9	837.3	840.7	842.1	843.5	844.9	846.4	844.9
15°	769.1	791.8	814.5	823.4	827.6	831.2	834.0	836.5	837.9	839.3	837.9
17.5°	743.0	770.5	798.0	809.1	814.8	818.9	821.5	823.7	824.8	825.9	824.8
20°	727.6	757.4	787.2	798.9	804.6	808.1	809.6	810.6	810.6	810.6	810.6
22.5°	707.2	740.4	773.6	786.2	791.8	794.8	795.1	795.6	796.7	797.9	796.7
25°	667.0	705.3	743.6	759.6	768.1	771.6	770.2	769.8	772.7	775.5	772.7
27.5°	617.9	666.1	714.3	730.6	736.3	739.8	741.3	742.3	742.3	742.3	742.3
30°	587.2	641.1	695.0	712.7	718.4	722.0	723.4	724.5	724.5	724.5	724.5
32.5°	548.9	613.0	677.1	696.6	701.1	703.5	703.8	704.0	704.0	704.0	704.0
35°	491.5	569.5	647.5	669.1	672.0	673.4	673.4	673.0	671.6	670.2	671.6
37.5°	434.0	522.5	611.0	636.4	640.6	641.8	639.8	637.9	636.5	635.1	636.5
40°	395.7	492.2	588.6	615.9	620.2	620.2	615.9	612.4	611.0	609.6	611.0
42.5°	375.3	470.6	565.9	593.0	597.2	596.7	591.3	586.9	585.4	584.0	585.4
45°	360.6	445.7	530.8	555.3	559.6	558.9	553.2	548.2	545.4	542.5	545.4
47.5°	338.3	413.2	488.1	512.1	519.2	518.5	510.0	502.9	500.1	497.2	500.1
50°	312.8	386.5	460.3	484.0	491.1	490.4	481.9	474.8	472.0	469.1	472.0
52.5°	294.9	364.1	433.3	455.1	461.1	459.2	449.6	441.6	438.8	435.9	438.8
55°	277.7	335.8	394.0	411.7	415.9	413.1	403.2	394.7	390.4	386.2	390.4
57.5°	237.4	292.8	348.1	365.3	369.8	366.4	355.1	345.4	340.6	335.7	340.6
60°	217.0	266.7	316.3	333.0	338.6	335.8	324.5	314.2	307.1	300.0	307.1
62.5°	194.0	238.0	282.0	298.9	306.9	305.2	293.8	283.5	276.4	269.4	276.4
65°	156.4	194.7	233.0	250.0	259.9	259.2	247.9	237.6	230.5	223.4	230.5
67.5°	122.6	155.5	188.4	205.1	216.4	215.9	203.4	192.6	186.9	181.3	186.9
70°	102.1	130.5	158.9	174.5	185.8	185.8	174.5	164.5	158.9	153.2	158.9
72.5°	89.4	110.9	132.5	147.2	159.7	159.7	147.2	136.7	132.2	127.7	132.2
75°	67.0	79.8	92.6	106.4	120.6	122.0	110.6	101.4	98.6	95.7	98.6
77.5°	48.5	54.5	60.4	71.3	83.8	85.2	75.5	68.0	66.9	65.7	66.9
80°	38.3	39.7	41.1	50.0	61.3	62.8	54.3	47.9	47.9	47.9	47.9
82.5°	25.5	26.9	28.4	34.7	42.6	43.5	37.2	32.3	31.1	30.0	31.1
85°	12.8	12.8	12.8	14.9	17.7	17.7	14.9	12.8	12.8	12.8	12.8
87.5°	3.6	5.1	6.9	9.1	11.4	11.7	10.6	10.1	10.4	10.4	10.4
90°	5.4	12.6	21.5	28.7	34.1	35.9	35.9	37.7	39.5	39.5	39.5
92.5°	19.7	31.2	31.6	31.6	38.4	41.6	44.5	44.8	46.6	46.6	46.6
95°	55.6	61.0	91.5	89.7	61.0	48.4	41.3	41.3	41.3	41.3	41.3
97.5°	106.2	114.1	119.1	159.6	168.6	162.9	132.7	111.6	99.7	94.4	99.7
100°	150.7	154.3	165.0	166.8	211.7	254.7	233.2	206.3	197.3	191.9	197.3
102.5°	195.2	197.3	213.8	221.4	231.8	256.2	330.8	322.5	316.4	315.3	316.4
105°	261.9	263.7	294.2	308.5	315.7	315.7	313.9	349.8	407.2	419.7	407.2
107.5°	333.3	341.5	377.4	415.8	424.0	426.2	416.9	411.5	409.3	410.8	409.3
110°	382.1	394.6	437.7	486.1	498.7	502.3	498.7	493.3	489.7	489.7	489.7

TEST NUMBER: P1435840

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	429.4	447.7	496.5	552.1	573.3	584.1	576.2	572.2	568.6	571.5	568.6
115°	502.3	529.2	593.7	651.1	694.2	699.6	697.8	697.8	696.0	696.0	696.0
117.5°	569.7	612.8	685.2	752.0	801.8	816.2	823.3	821.2	819.0	822.6	819.0
120°	617.1	667.3	749.8	825.1	873.6	895.1	902.3	898.7	902.3	898.7	902.3
122.5°	667.3	729.0	810.1	888.3	945.3	969.7	978.3	979.0	979.8	977.6	979.8
125°	742.6	818.0	913.0	993.8	1052.9	1081.6	1088.8	1090.6	1094.2	1103.2	1094.2
127.5°	818.7	904.1	1008.5	1086.3	1146.9	1181.7	1192.9	1196.8	1204.3	1208.3	1204.3
130°	871.8	968.6	1074.5	1148.0	1207.2	1244.9	1264.6	1270.0	1279.0	1277.2	1279.0
132.5°	927.7	1028.9	1136.2	1212.6	1267.5	1308.0	1324.9	1340.3	1343.5	1346.1	1343.5
135°	1009.9	1119.3	1226.9	1302.3	1354.3	1393.8	1415.3	1429.6	1438.6	1444.0	1438.6
137.5°	1096.4	1211.9	1315.2	1382.3	1434.7	1468.7	1493.1	1508.2	1517.5	1521.8	1517.5
140°	1155.2	1266.4	1366.9	1436.8	1483.5	1517.5	1539.1	1557.0	1567.8	1567.8	1567.8
142.5°	1211.2	1320.9	1418.5	1488.5	1529.4	1560.6	1583.5	1597.2	1609.4	1609.4	1609.4
145°	1289.7	1399.1	1488.8	1558.8	1592.9	1621.6	1646.7	1657.5	1664.6	1664.6	1664.6
147.5°	1371.9	1468.7	1550.5	1617.6	1646.3	1680.1	1699.8	1708.4	1717.4	1713.4	1717.4
150°	1420.7	1510.4	1589.3	1652.1	1680.8	1713.1	1732.8	1740.0	1748.9	1743.6	1748.9
152.5°	1468.0	1553.4	1625.2	1683.6	1708.0	1740.3	1762.9	1770.1	1776.2	1772.3	1776.2
155°	1531.9	1607.2	1673.6	1727.4	1748.9	1779.4	1801.0	1809.9	1817.1	1808.1	1817.1
157.5°	1588.9	1653.9	1711.6	1761.1	1784.1	1810.3	1830.4	1841.5	1848.7	1844.7	1848.7
160°	1623.4	1682.6	1734.6	1781.2	1802.7	1826.1	1847.6	1860.1	1867.3	1861.9	1867.3
162.5°	1652.1	1705.5	1754.7	1797.0	1815.7	1836.1	1861.9	1873.1	1880.2	1873.4	1880.2
165°	1693.3	1736.4	1779.4	1815.3	1831.4	1847.6	1874.5	1887.1	1892.4	1885.3	1892.4
167.5°	1724.5	1757.5	1792.3	1823.2	1835.0	1850.8	1877.7	1888.1	1894.9	1886.0	1894.9
170°	1741.8	1770.5	1801.0	1826.1	1835.0	1849.4	1876.3	1885.3	1890.6	1881.7	1890.6
172.5°	1756.1	1777.6	1802.4	1824.6	1829.3	1840.8	1866.2	1875.2	1879.2	1871.6	1879.2
175°	1770.5	1783.0	1801.0	1815.3	1813.5	1820.7	1842.2	1849.4	1856.6	1845.8	1856.6
177.5°	1777.3	1783.0	1788.8	1797.4	1791.6	1791.6	1807.4	1811.7	1813.2	1807.4	1813.2
180°	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1435840

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	823.4	823.4	823.4	823.4	823.4	823.4	823.4	823.4	823.4	823.4	823.4
2.5°	831.0	831.0	831.0	831.0	831.0	829.6	824.0	818.3	818.3	818.3	814.0
5°	843.2	841.5	840.1	837.9	835.1	830.5	820.5	810.6	806.4	802.1	784.0
7.5°	848.6	846.4	843.8	840.4	836.1	829.6	816.3	803.0	784.0	764.9	724.7
10°	846.1	844.7	843.2	840.4	836.1	829.1	813.5	797.9	759.6	721.3	683.0
12.5°	843.5	842.1	840.7	837.3	831.9	823.7	806.9	790.2	736.0	681.8	647.2
15°	836.5	834.0	831.2	827.6	823.4	814.5	791.8	769.1	708.1	647.1	618.1
17.5°	823.7	821.5	818.9	814.8	809.1	798.0	770.5	743.0	679.1	615.3	596.6
20°	810.6	809.6	808.1	804.6	798.9	787.2	757.4	727.6	663.8	600.0	591.5
22.5°	795.6	795.1	794.8	791.8	786.2	773.6	740.4	707.2	644.5	581.8	582.1
25°	769.8	770.2	771.6	768.1	759.6	743.6	705.3	667.0	611.7	556.4	565.9
27.5°	742.3	741.3	739.8	736.3	730.6	714.3	666.1	617.9	574.2	530.5	546.4
30°	724.5	723.4	722.0	718.4	712.7	695.0	641.1	587.2	550.3	513.5	531.9
32.5°	704.0	703.8	703.5	701.1	696.6	677.1	613.0	548.9	522.3	495.6	514.9
35°	673.0	673.4	673.4	672.0	669.1	647.5	569.5	491.5	480.1	468.8	491.5
37.5°	637.9	639.8	641.8	640.6	636.4	611.0	522.5	434.0	437.7	441.4	468.9
40°	612.4	615.9	620.2	620.2	615.9	588.6	492.2	395.7	408.5	421.3	451.1
42.5°	586.9	591.3	596.7	597.2	593.0	565.9	470.6	375.3	389.2	403.1	434.0
45°	548.2	553.2	558.9	559.6	555.3	530.8	445.7	360.6	369.1	377.7	407.4
47.5°	502.9	510.0	518.5	519.2	512.1	488.1	413.2	338.3	344.5	350.8	381.3
50°	474.8	481.9	490.4	491.1	484.0	460.3	386.5	312.8	321.3	329.8	361.7
52.5°	441.6	449.6	459.2	461.1	455.1	433.3	364.1	294.9	300.0	305.1	339.6
55°	394.7	403.2	413.1	415.9	411.7	394.0	335.8	277.7	273.4	269.1	304.2
57.5°	345.4	355.1	366.4	369.8	365.3	348.1	292.8	237.4	233.8	230.1	268.1
60°	314.2	324.5	335.8	338.6	333.0	316.3	266.7	217.0	209.9	202.8	242.5
62.5°	283.5	293.8	305.2	306.9	298.9	282.0	238.0	194.0	189.2	184.4	223.0
65°	237.6	247.9	259.2	259.9	250.0	233.0	194.7	156.4	159.2	162.1	196.8
67.5°	192.6	203.4	215.9	216.4	205.1	188.4	155.5	122.6	131.9	141.3	172.5
70°	164.5	174.5	185.8	185.8	174.5	158.9	130.5	102.1	114.9	127.7	156.4
72.5°	136.7	147.2	159.7	159.7	147.2	132.5	110.9	89.4	102.1	114.9	138.5
75°	101.4	110.6	122.0	120.6	106.4	92.6	79.8	67.0	79.8	92.6	110.6
77.5°	68.0	75.5	85.2	83.8	71.3	60.4	54.5	48.5	59.0	69.5	82.1
80°	47.9	54.3	62.8	61.3	50.0	41.1	39.7	38.3	45.4	52.5	61.7
82.5°	32.3	37.2	43.5	42.6	34.7	28.4	26.9	25.5	31.5	37.4	43.8
85°	12.8	14.9	17.7	17.7	14.9	12.8	12.8	12.8	15.6	18.4	21.3
87.5°	10.1	10.6	11.7	11.4	9.1	6.9	5.1	3.6	6.2	8.8	11.6
90°	37.7	35.9	35.9	34.1	28.7	21.5	12.6	5.4	12.6	19.7	32.3
92.5°	44.8	44.5	41.6	38.4	31.6	31.6	31.2	19.7	34.1	48.4	69.6
95°	41.3	41.3	48.4	61.0	89.7	91.5	61.0	55.6	78.9	111.2	139.9
97.5°	111.6	132.7	162.9	168.6	159.6	119.1	114.1	106.2	144.6	176.5	222.8
100°	206.3	233.2	254.7	211.7	166.8	165.0	154.3	150.7	191.9	222.4	267.3
102.5°	322.5	330.8	256.2	231.8	221.4	213.8	197.3	195.2	236.4	278.4	316.1
105°	349.8	313.9	315.7	315.7	308.5	294.2	263.7	261.9	308.5	357.0	403.6
107.5°	411.5	416.9	426.2	424.0	415.8	377.4	341.5	333.3	375.3	433.4	484.7
110°	493.3	498.7	502.3	498.7	486.1	437.7	394.6	382.1	419.7	480.7	536.3



TEST NUMBER: P1435840

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	572.2	576.2	584.1	573.3	552.1	496.5	447.7	429.4	467.1	529.5	586.6
115°	697.8	697.8	699.6	694.2	651.1	593.7	529.2	502.3	534.5	591.9	654.7
117.5°	821.2	823.3	816.2	801.8	752.0	685.2	612.8	569.7	595.2	655.8	720.4
120°	898.7	902.3	895.1	873.6	825.1	749.8	667.3	617.1	636.8	696.0	760.6
122.5°	979.0	978.3	969.7	945.3	888.3	810.1	729.0	667.3	675.5	730.4	793.6
125°	1090.6	1088.8	1081.6	1052.9	993.8	913.0	818.0	742.6	731.9	778.5	843.1
127.5°	1196.8	1192.9	1181.7	1146.9	1086.3	1008.5	904.1	818.7	794.6	824.1	883.3
130°	1270.0	1264.6	1244.9	1207.2	1148.0	1074.5	968.6	871.8	837.7	855.6	907.7
132.5°	1340.3	1324.9	1308.0	1267.5	1212.6	1136.2	1028.9	927.7	880.7	888.6	929.2
135°	1429.6	1415.3	1393.8	1354.3	1302.3	1226.9	1119.3	1009.9	945.3	938.1	961.5
137.5°	1508.2	1493.1	1468.7	1434.7	1382.3	1315.2	1211.9	1096.4	1014.9	990.9	999.9
140°	1557.0	1539.1	1517.5	1483.5	1436.8	1366.9	1266.4	1155.2	1063.7	1029.6	1024.2
142.5°	1597.2	1583.5	1560.6	1529.4	1488.5	1418.5	1320.9	1211.2	1113.9	1069.8	1057.3
145°	1657.5	1646.7	1621.6	1592.9	1558.8	1488.8	1399.1	1289.7	1192.9	1135.5	1108.6
147.5°	1708.4	1699.8	1680.1	1646.3	1617.6	1550.5	1468.7	1371.9	1272.5	1201.5	1166.7
150°	1740.0	1732.8	1713.1	1680.8	1652.1	1589.3	1510.4	1420.7	1325.6	1250.3	1205.4
152.5°	1770.1	1762.9	1740.3	1708.0	1683.6	1625.2	1553.4	1468.0	1371.5	1296.2	1249.9
155°	1809.9	1801.0	1779.4	1748.9	1727.4	1673.6	1607.2	1531.9	1449.4	1370.4	1318.4
157.5°	1841.5	1830.4	1810.3	1784.1	1761.1	1711.6	1653.9	1588.9	1516.8	1441.5	1388.4
160°	1860.1	1847.6	1826.1	1802.7	1781.2	1734.6	1682.6	1623.4	1557.0	1488.8	1431.4
162.5°	1873.1	1861.9	1836.1	1815.7	1797.0	1754.7	1705.5	1652.1	1592.9	1533.3	1480.2
165°	1887.1	1874.5	1847.6	1831.4	1815.3	1779.4	1736.4	1693.3	1643.1	1594.7	1551.6
167.5°	1888.1	1877.7	1850.8	1835.0	1823.2	1792.3	1757.5	1724.5	1685.4	1647.4	1611.5
170°	1885.3	1876.3	1849.4	1835.0	1826.1	1801.0	1770.5	1741.8	1711.3	1679.0	1650.3
172.5°	1875.2	1866.2	1840.8	1829.3	1824.6	1802.4	1777.6	1756.1	1729.9	1706.2	1683.3
175°	1849.4	1842.2	1820.7	1813.5	1815.3	1801.0	1783.0	1770.5	1754.3	1740.0	1727.4
177.5°	1811.7	1807.4	1791.6	1791.6	1797.4	1788.8	1783.0	1777.3	1770.1	1765.8	1761.5
180°	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1435840

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	823.4	823.4	823.4	823.4	823.4	823.4	823.4	823.4	823.4	823.4	823.4
2.5°	808.3	803.8	800.4	797.6	796.4	795.3	796.4	797.6	800.4	803.8	808.3
5°	761.3	737.2	711.7	690.8	683.7	676.6	683.7	690.8	711.7	737.2	761.3
7.5°	677.3	648.2	637.4	628.8	626.5	624.2	626.5	628.8	637.4	648.2	677.3
10°	644.7	621.3	612.8	606.4	606.4	606.4	606.4	606.4	612.8	621.3	644.7
12.5°	619.1	604.8	604.2	605.2	610.9	616.6	610.9	605.2	604.2	604.8	619.1
15°	599.6	601.8	624.5	643.2	650.3	657.4	650.3	643.2	624.5	601.8	599.6
17.5°	592.9	605.1	633.2	655.7	661.3	667.0	661.3	655.7	633.2	605.1	592.9
20°	601.4	617.0	638.3	655.7	661.3	667.0	661.3	655.7	638.3	617.0	601.4
22.5°	603.4	622.4	639.1	653.1	658.8	664.5	658.8	653.1	639.1	622.4	603.4
25°	597.1	619.8	634.0	645.4	648.2	651.0	648.2	645.4	634.0	619.8	597.1
27.5°	582.1	607.1	621.3	632.4	634.4	636.4	634.4	632.4	621.3	607.1	582.1
30°	568.8	594.3	608.5	620.2	624.5	628.7	624.5	620.2	608.5	594.3	568.8
32.5°	549.5	575.6	593.2	606.6	607.4	608.3	607.4	606.6	593.2	575.6	549.5
35°	525.5	552.5	572.3	586.9	585.4	584.0	585.4	586.9	572.3	552.5	525.5
37.5°	504.4	530.8	548.1	561.5	563.2	564.9	563.2	561.5	548.1	530.8	504.4
40°	486.5	513.5	531.9	546.4	549.3	552.1	549.3	546.4	531.9	513.5	486.5
42.5°	470.6	498.1	516.6	531.1	534.0	536.8	534.0	531.1	516.6	498.1	470.6
45°	444.3	472.7	492.5	507.8	509.2	510.6	509.2	507.8	492.5	472.7	444.3
47.5°	419.8	448.4	466.8	481.0	482.4	483.8	482.4	481.0	466.8	448.4	419.8
50°	401.4	430.5	448.9	463.1	464.5	465.9	464.5	463.1	448.9	430.5	401.4
52.5°	383.8	414.0	430.2	442.7	444.1	445.5	444.1	442.7	430.2	414.0	383.8
55°	352.5	384.4	400.0	411.7	411.7	411.7	411.7	411.7	400.0	384.4	352.5
57.5°	320.0	352.8	366.4	377.0	378.7	380.4	378.7	377.0	366.4	352.8	320.0
60°	297.9	331.2	342.5	351.8	354.6	357.4	354.6	351.8	342.5	331.2	297.9
62.5°	276.0	308.2	319.6	328.5	330.2	331.9	330.2	328.5	319.6	308.2	276.0
65°	242.2	270.6	281.9	290.8	292.2	293.6	292.2	290.8	281.9	270.6	242.2
67.5°	211.1	234.4	242.3	248.6	249.7	250.8	249.7	248.6	242.3	234.4	211.1
70°	190.4	210.3	216.0	220.2	220.2	220.2	220.2	220.2	216.0	210.3	190.4
72.5°	165.7	182.2	187.9	192.4	193.5	194.7	193.5	192.4	187.9	182.2	165.7
75°	130.5	142.5	146.8	150.4	151.8	153.2	151.8	150.4	146.8	142.5	130.5
77.5°	95.5	103.4	106.0	108.2	109.6	111.1	109.6	108.2	106.0	103.4	95.5
80°	71.6	77.3	78.7	80.1	81.6	83.0	81.6	80.1	78.7	77.3	71.6
82.5°	50.4	54.3	55.7	56.9	57.2	57.4	57.2	56.9	55.7	54.3	50.4
85°	24.1	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	25.5	24.1
87.5°	13.4	15.9	18.4	19.8	21.3	20.5	21.3	19.8	18.4	15.9	13.4
90°	41.3	53.8	66.4	73.5	80.7	77.1	80.7	73.5	66.4	53.8	41.3
92.5°	82.9	104.0	119.5	132.4	138.1	137.4	138.1	132.4	119.5	104.0	82.9
95°	166.8	191.9	217.0	235.0	245.7	242.2	245.7	235.0	217.0	191.9	166.8
97.5°	257.2	291.0	318.9	335.8	346.6	353.7	346.6	335.8	318.9	291.0	257.2
100°	317.5	349.8	382.1	401.8	419.7	426.9	419.7	401.8	382.1	349.8	317.5
102.5°	366.3	408.6	443.8	464.9	480.0	487.2	480.0	464.9	443.8	408.6	366.3
105°	446.7	491.5	529.2	556.1	572.2	577.6	572.2	556.1	529.2	491.5	446.7
107.5°	527.0	573.3	608.1	637.9	657.6	669.1	657.6	637.9	608.1	573.3	527.0
110°	590.2	627.8	665.5	692.4	712.1	719.3	712.1	692.4	665.5	627.8	590.2



TEST NUMBER: P1435840

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	643.2	685.2	722.9	749.8	772.4	782.4	772.4	749.8	722.9	685.2	643.2
115°	717.5	773.1	807.2	832.3	848.5	857.4	848.5	832.3	807.2	773.1	717.5
117.5°	779.2	837.3	874.6	894.0	901.6	908.0	901.6	894.0	874.6	837.3	779.2
120°	818.0	871.8	914.8	939.9	948.9	952.5	948.9	939.9	914.8	871.8	818.0
122.5°	853.8	904.8	946.4	977.3	992.0	995.5	992.0	977.3	946.4	904.8	853.8
125°	904.1	952.5	995.5	1026.0	1042.2	1051.2	1042.2	1026.0	995.5	952.5	904.1
127.5°	947.8	1000.2	1039.7	1067.3	1083.1	1090.3	1083.1	1067.3	1039.7	1000.2	947.8
130°	972.2	1026.0	1065.5	1096.0	1110.3	1117.5	1110.3	1096.0	1065.5	1026.0	972.2
132.5°	990.9	1047.6	1088.5	1116.1	1131.9	1139.0	1131.9	1116.1	1088.5	1047.6	990.9
135°	1013.5	1072.7	1115.7	1142.6	1157.0	1164.2	1157.0	1142.6	1115.7	1072.7	1013.5
137.5°	1033.2	1087.0	1131.9	1160.2	1173.1	1177.8	1173.1	1160.2	1131.9	1087.0	1033.2
140°	1047.6	1094.2	1139.0	1166.0	1180.3	1182.1	1180.3	1166.0	1139.0	1094.2	1047.6
142.5°	1066.2	1102.8	1141.9	1168.8	1183.2	1186.4	1183.2	1168.8	1141.9	1102.8	1066.2
145°	1099.6	1121.1	1148.0	1173.1	1185.7	1189.3	1185.7	1173.1	1148.0	1121.1	1099.6
147.5°	1141.6	1148.4	1162.4	1178.9	1191.1	1193.6	1191.1	1178.9	1162.4	1148.4	1141.6
150°	1173.1	1171.3	1176.7	1187.5	1198.2	1196.5	1198.2	1187.5	1176.7	1171.3	1173.1
152.5°	1209.0	1198.6	1198.2	1203.3	1208.3	1207.9	1208.3	1203.3	1198.2	1198.6	1209.0
155°	1270.0	1250.3	1239.5	1235.9	1235.9	1234.1	1235.9	1235.9	1239.5	1250.3	1270.0
157.5°	1337.1	1309.5	1293.3	1284.7	1282.2	1278.2	1282.2	1284.7	1293.3	1309.5	1337.1
160°	1383.0	1352.5	1336.4	1322.0	1316.6	1311.3	1316.6	1322.0	1336.4	1352.5	1383.0
162.5°	1426.1	1397.0	1379.4	1366.5	1361.1	1352.9	1361.1	1366.5	1379.4	1397.0	1426.1
165°	1496.0	1465.5	1445.8	1435.0	1427.8	1420.7	1427.8	1435.0	1445.8	1465.5	1496.0
167.5°	1566.0	1532.6	1519.7	1507.5	1500.7	1487.8	1500.7	1507.5	1519.7	1532.6	1566.0
170°	1609.0	1578.5	1571.4	1560.6	1548.0	1533.7	1548.0	1560.6	1571.4	1578.5	1609.0
172.5°	1646.3	1625.9	1618.7	1607.9	1604.0	1592.5	1604.0	1607.9	1618.7	1625.9	1646.3
175°	1700.5	1684.4	1684.4	1682.6	1677.2	1666.4	1677.2	1682.6	1684.4	1684.4	1700.5
177.5°	1745.7	1737.1	1742.8	1742.8	1741.4	1731.4	1741.4	1742.8	1742.8	1737.1	1745.7
180°	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1435840

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	823.4	823.4	823.4	823.4
2.5°	814.0	818.3	818.3	818.3
5°	784.0	802.1	806.4	810.6
7.5°	724.7	764.9	784.0	803.0
10°	683.0	721.3	759.6	797.9
12.5°	647.2	681.8	736.0	790.2
15°	618.1	647.1	708.1	769.1
17.5°	596.6	615.3	679.1	743.0
20°	591.5	600.0	663.8	727.6
22.5°	582.1	581.8	644.5	707.2
25°	565.9	556.4	611.7	667.0
27.5°	546.4	530.5	574.2	617.9
30°	531.9	513.5	550.3	587.2
32.5°	514.9	495.6	522.3	548.9
35°	491.5	468.8	480.1	491.5
37.5°	468.9	441.4	437.7	434.0
40°	451.1	421.3	408.5	395.7
42.5°	434.0	403.1	389.2	375.3
45°	407.4	377.7	369.1	360.6
47.5°	381.3	350.8	344.5	338.3
50°	361.7	329.8	321.3	312.8
52.5°	339.6	305.1	300.0	294.9
55°	304.2	269.1	273.4	277.7
57.5°	268.1	230.1	233.8	237.4
60°	242.5	202.8	209.9	217.0
62.5°	223.0	184.4	189.2	194.0
65°	196.8	162.1	159.2	156.4
67.5°	172.5	141.3	131.9	122.6
70°	156.4	127.7	114.9	102.1
72.5°	138.5	114.9	102.1	89.4
75°	110.6	92.6	79.8	67.0
77.5°	82.1	69.5	59.0	48.5
80°	61.7	52.5	45.4	38.3
82.5°	43.8	37.4	31.5	25.5
85°	21.3	18.4	15.6	12.8
87.5°	11.6	8.8	6.2	3.6
90°	32.3	19.7	12.6	5.4
92.5°	69.6	48.4	34.1	19.7
95°	139.9	111.2	78.9	55.6
97.5°	222.8	176.5	144.6	106.2
100°	267.3	222.4	191.9	150.7
102.5°	316.1	278.4	236.4	195.2
105°	403.6	357.0	308.5	261.9
107.5°	484.7	433.4	375.3	333.3
110°	536.3	480.7	419.7	382.1



TEST NUMBER: P1435840

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	586.6	529.5	467.1	429.4
115°	654.7	591.9	534.5	502.3
117.5°	720.4	655.8	595.2	569.7
120°	760.6	696.0	636.8	617.1
122.5°	793.6	730.4	675.5	667.3
125°	843.1	778.5	731.9	742.6
127.5°	883.3	824.1	794.6	818.7
130°	907.7	855.6	837.7	871.8
132.5°	929.2	888.6	880.7	927.7
135°	961.5	938.1	945.3	1009.9
137.5°	999.9	990.9	1014.9	1096.4
140°	1024.2	1029.6	1063.7	1155.2
142.5°	1057.3	1069.8	1113.9	1211.2
145°	1108.6	1135.5	1192.9	1289.7
147.5°	1166.7	1201.5	1272.5	1371.9
150°	1205.4	1250.3	1325.6	1420.7
152.5°	1249.9	1296.2	1371.5	1468.0
155°	1318.4	1370.4	1449.4	1531.9
157.5°	1388.4	1441.5	1516.8	1588.9
160°	1431.4	1488.8	1557.0	1623.4
162.5°	1480.2	1533.3	1592.9	1652.1
165°	1551.6	1594.7	1643.1	1693.3
167.5°	1611.5	1647.4	1685.4	1724.5
170°	1650.3	1679.0	1711.3	1741.8
172.5°	1683.3	1706.2	1729.9	1756.1
175°	1727.4	1740.0	1754.3	1770.5
177.5°	1761.5	1765.8	1770.1	1777.3
180°	1775.8	1775.8	1775.8	1775.8



TEST NUMBER: P1435840
 CATALOG NUMBER: SQ2W-FA-K-125U-050D-L940-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.92	13.61	14.04	14.73	16.28	14.12	14.81	15.24	15.93	17.48
	3H	13.99	14.62	15.12	15.74	17.31	15.35	15.97	16.48	17.09	18.66
	4H	14.34	14.93	15.48	16.05	17.62	15.73	16.32	16.87	17.44	19.02
	6H	14.49	15.03	15.64	16.16	17.74	15.88	16.42	17.03	17.55	19.13
	8H	14.52	15.04	15.67	16.18	17.75	15.90	16.42	17.05	17.56	19.14
	12H	14.51	15.00	15.67	16.14	17.74	15.88	16.37	17.04	17.51	19.10
4H	2H	13.76	14.35	14.91	15.48	17.05	14.68	15.27	15.83	16.39	17.97
	3H	15.14	15.63	16.29	16.78	18.36	16.13	16.62	17.28	17.77	19.35
	4H	15.58	16.04	16.74	17.18	18.78	16.59	17.05	17.75	18.19	19.79
	6H	15.80	16.19	16.97	17.35	18.95	16.81	17.20	17.97	18.36	19.95
	8H	15.86	16.22	17.02	17.37	18.98	16.85	17.21	18.01	18.37	19.98
	12H	15.85	16.18	17.03	17.35	18.96	16.83	17.16	18.01	18.33	19.94
8H	4H	15.95	16.32	17.12	17.47	19.08	16.78	17.14	17.94	18.29	19.90
	6H	16.30	16.60	17.48	17.79	19.40	17.08	17.38	18.27	18.58	20.19
	8H	16.41	16.67	17.60	17.85	19.48	17.18	17.44	18.37	18.61	20.24
	12H	16.44	16.67	17.63	17.84	19.50	17.19	17.41	18.38	18.59	20.25
12H	4H	15.95	16.28	17.13	17.44	19.06	16.74	17.07	17.92	18.23	19.85
	6H	16.37	16.63	17.55	17.80	19.43	17.10	17.36	18.29	18.54	20.16
	8H	16.50	16.73	17.70	17.91	19.57	17.21	17.44	18.40	18.61	20.27