

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1435978

Luminaire Tested: SQ2W-FB-K-075U-125D-L940-UNV-STD-W-WM-4

Issue Date: 3/24/2026

Test Information

Test Method: LM-79-2019
Report Number: P1435978
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-12)
Test Lab: INNOVATION CENTER
Issue Date: 3/24/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-FB-K-075U-125D-L940-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS BATWING ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1250 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8306.7 lumens
Efficiency: N/A
Efficacy: 114.1 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 2.98 / 2.52
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 72.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1435978

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L940-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

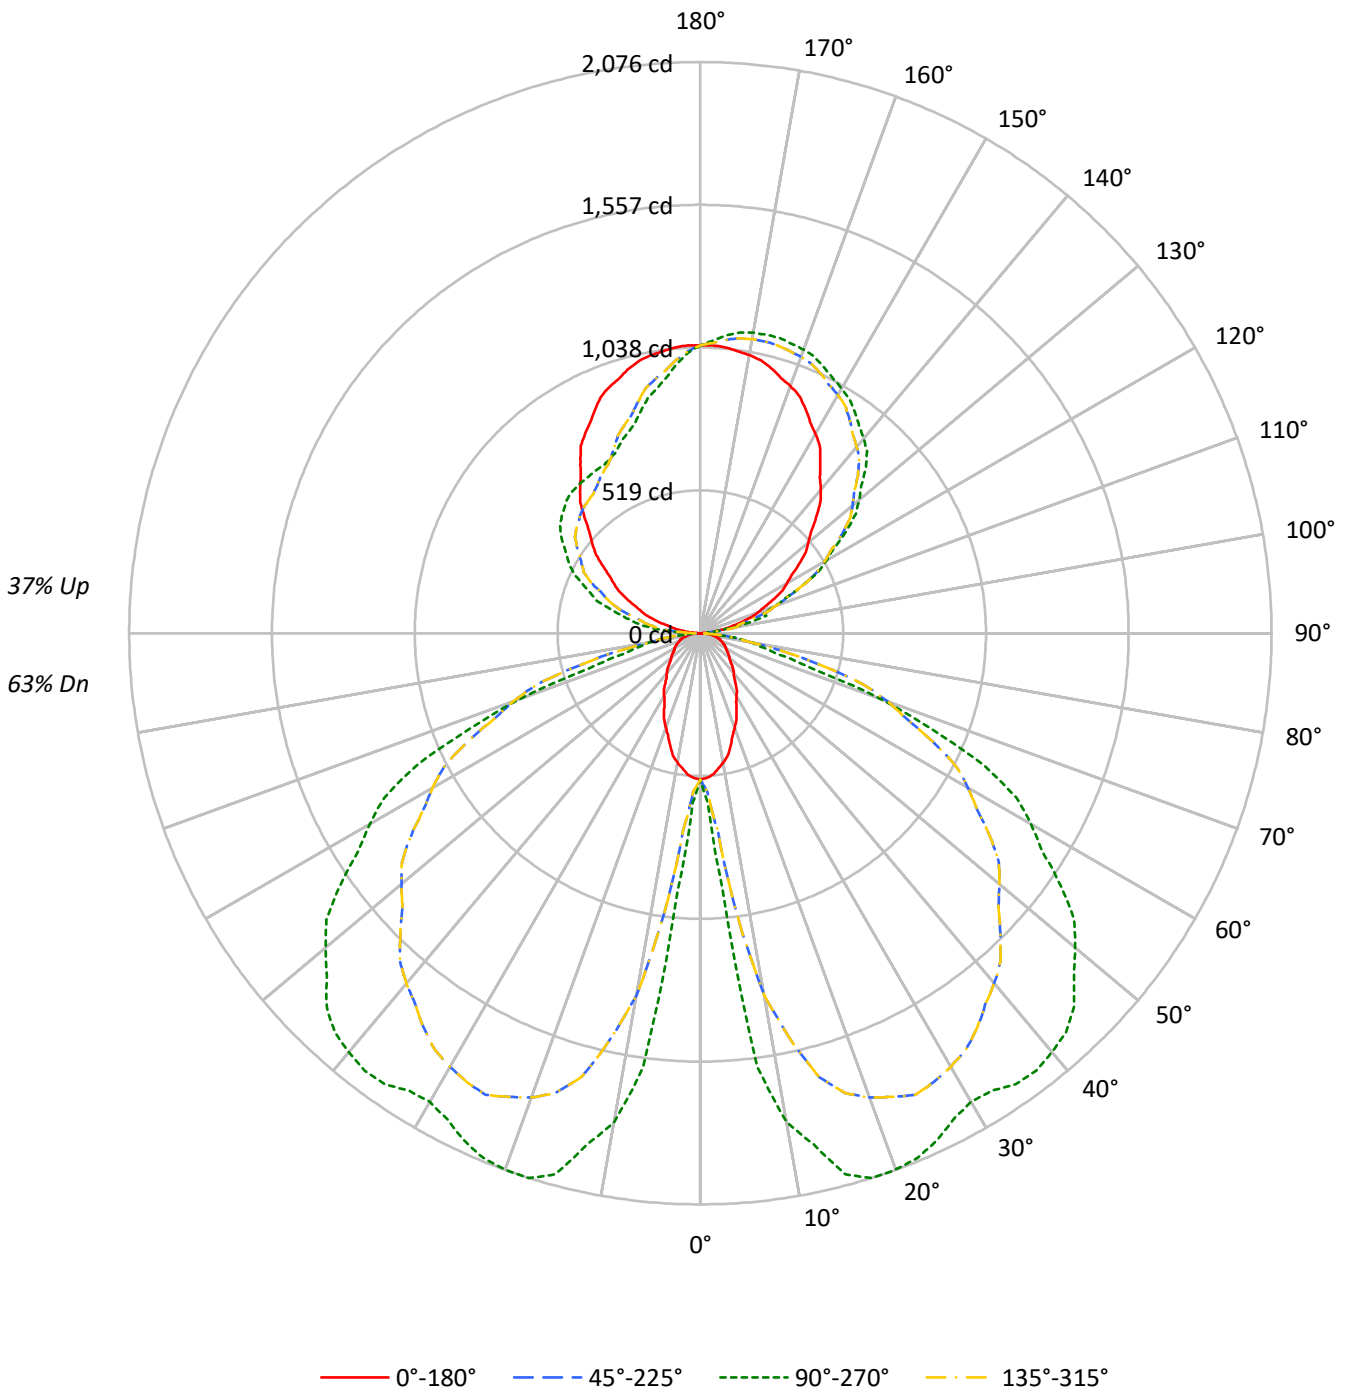



TEST NUMBER: P1435978

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L940-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	91	91	91	79	79	79	68	68	68	63
1	101	96	92	88	94	90	87	83	79	77	74	69	67	65	60	59	57	53
2	91	83	77	71	85	78	73	68	69	64	61	60	57	54	52	50	47	43
3	83	73	65	59	77	68	61	56	60	55	50	53	48	45	46	42	40	36
4	75	64	56	49	70	60	53	47	53	47	42	47	42	38	40	37	34	30
5	69	57	48	42	64	53	46	40	47	41	36	41	36	32	36	32	29	26
6	63	51	42	36	59	48	40	34	42	36	31	37	32	28	32	28	25	22
7	58	45	37	31	54	43	35	30	38	32	27	33	28	24	29	25	22	19
8	54	41	33	27	50	39	31	26	34	28	24	30	25	22	27	22	19	17
9	50	37	29	24	47	35	28	23	31	25	21	28	23	19	24	20	17	15
10	47	34	26	21	44	32	25	21	29	23	19	26	21	17	22	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	8578	8578	8578	8578
5°	8363	15194	8363	15194
10°	7832	29568	7832	29568
15°	7089	34032	7089	34032
20°	6276	35640	6276	35640
25°	5553	36224	5553	36224
30°	4905	36671	4905	36671
35°	4380	39424	4380	39424
40°	3983	41890	3983	41890
45°	3674	43863	3674	43863
50°	3464	44660	3464	44660
55°	3381	45016	3381	45016
60°	3465	44791	3465	44791
65°	3610	43525	3610	43525
70°	3739	32922	3739	32922
75°	4142	18166	4142	18166
80°	4277	16866	4277	16866
85°	4261	7095	4261	7095

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 52.5°
 Luminance: 45422 cd/sqm



TEST NUMBER: P1435978

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L940-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	89.0	1.1
10°-20°	406.2	4.9
20°-30°	714.8	8.6
30°-40°	925.3	11.1
40°-50°	1020.4	12.3
50°-60°	952.4	11.5
60°-70°	735.8	8.9
70°-80°	339.2	4.1
80°-90°	69.2	0.8
90°-100°	83.3	1.0
100°-110°	242.8	2.9
110°-120°	396.2	4.8
120°-130°	502.8	6.1
130°-140°	538.0	6.5
140°-150°	502.4	6.0
150°-160°	413.4	5.0
160°-170°	277.2	3.3
170°-180°	98.4	1.2
0°-30°	1210.0	14.6
0°-40°	2135.3	25.7
0°-60°	4108.1	49.5
0°-90°	5252.2	63.2
90°-120°	722.3	8.7
90°-150°	2265.4	27.3
90°-180°	3054.0	36.8
0°-180°	8306.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	531	531	531	531	531	
5°	516	938	516	938	516	48
15°	424	2036	424	2036	424	118
25°	312	2033	312	2033	312	143
35°	222	2000	222	2000	222	140
45°	161	1921	161	1921	161	125
55°	120	1599	120	1599	120	108
65°	94	1139	94	1139	94	93
75°	66	291	66	291	66	68
85°	23	38	23	38	23	24
90°	3	23	3	45	3	4
95°	33	24	33	143	33	40
105°	154	247	154	340	154	164
115°	296	410	296	505	296	292
125°	438	650	438	619	438	391
135°	595	851	595	686	595	460
145°	760	981	760	701	760	475
155°	902	1065	902	727	902	415
165°	998	1111	998	837	998	281
175°	1043	1087	1043	982	1043	99
180°	1046	1046	1046	1046	1046	



TEST NUMBER: P1435978

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	531.3	531.3	531.3	531.3	531.3	531.3	531.3	531.3	531.3	531.3	531.3
2.5°	527.3	537.3	547.2	557.9	568.8	580.6	593.3	604.2	609.7	615.1	609.7
5°	516.0	550.1	584.1	633.5	688.0	749.9	819.2	878.5	908.0	937.5	908.0
7.5°	496.1	565.4	634.6	781.4	953.9	1133.1	1318.8	1472.9	1531.9	1591.0	1531.9
10°	477.7	574.2	670.7	919.6	1219.4	1449.9	1611.1	1739.9	1771.7	1803.5	1771.7
12.5°	457.3	588.3	719.3	1026.6	1392.6	1632.2	1745.3	1838.3	1871.0	1903.7	1871.0
15°	424.1	611.4	798.7	1146.1	1546.9	1793.3	1885.3	1963.3	1999.7	2036.0	1999.7
17.5°	389.8	639.2	888.5	1242.9	1632.3	1872.6	1963.6	2036.8	2056.6	2076.3	2056.6
20°	365.3	658.2	951.1	1306.2	1682.0	1909.1	1987.5	2049.3	2061.8	2074.3	2061.8
22.5°	342.8	670.3	997.7	1353.2	1718.1	1930.2	1989.5	2037.3	2050.7	2064.1	2050.7
25°	311.7	680.6	1049.6	1404.2	1753.9	1947.4	1984.9	2015.3	2024.4	2033.4	2024.4
27.5°	281.5	671.4	1061.3	1411.3	1748.1	1928.7	1953.2	1973.8	1982.7	1991.5	1982.7
30°	263.1	659.4	1055.6	1402.5	1732.8	1907.1	1925.3	1942.0	1954.5	1967.0	1954.5
32.5°	246.8	644.8	1042.9	1385.4	1709.5	1880.1	1897.4	1917.1	1944.1	1971.1	1944.1
35°	222.2	613.9	1005.6	1344.6	1665.9	1840.1	1867.4	1900.3	1950.3	2000.2	1950.3
37.5°	201.3	574.4	947.5	1282.9	1605.8	1795.7	1852.7	1907.5	1955.7	2003.8	1955.7
40°	189.0	546.7	904.3	1237.3	1562.0	1762.4	1838.4	1905.7	1946.6	1987.5	1946.6
42.5°	176.8	515.3	853.9	1184.1	1511.6	1719.7	1808.5	1885.3	1926.1	1967.0	1926.1
45°	160.9	465.2	769.5	1096.8	1431.7	1651.4	1755.8	1843.8	1882.4	1921.0	1882.4
47.5°	146.1	410.4	674.7	1003.4	1353.6	1584.1	1694.9	1785.0	1813.2	1841.3	1813.2
50°	137.9	374.1	610.3	940.1	1301.1	1536.1	1645.1	1732.6	1755.3	1778.0	1755.3
52.5°	129.8	338.7	547.6	878.1	1249.1	1486.0	1588.6	1670.8	1691.7	1712.6	1691.7
55°	120.1	290.4	460.7	787.7	1166.9	1401.3	1491.0	1562.8	1581.0	1599.2	1581.0
57.5°	111.4	248.8	386.1	702.8	1079.3	1305.8	1382.4	1443.4	1458.2	1473.0	1458.2
60°	107.3	226.5	345.7	649.7	1015.3	1232.7	1302.0	1357.6	1372.4	1387.1	1372.4
62.5°	101.2	204.9	308.7	596.6	945.8	1152.3	1216.1	1267.5	1281.3	1295.2	1281.3
65°	94.5	178.5	262.6	522.0	839.9	1025.5	1078.9	1121.2	1130.3	1139.3	1130.3
67.5°	85.3	156.6	227.9	453.7	730.9	886.1	919.3	939.9	922.9	905.8	922.9
70°	79.2	145.0	210.9	412.1	658.5	787.4	798.7	795.0	746.2	697.4	746.2
72.5°	75.1	133.7	192.3	366.5	579.3	673.2	648.2	606.3	513.9	421.5	513.9
75°	66.4	114.1	161.8	292.9	451.9	476.9	367.9	286.7	288.9	291.2	288.9
77.5°	54.2	89.8	125.5	206.1	301.7	320.6	262.9	220.2	222.2	224.3	222.2
80°	46.0	74.4	102.8	134.5	167.5	182.8	180.5	179.1	180.2	181.4	180.2
82.5°	37.8	58.9	80.0	99.1	117.5	127.8	130.1	131.4	129.8	128.2	129.8
85°	23.0	35.5	48.0	55.3	61.0	59.3	50.2	42.9	40.6	38.3	40.6
87.5°	8.8	14.2	19.8	19.0	16.1	14.4	14.4	14.7	14.9	14.9	14.9
90°	3.2	7.4	12.7	16.9	20.1	21.1	21.1	22.2	23.2	23.2	23.2
92.5°	11.6	18.4	18.6	18.6	22.6	24.5	26.2	26.4	27.5	27.5	27.5
95°	32.8	35.9	53.9	52.8	35.9	28.5	24.3	24.3	24.3	24.3	24.3
97.5°	62.6	67.2	70.2	94.0	99.3	95.9	78.2	65.7	58.8	55.6	58.8
100°	88.8	90.9	97.2	98.3	124.7	150.0	137.4	121.5	116.2	113.1	116.2
102.5°	115.0	116.2	126.0	130.4	136.5	150.9	194.9	190.0	186.4	185.8	186.4
105°	154.3	155.3	173.3	181.7	186.0	186.0	184.9	206.1	239.9	247.3	239.9
107.5°	196.3	201.2	222.3	244.9	249.8	251.1	245.6	242.4	241.1	242.0	241.1
110°	225.1	232.5	257.8	286.4	293.8	295.9	293.8	290.6	288.5	288.5	288.5



TEST NUMBER: P1435978

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	253.0	263.7	292.5	325.2	337.7	344.1	339.4	337.1	335.0	336.7	335.0
115°	295.9	311.7	349.8	383.6	408.9	412.1	411.0	411.0	410.0	410.0	410.0
117.5°	335.6	361.0	403.7	443.0	472.3	480.8	485.0	483.7	482.5	484.6	482.5
120°	363.5	393.1	441.7	486.1	514.6	527.3	531.5	529.4	531.5	529.4	531.5
122.5°	393.1	429.4	477.2	523.3	556.9	571.2	576.3	576.7	577.2	575.9	577.2
125°	437.5	481.8	537.8	585.4	620.3	637.2	641.4	642.5	644.6	649.9	644.6
127.5°	482.3	532.6	594.1	639.9	675.6	696.1	702.7	705.0	709.5	711.8	709.5
130°	513.5	570.6	632.9	676.3	711.1	733.3	745.0	748.1	753.4	752.4	753.4
132.5°	546.5	606.1	669.3	714.3	746.6	770.5	780.5	789.5	791.5	792.9	791.5
135°	594.9	659.4	722.8	767.1	797.8	821.0	833.7	842.2	847.5	850.6	847.5
137.5°	645.8	713.9	774.8	814.3	845.1	865.2	879.6	888.5	893.9	896.5	893.9
140°	680.5	746.0	805.2	846.4	873.9	893.9	906.6	917.2	923.5	923.5	923.5
142.5°	713.5	778.1	835.6	876.8	900.9	919.3	932.8	940.9	948.0	948.0	948.0
145°	759.7	824.2	877.0	918.3	938.3	955.2	970.0	976.4	980.6	980.6	980.6
147.5°	808.1	865.2	913.4	952.9	969.8	989.7	1001.3	1006.4	1011.7	1009.3	1011.7
150°	836.9	889.7	936.2	973.2	990.1	1009.1	1020.7	1025.0	1030.3	1027.1	1030.3
152.5°	864.8	915.1	957.3	991.8	1006.2	1025.2	1038.5	1042.7	1046.3	1044.0	1046.3
155°	902.4	946.8	985.9	1017.6	1030.3	1048.2	1060.9	1066.2	1070.4	1065.1	1070.4
157.5°	936.0	974.3	1008.3	1037.4	1051.0	1066.4	1078.2	1084.8	1089.0	1086.7	1089.0
160°	956.3	991.2	1021.8	1049.3	1062.0	1075.7	1088.4	1095.8	1100.0	1096.8	1100.0
162.5°	973.2	1004.7	1033.6	1058.6	1069.6	1081.6	1096.8	1103.4	1107.6	1103.6	1107.6
165°	997.5	1022.9	1048.2	1069.4	1078.9	1088.4	1104.2	1111.6	1114.8	1110.6	1114.8
167.5°	1015.9	1035.3	1055.8	1074.0	1081.0	1090.3	1106.1	1112.3	1116.3	1111.0	1116.3
170°	1026.0	1042.9	1060.9	1075.7	1081.0	1089.4	1105.3	1110.6	1113.7	1108.5	1113.7
172.5°	1034.5	1047.2	1061.7	1074.9	1077.6	1084.4	1099.4	1104.6	1107.0	1102.5	1107.0
175°	1042.9	1050.3	1060.9	1069.4	1068.3	1072.5	1085.2	1089.4	1093.7	1087.3	1093.7
177.5°	1047.0	1050.3	1053.7	1058.8	1055.4	1055.4	1064.7	1067.2	1068.1	1064.7	1068.1
180°	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1



TEST NUMBER: P1435978

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	531.3	531.3	531.3	531.3	531.3	531.3	531.3	531.3	531.3	531.3	531.3
2.5°	604.2	593.3	580.6	568.8	557.9	547.2	537.3	527.3	537.3	547.2	557.9
5°	878.5	819.2	749.9	688.0	633.5	584.1	550.1	516.0	550.1	584.1	633.5
7.5°	1472.9	1318.8	1133.1	953.9	781.4	634.6	565.4	496.1	565.4	634.6	781.4
10°	1739.9	1611.1	1449.9	1219.4	919.6	670.7	574.2	477.7	574.2	670.7	919.6
12.5°	1838.3	1745.3	1632.2	1392.6	1026.6	719.3	588.3	457.3	588.3	719.3	1026.6
15°	1963.3	1885.3	1793.3	1546.9	1146.1	798.7	611.4	424.1	611.4	798.7	1146.1
17.5°	2036.8	1963.6	1872.6	1632.3	1242.9	888.5	639.2	389.8	639.2	888.5	1242.9
20°	2049.3	1987.5	1909.1	1682.0	1306.2	951.1	658.2	365.3	658.2	951.1	1306.2
22.5°	2037.3	1989.5	1930.2	1718.1	1353.2	997.7	670.3	342.8	670.3	997.7	1353.2
25°	2015.3	1984.9	1947.4	1753.9	1404.2	1049.6	680.6	311.7	680.6	1049.6	1404.2
27.5°	1973.8	1953.2	1928.7	1748.1	1411.3	1061.3	671.4	281.5	671.4	1061.3	1411.3
30°	1942.0	1925.3	1907.1	1732.8	1402.5	1055.6	659.4	263.1	659.4	1055.6	1402.5
32.5°	1917.1	1897.4	1880.1	1709.5	1385.4	1042.9	644.8	246.8	644.8	1042.9	1385.4
35°	1900.3	1867.4	1840.1	1665.9	1344.6	1005.6	613.9	222.2	613.9	1005.6	1344.6
37.5°	1907.5	1852.7	1795.7	1605.8	1282.9	947.5	574.4	201.3	574.4	947.5	1282.9
40°	1905.7	1838.4	1762.4	1562.0	1237.3	904.3	546.7	189.0	546.7	904.3	1237.3
42.5°	1885.3	1808.5	1719.7	1511.6	1184.1	853.9	515.3	176.8	515.3	853.9	1184.1
45°	1843.8	1755.8	1651.4	1431.7	1096.8	769.5	465.2	160.9	465.2	769.5	1096.8
47.5°	1785.0	1694.9	1584.1	1353.6	1003.4	674.7	410.4	146.1	410.4	674.7	1003.4
50°	1732.6	1645.1	1536.1	1301.1	940.1	610.3	374.1	137.9	374.1	610.3	940.1
52.5°	1670.8	1588.6	1486.0	1249.1	878.1	547.6	338.7	129.8	338.7	547.6	878.1
55°	1562.8	1491.0	1401.3	1166.9	787.7	460.7	290.4	120.1	290.4	460.7	787.7
57.5°	1443.4	1382.4	1305.8	1079.3	702.8	386.1	248.8	111.4	248.8	386.1	702.8
60°	1357.6	1302.0	1232.7	1015.3	649.7	345.7	226.5	107.3	226.5	345.7	649.7
62.5°	1267.5	1216.1	1152.3	945.8	596.6	308.7	204.9	101.2	204.9	308.7	596.6
65°	1121.2	1078.9	1025.5	839.9	522.0	262.6	178.5	94.5	178.5	262.6	522.0
67.5°	939.9	919.3	886.1	730.9	453.7	227.9	156.6	85.3	156.6	227.9	453.7
70°	795.0	798.7	787.4	658.5	412.1	210.9	145.0	79.2	145.0	210.9	412.1
72.5°	606.3	648.2	673.2	579.3	366.5	192.3	133.7	75.1	133.7	192.3	366.5
75°	286.7	367.9	476.9	451.9	292.9	161.8	114.1	66.4	114.1	161.8	292.9
77.5°	220.2	262.9	320.6	301.7	206.1	125.5	89.8	54.2	89.8	125.5	206.1
80°	179.1	180.5	182.8	167.5	134.5	102.8	74.4	46.0	74.4	102.8	134.5
82.5°	131.4	130.1	127.8	117.5	99.1	80.0	58.9	37.8	58.9	80.0	99.1
85°	42.9	50.2	59.3	61.0	55.3	48.0	35.5	23.0	35.5	48.0	55.3
87.5°	14.7	14.4	14.4	16.1	19.0	19.8	14.2	8.8	14.2	19.6	19.5
90°	22.2	21.1	21.1	20.1	16.9	12.7	7.4	3.2	7.4	11.6	19.0
92.5°	26.4	26.2	24.5	22.6	18.6	18.6	18.4	11.6	20.1	28.5	41.0
95°	24.3	24.3	28.5	35.9	52.8	53.9	35.9	32.8	46.5	65.5	82.4
97.5°	65.7	78.2	95.9	99.3	94.0	70.2	67.2	62.6	85.2	104.0	131.2
100°	121.5	137.4	150.0	124.7	98.3	97.2	90.9	88.8	113.1	131.0	157.4
102.5°	190.0	194.9	150.9	136.5	130.4	126.0	116.2	115.0	139.3	164.0	186.2
105°	206.1	184.9	186.0	186.0	181.7	173.3	155.3	154.3	181.7	210.3	237.8
107.5°	242.4	245.6	251.1	249.8	244.9	222.3	201.2	196.3	221.1	255.3	285.5
110°	290.6	293.8	295.9	293.8	286.4	257.8	232.5	225.1	247.3	283.2	315.9



TEST NUMBER: P1435978

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	337.1	339.4	344.1	337.7	325.2	292.5	263.7	253.0	275.2	311.9	345.5
115°	411.0	411.0	412.1	408.9	383.6	349.8	311.7	295.9	314.9	348.7	385.7
117.5°	483.7	485.0	480.8	472.3	443.0	403.7	361.0	335.6	350.6	386.3	424.4
120°	529.4	531.5	527.3	514.6	486.1	441.7	393.1	363.5	375.1	410.0	448.0
122.5°	576.7	576.3	571.2	556.9	523.3	477.2	429.4	393.1	397.9	430.3	467.5
125°	642.5	641.4	637.2	620.3	585.4	537.8	481.8	437.5	431.1	458.6	496.6
127.5°	705.0	702.7	696.1	675.6	639.9	594.1	532.6	482.3	468.1	485.4	520.3
130°	748.1	745.0	733.3	711.1	676.3	632.9	570.6	513.5	493.5	504.0	534.7
132.5°	789.5	780.5	770.5	746.6	714.3	669.3	606.1	546.5	518.8	523.5	547.4
135°	842.2	833.7	821.0	797.8	767.1	722.8	659.4	594.9	556.9	552.6	566.4
137.5°	888.5	879.6	865.2	845.1	814.3	774.8	713.9	645.8	597.9	583.7	589.0
140°	917.2	906.6	893.9	873.9	846.4	805.2	746.0	680.5	626.6	606.5	603.4
142.5°	940.9	932.8	919.3	900.9	876.8	835.6	778.1	713.5	656.2	630.2	622.8
145°	976.4	970.0	955.2	938.3	918.3	877.0	824.2	759.7	702.7	668.9	653.0
147.5°	1006.4	1001.3	989.7	969.8	952.9	913.4	865.2	808.1	749.6	707.8	687.3
150°	1025.0	1020.7	1009.1	990.1	973.2	936.2	889.7	836.9	780.9	736.5	710.1
152.5°	1042.7	1038.5	1025.2	1006.2	991.8	957.3	915.1	864.8	807.9	763.6	736.3
155°	1066.2	1060.9	1048.2	1030.3	1017.6	985.9	946.8	902.4	853.8	807.3	776.7
157.5°	1084.8	1078.2	1066.4	1051.0	1037.4	1008.3	974.3	936.0	893.5	849.1	817.9
160°	1095.8	1088.4	1075.7	1062.0	1049.3	1021.8	991.2	956.3	917.2	877.0	843.2
162.5°	1103.4	1096.8	1081.6	1069.6	1058.6	1033.6	1004.7	973.2	938.3	903.2	872.0
165°	1111.6	1104.2	1088.4	1078.9	1069.4	1048.2	1022.9	997.5	967.9	939.4	914.0
167.5°	1112.3	1106.1	1090.3	1081.0	1074.0	1055.8	1035.3	1015.9	992.9	970.5	949.3
170°	1110.6	1105.3	1089.4	1081.0	1075.7	1060.9	1042.9	1026.0	1008.1	989.0	972.1
172.5°	1104.6	1099.4	1084.4	1077.6	1074.9	1061.7	1047.2	1034.5	1019.1	1005.1	991.6
175°	1089.4	1085.2	1072.5	1068.3	1069.4	1060.9	1050.3	1042.9	1033.4	1025.0	1017.6
177.5°	1067.2	1064.7	1055.4	1055.4	1058.8	1053.7	1050.3	1047.0	1042.7	1040.2	1037.7
180°	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1



TEST NUMBER: P1435978

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	531.3	531.3	531.3	531.3	531.3	531.3	531.3	531.3	531.3	531.3	531.3
2.5°	568.8	580.6	593.3	604.2	609.7	615.1	609.7	604.2	593.3	580.6	568.8
5°	688.0	749.9	819.2	878.5	908.0	937.5	908.0	878.5	819.2	749.9	688.0
7.5°	953.9	1133.1	1318.8	1472.9	1531.9	1591.0	1531.9	1472.9	1318.8	1133.1	953.9
10°	1219.4	1449.9	1611.1	1739.9	1771.7	1803.5	1771.7	1739.9	1611.1	1449.9	1219.4
12.5°	1392.6	1632.2	1745.3	1838.3	1871.0	1903.7	1871.0	1838.3	1745.3	1632.2	1392.6
15°	1546.9	1793.3	1885.3	1963.3	1999.7	2036.0	1999.7	1963.3	1885.3	1793.3	1546.9
17.5°	1632.3	1872.6	1963.6	2036.8	2056.6	2076.3	2056.6	2036.8	1963.6	1872.6	1632.3
20°	1682.0	1909.1	1987.5	2049.3	2061.8	2074.3	2061.8	2049.3	1987.5	1909.1	1682.0
22.5°	1718.1	1930.2	1989.5	2037.3	2050.7	2064.1	2050.7	2037.3	1989.5	1930.2	1718.1
25°	1753.9	1947.4	1984.9	2015.3	2024.4	2033.4	2024.4	2015.3	1984.9	1947.4	1753.9
27.5°	1748.1	1928.7	1953.2	1973.8	1982.7	1991.5	1982.7	1973.8	1953.2	1928.7	1748.1
30°	1732.8	1907.1	1925.3	1942.0	1954.5	1967.0	1954.5	1942.0	1925.3	1907.1	1732.8
32.5°	1709.5	1880.1	1897.4	1917.1	1944.1	1971.1	1944.1	1917.1	1897.4	1880.1	1709.5
35°	1665.9	1840.1	1867.4	1900.3	1950.3	2000.2	1950.3	1900.3	1867.4	1840.1	1665.9
37.5°	1605.8	1795.7	1852.7	1907.5	1955.7	2003.8	1955.7	1907.5	1852.7	1795.7	1605.8
40°	1562.0	1762.4	1838.4	1905.7	1946.6	1987.5	1946.6	1905.7	1838.4	1762.4	1562.0
42.5°	1511.6	1719.7	1808.5	1885.3	1926.1	1967.0	1926.1	1885.3	1808.5	1719.7	1511.6
45°	1431.7	1651.4	1755.8	1843.8	1882.4	1921.0	1882.4	1843.8	1755.8	1651.4	1431.7
47.5°	1353.6	1584.1	1694.9	1785.0	1813.2	1841.3	1813.2	1785.0	1694.9	1584.1	1353.6
50°	1301.1	1536.1	1645.1	1732.6	1755.3	1778.0	1755.3	1732.6	1645.1	1536.1	1301.1
52.5°	1249.1	1486.0	1588.6	1670.8	1691.7	1712.6	1691.7	1670.8	1588.6	1486.0	1249.1
55°	1166.9	1401.3	1491.0	1562.8	1581.0	1599.2	1581.0	1562.8	1491.0	1401.3	1166.9
57.5°	1079.3	1305.8	1382.4	1443.4	1458.2	1473.0	1458.2	1443.4	1382.4	1305.8	1079.3
60°	1015.3	1232.7	1302.0	1357.6	1372.4	1387.1	1372.4	1357.6	1302.0	1232.7	1015.3
62.5°	945.8	1152.3	1216.1	1267.5	1281.3	1295.2	1281.3	1267.5	1216.1	1152.3	945.8
65°	839.9	1025.5	1078.9	1121.2	1130.3	1139.3	1130.3	1121.2	1078.9	1025.5	839.9
67.5°	730.9	886.1	919.3	939.9	922.9	905.8	922.9	939.9	919.3	886.1	730.9
70°	658.5	787.4	798.7	795.0	746.2	697.4	746.2	795.0	798.7	787.4	658.5
72.5°	579.3	673.2	648.2	606.3	513.9	421.5	513.9	606.3	648.2	673.2	579.3
75°	451.9	476.9	367.9	286.7	288.9	291.2	288.9	286.7	367.9	476.9	451.9
77.5°	301.7	320.6	262.9	220.2	222.2	224.3	222.2	220.2	262.9	320.6	301.7
80°	167.5	182.8	180.5	179.1	180.2	181.4	180.2	179.1	180.5	182.8	167.5
82.5°	117.5	127.8	130.1	131.4	129.8	128.2	129.8	131.4	130.1	127.8	117.5
85°	61.0	59.3	50.2	42.9	40.6	38.3	40.6	42.9	50.2	59.3	61.0
87.5°	16.9	16.6	18.0	18.9	19.7	19.3	19.7	18.9	18.0	16.6	16.9
90°	24.3	31.7	39.1	43.3	47.6	45.4	47.6	43.3	39.1	31.7	24.3
92.5°	48.8	61.3	70.4	78.0	81.4	80.9	81.4	78.0	70.4	61.3	48.8
95°	98.3	113.1	127.9	138.4	144.8	142.7	144.8	138.4	127.9	113.1	98.3
97.5°	151.5	171.4	187.9	197.8	204.1	208.4	204.1	197.8	187.9	171.4	151.5
100°	187.0	206.1	225.1	236.7	247.3	251.5	247.3	236.7	225.1	206.1	187.0
102.5°	215.8	240.7	261.4	273.9	282.8	287.0	282.8	273.9	261.4	240.7	215.8
105°	263.1	289.5	311.7	327.6	337.1	340.2	337.1	327.6	311.7	289.5	263.1
107.5°	310.5	337.7	358.2	375.8	387.4	394.1	387.4	375.8	358.2	337.7	310.5
110°	347.6	369.8	392.0	407.9	419.5	423.7	419.5	407.9	392.0	369.8	347.6



TEST NUMBER: P1435978

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	378.9	403.7	425.8	441.7	455.0	460.9	455.0	441.7	425.8	403.7	378.9
115°	422.7	455.4	475.5	490.3	499.8	505.1	499.8	490.3	475.5	455.4	422.7
117.5°	459.0	493.3	515.2	526.6	531.1	534.9	531.1	526.6	515.2	493.3	459.0
120°	481.8	513.5	538.9	553.7	559.0	561.1	559.0	553.7	538.9	513.5	481.8
122.5°	503.0	533.0	557.5	575.7	584.3	586.5	584.3	575.7	557.5	533.0	503.0
125°	532.6	561.1	586.5	604.4	613.9	619.2	613.9	604.4	586.5	561.1	532.6
127.5°	558.3	589.2	612.4	628.7	638.0	642.2	638.0	628.7	612.4	589.2	558.3
130°	572.7	604.4	627.7	645.6	654.1	658.3	654.1	645.6	627.7	604.4	572.7
132.5°	583.7	617.1	641.2	657.5	666.8	671.0	666.8	657.5	641.2	617.1	583.7
135°	597.0	631.9	657.3	673.1	681.6	685.8	681.6	673.1	657.3	631.9	597.0
137.5°	608.6	640.3	666.8	683.5	691.1	693.8	691.1	683.5	666.8	640.3	608.6
140°	617.1	644.6	671.0	686.8	695.3	696.3	695.3	686.8	671.0	644.6	617.1
142.5°	628.1	649.6	672.7	688.5	697.0	698.9	697.0	688.5	672.7	649.6	628.1
145°	647.7	660.4	676.3	691.1	698.5	700.6	698.5	691.1	676.3	660.4	647.7
147.5°	672.5	676.5	684.7	694.4	701.6	703.1	701.6	694.4	684.7	676.5	672.5
150°	691.1	690.0	693.2	699.5	705.9	704.8	705.9	699.5	693.2	690.0	691.1
152.5°	712.2	706.1	705.9	708.8	711.8	711.6	711.8	708.8	705.9	706.1	712.2
155°	748.1	736.5	730.2	728.0	728.0	727.0	728.0	728.0	730.2	736.5	748.1
157.5°	787.6	771.4	761.9	756.8	755.3	753.0	755.3	756.8	761.9	771.4	787.6
160°	814.7	796.7	787.2	778.8	775.6	772.4	775.6	778.8	787.2	796.7	814.7
162.5°	840.1	822.9	812.6	805.0	801.8	796.9	801.8	805.0	812.6	822.9	840.1
165°	881.3	863.3	851.7	845.3	841.1	836.9	841.1	845.3	851.7	863.3	881.3
167.5°	922.5	902.8	895.2	888.0	884.0	876.4	884.0	888.0	895.2	902.8	922.5
170°	947.8	929.9	925.6	919.3	911.9	903.5	911.9	919.3	925.6	929.9	947.8
172.5°	969.8	957.8	953.5	947.2	944.9	938.1	944.9	947.2	953.5	957.8	969.8
175°	1001.7	992.2	992.2	991.2	988.0	981.7	988.0	991.2	992.2	992.2	1001.7
177.5°	1028.4	1023.3	1026.7	1026.7	1025.8	1019.9	1025.8	1026.7	1026.7	1023.3	1028.4
180°	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1	1046.1



TEST NUMBER: P1435978

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	531.3	531.3	531.3	531.3
2.5°	557.9	547.2	537.3	527.3
5°	633.5	584.1	550.1	516.0
7.5°	781.4	634.6	565.4	496.1
10°	919.6	670.7	574.2	477.7
12.5°	1026.6	719.3	588.3	457.3
15°	1146.1	798.7	611.4	424.1
17.5°	1242.9	888.5	639.2	389.8
20°	1306.2	951.1	658.2	365.3
22.5°	1353.2	997.7	670.3	342.8
25°	1404.2	1049.6	680.6	311.7
27.5°	1411.3	1061.3	671.4	281.5
30°	1402.5	1055.6	659.4	263.1
32.5°	1385.4	1042.9	644.8	246.8
35°	1344.6	1005.6	613.9	222.2
37.5°	1282.9	947.5	574.4	201.3
40°	1237.3	904.3	546.7	189.0
42.5°	1184.1	853.9	515.3	176.8
45°	1096.8	769.5	465.2	160.9
47.5°	1003.4	674.7	410.4	146.1
50°	940.1	610.3	374.1	137.9
52.5°	878.1	547.6	338.7	129.8
55°	787.7	460.7	290.4	120.1
57.5°	702.8	386.1	248.8	111.4
60°	649.7	345.7	226.5	107.3
62.5°	596.6	308.7	204.9	101.2
65°	522.0	262.6	178.5	94.5
67.5°	453.7	227.9	156.6	85.3
70°	412.1	210.9	145.0	79.2
72.5°	366.5	192.3	133.7	75.1
75°	292.9	161.8	114.1	66.4
77.5°	206.1	125.5	89.8	54.2
80°	134.5	102.8	74.4	46.0
82.5°	99.1	80.0	58.9	37.8
85°	55.3	48.0	35.5	23.0
87.5°	19.5	19.6	14.2	8.8
90°	19.0	11.6	7.4	3.2
92.5°	41.0	28.5	20.1	11.6
95°	82.4	65.5	46.5	32.8
97.5°	131.2	104.0	85.2	62.6
100°	157.4	131.0	113.1	88.8
102.5°	186.2	164.0	139.3	115.0
105°	237.8	210.3	181.7	154.3
107.5°	285.5	255.3	221.1	196.3
110°	315.9	283.2	247.3	225.1



TEST NUMBER: P1435978

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	345.5	311.9	275.2	253.0
115°	385.7	348.7	314.9	295.9
117.5°	424.4	386.3	350.6	335.6
120°	448.0	410.0	375.1	363.5
122.5°	467.5	430.3	397.9	393.1
125°	496.6	458.6	431.1	437.5
127.5°	520.3	485.4	468.1	482.3
130°	534.7	504.0	493.5	513.5
132.5°	547.4	523.5	518.8	546.5
135°	566.4	552.6	556.9	594.9
137.5°	589.0	583.7	597.9	645.8
140°	603.4	606.5	626.6	680.5
142.5°	622.8	630.2	656.2	713.5
145°	653.0	668.9	702.7	759.7
147.5°	687.3	707.8	749.6	808.1
150°	710.1	736.5	780.9	836.9
152.5°	736.3	763.6	807.9	864.8
155°	776.7	807.3	853.8	902.4
157.5°	817.9	849.1	893.5	936.0
160°	843.2	877.0	917.2	956.3
162.5°	872.0	903.2	938.3	973.2
165°	914.0	939.4	967.9	997.5
167.5°	949.3	970.5	992.9	1015.9
170°	972.1	989.0	1008.1	1026.0
172.5°	991.6	1005.1	1019.1	1034.5
175°	1017.6	1025.0	1033.4	1042.9
177.5°	1037.7	1040.2	1042.7	1047.0
180°	1046.1	1046.1	1046.1	1046.1



TEST NUMBER: P1435978
 CATALOG NUMBER: SQ2W-FB-K-075U-125D-L940-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.77	15.80	15.60	16.65	17.72	24.36	25.40	25.19	26.25	27.32
	3H	15.72	16.65	16.56	17.51	18.60	25.98	26.91	26.83	27.78	28.87
	4H	16.13	17.00	16.98	17.87	18.98	26.17	27.04	27.03	27.92	29.02
	6H	16.39	17.20	17.26	18.08	19.19	26.25	27.06	27.12	27.94	29.06
	8H	16.49	17.26	17.37	18.15	19.27	26.28	27.05	27.16	27.94	29.06
	12H	16.54	17.27	17.43	18.17	19.31	26.26	26.99	27.15	27.88	29.03
4H	2H	19.51	20.38	20.37	21.26	22.36	24.75	25.63	25.61	26.50	27.60
	3H	20.65	21.38	21.53	22.29	23.41	26.66	27.39	27.53	28.29	29.41
	4H	20.94	21.61	21.83	22.51	23.66	26.89	27.55	27.77	28.45	29.60
	6H	21.09	21.66	21.99	22.59	23.74	27.03	27.60	27.93	28.53	29.67
	8H	21.13	21.67	22.04	22.59	23.75	27.08	27.61	27.98	28.53	29.69
	12H	21.14	21.63	22.07	22.56	23.73	27.07	27.55	27.99	28.49	29.66
8H	4H	22.15	22.69	23.06	23.61	24.77	26.99	27.53	27.90	28.45	29.61
	6H	22.42	22.86	23.35	23.82	24.98	27.20	27.64	28.13	28.60	29.76
	8H	22.52	22.91	23.46	23.86	25.04	27.29	27.68	28.23	28.63	29.81
	12H	22.57	22.91	23.52	23.86	25.09	27.30	27.65	28.25	28.59	29.82
12H	4H	22.18	22.67	23.11	23.61	24.77	26.95	27.43	27.88	28.37	29.54
	6H	22.53	22.92	23.47	23.87	25.05	27.18	27.57	28.12	28.53	29.71
	8H	22.67	23.02	23.62	23.96	25.19	27.29	27.63	28.24	28.58	29.81