

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427986

Luminaire Tested: SQ2W-PH1-K-150U-125D-L940-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1427986
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-10)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PH1-K-150U-125D-L940-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE HEX LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1250 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12095.4 lumens
Efficiency: N/A
Efficacy: 116.0 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.02 / 1.23
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 104.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427986

CATALOG NUMBER: SQ2W-PH1-K-150U-125D-L940-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

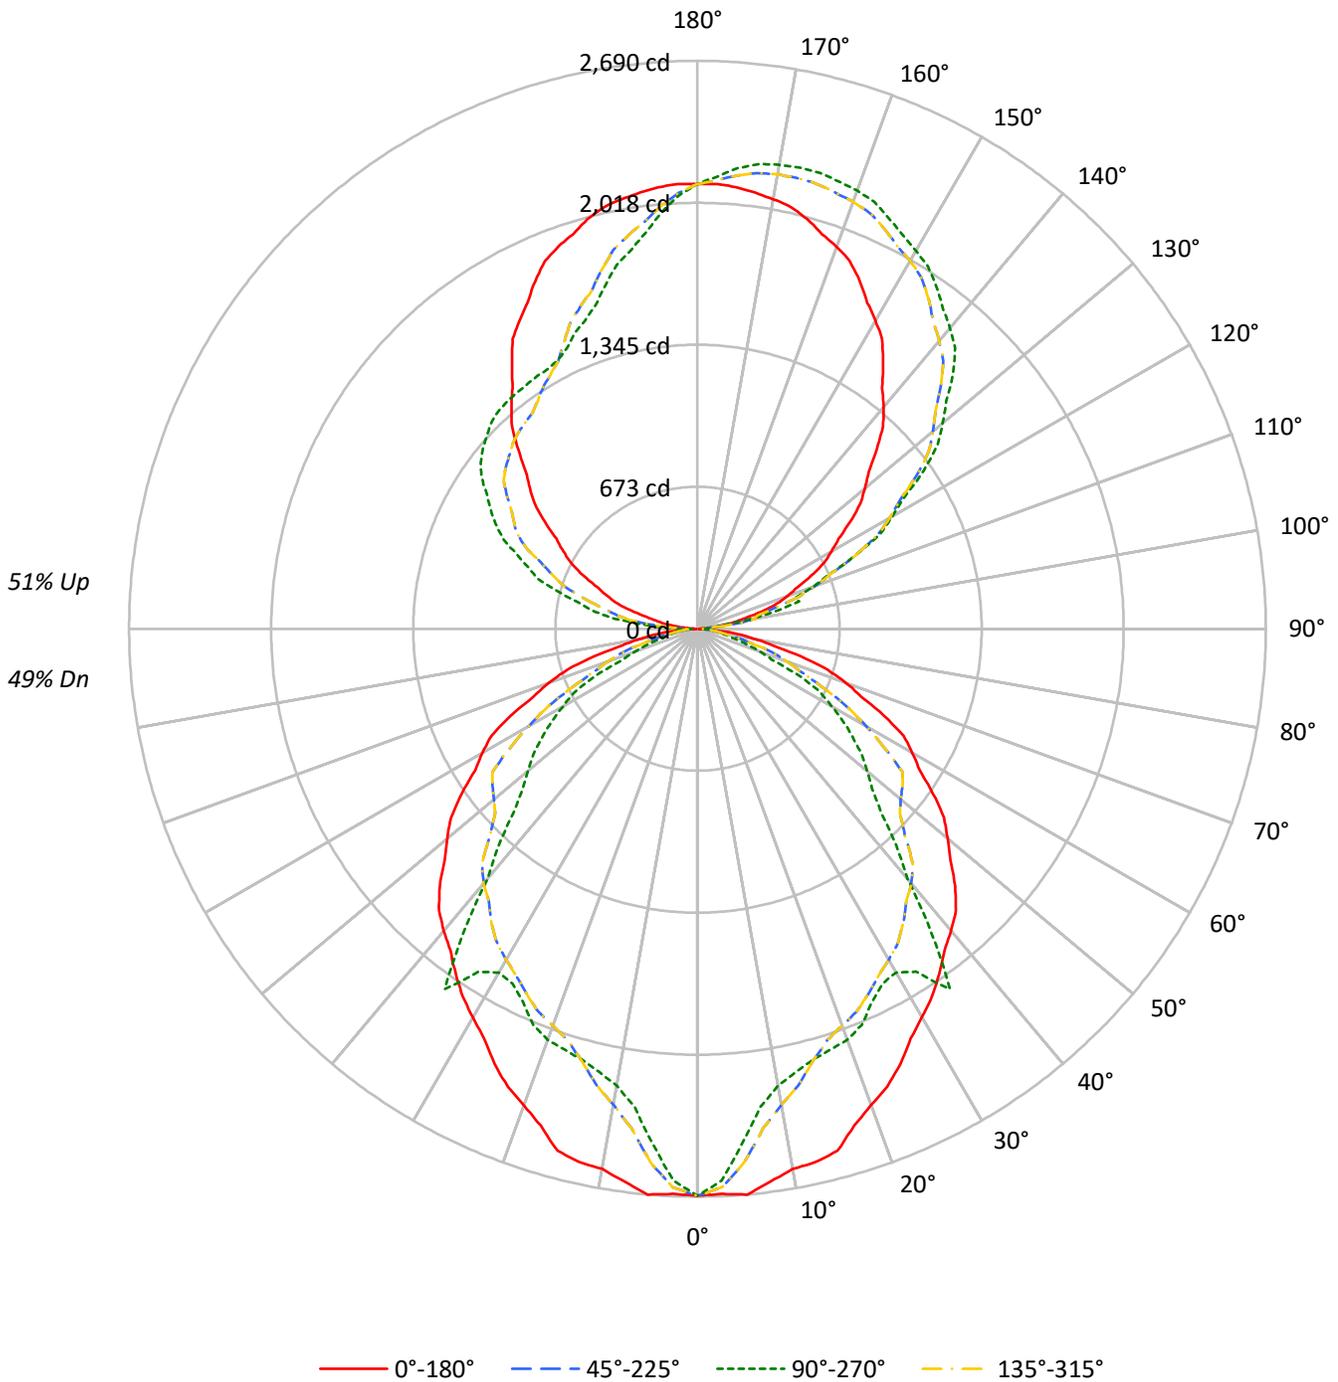



TEST NUMBER: P1427986

CATALOG NUMBER: SQ2W-PH1-K-150U-125D-L940-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	55	55	55	49
1	98	94	90	86	90	86	83	80	73	71	68	61	59	57	49	48	47	42
2	89	82	76	71	82	76	70	66	64	60	57	53	51	48	44	42	40	35
3	81	72	65	59	75	67	60	55	57	52	48	47	44	41	39	36	34	30
4	74	64	56	50	68	59	52	47	50	45	41	42	38	35	35	32	29	26
5	68	57	49	43	63	53	46	40	45	40	35	38	34	30	31	28	26	22
6	63	51	43	37	58	47	40	35	41	35	31	34	30	27	28	25	23	20
7	58	46	38	33	54	43	36	31	37	31	27	31	27	24	26	23	20	18
8	54	42	34	29	50	39	32	27	34	28	24	28	24	21	24	20	18	16
9	50	38	31	26	46	36	29	24	31	25	22	26	22	19	22	19	16	14
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	20	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	43348	43348	43348	43348
5°	43597	39622	43597	39622
10°	42593	36017	42593	36017
15°	42786	35312	42786	35312
20°	41259	35597	41259	35597
25°	40503	34769	40503	34769
30°	39624	35053	39624	35053
35°	39324	41086	39324	41086
40°	39358	32574	39358	32574
45°	39371	28055	39371	28055
50°	38820	26309	38820	26309
55°	38328	25241	38328	25241
60°	37945	23676	37945	23676
65°	37279	20592	37279	20592
70°	35211	14714	35211	14714
75°	31390	11154	31390	11154
80°	25653	10451	25653	10451
85°	16098	7095	16098	7095

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 39371 cd/sqm



TEST NUMBER: P1427986

CATALOG NUMBER: SQ2W-PH1-K-150U-125D-L940-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	236.3	2.0
10°-20°	621.4	5.1
20°-30°	911.1	7.5
30°-40°	1103.2	9.1
40°-50°	1084.8	9.0
50°-60°	943.6	7.8
60°-70°	656.3	5.4
70°-80°	311.2	2.6
80°-90°	77.3	0.6
90°-100°	167.6	1.4
100°-110°	488.9	4.0
110°-120°	797.8	6.6
120°-130°	1012.4	8.4
130°-140°	1083.3	9.0
140°-150°	1011.5	8.4
150°-160°	832.4	6.9
160°-170°	558.2	4.6
170°-180°	198.2	1.6
0°-30°	1768.7	14.6
0°-40°	2871.9	23.7
0°-60°	4900.3	40.5
0°-90°	5945.1	49.2
90°-120°	1454.3	12.0
90°-150°	4561.5	37.7
90°-180°	6150.0	50.8
0°-180°	12095.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2685	2685	2685	2685	2685	
5°	2690	2445	2690	2445	2690	253
15°	2560	2113	2560	2113	2560	714
25°	2274	1952	2274	1952	2274	1046
35°	1995	2084	1995	2084	1995	1250
45°	1724	1229	1724	1229	1724	1325
55°	1362	897	1362	897	1362	1216
65°	976	539	976	539	976	959
75°	503	179	503	179	503	533
85°	87	38	87	38	87	117
90°	6	47	6	92	6	8
95°	66	49	66	287	66	80
105°	311	498	311	685	311	330
115°	596	826	596	1017	596	587
125°	881	1308	881	1247	881	788
135°	1198	1713	1198	1381	1198	926
145°	1530	1974	1530	1411	1530	957
155°	1817	2145	1817	1464	1817	835
165°	2008	2236	2008	1685	2008	565
175°	2100	2189	2100	1977	2100	199
180°	2106	2106	2106	2106	2106	



TEST NUMBER: P1427986

CATALOG NUMBER: SQ2W-PH1-K-150U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8
2.5°	2678.7	2691.4	2704.1	2686.2	2658.1	2638.5	2627.6	2619.0	2617.2	2615.4	2617.2
5°	2690.0	2688.8	2687.7	2634.6	2564.2	2511.4	2476.2	2449.3	2447.0	2444.7	2447.0
7.5°	2640.9	2605.7	2570.5	2499.2	2415.9	2354.8	2316.0	2286.4	2284.6	2282.8	2284.6
10°	2598.0	2544.6	2491.3	2410.7	2321.0	2258.5	2223.3	2196.9	2196.9	2196.9	2196.9
12.5°	2587.8	2503.5	2419.3	2331.0	2241.3	2183.4	2157.2	2139.0	2144.5	2149.9	2144.5
15°	2559.7	2432.5	2305.4	2215.7	2138.5	2096.4	2089.6	2087.6	2100.1	2112.6	2100.1
17.5°	2466.7	2329.8	2192.8	2114.0	2054.5	2032.0	2046.5	2061.1	2075.6	2090.1	2075.6
20°	2401.3	2266.2	2131.1	2058.1	2005.9	1993.4	2020.7	2044.5	2058.1	2071.8	2058.1
22.5°	2346.1	2209.2	2072.3	2007.7	1967.3	1962.1	1992.0	2016.3	2023.6	2030.9	2023.6
25°	2273.6	2119.2	1964.7	1917.6	1906.3	1913.7	1939.8	1958.5	1955.1	1951.7	1955.1
27.5°	2186.7	2025.5	1864.3	1834.0	1847.4	1862.1	1877.9	1890.4	1892.4	1894.5	1892.4
30°	2125.4	1964.2	1803.0	1778.8	1800.4	1819.1	1835.0	1850.6	1865.4	1880.2	1865.4
32.5°	2066.1	1899.5	1732.8	1715.5	1747.9	1783.0	1820.7	1857.5	1891.3	1925.1	1891.3
35°	1995.1	1821.4	1647.7	1634.1	1673.8	1724.9	1787.3	1862.0	1973.3	2084.5	1973.3
37.5°	1920.5	1734.3	1548.1	1541.9	1595.8	1649.6	1703.4	1752.6	1788.0	1823.4	1788.0
40°	1867.4	1672.1	1476.8	1476.5	1541.3	1608.2	1677.5	1709.0	1627.3	1545.5	1627.3
42.5°	1810.2	1614.9	1419.6	1413.9	1471.3	1545.1	1635.3	1668.4	1530.3	1392.2	1530.3
45°	1724.3	1521.1	1317.9	1310.5	1368.4	1409.3	1433.1	1426.3	1327.5	1228.7	1327.5
47.5°	1623.2	1429.5	1235.8	1234.2	1296.6	1301.2	1247.8	1198.1	1159.5	1120.9	1159.5
50°	1545.5	1362.7	1179.9	1187.9	1259.4	1252.6	1167.4	1097.3	1072.3	1047.4	1072.3
52.5°	1469.9	1296.2	1122.5	1143.6	1229.7	1216.0	1102.7	1013.5	996.7	979.9	996.7
55°	1361.6	1194.7	1027.8	1075.5	1194.7	1176.5	1021.0	903.5	900.1	896.7	900.1
57.5°	1246.6	1088.8	931.0	964.1	1060.8	1041.8	906.9	807.2	813.1	819.0	813.1
60°	1175.1	1021.8	868.6	872.8	929.6	911.4	818.3	746.8	740.0	733.2	740.0
62.5°	1099.5	953.5	807.5	786.3	806.7	785.4	722.3	673.2	666.4	659.6	666.4
65°	975.8	843.0	710.2	670.1	661.1	630.4	578.2	539.0	539.0	539.0	539.0
67.5°	839.9	724.1	608.3	563.5	542.4	512.0	472.3	435.6	408.4	381.1	408.4
70°	745.9	643.8	541.6	494.7	466.4	430.0	385.7	348.0	329.8	311.7	329.8
72.5°	645.8	558.1	470.5	422.5	387.8	352.4	316.3	284.0	263.1	242.2	263.1
75°	503.2	432.9	362.5	315.9	277.3	241.5	208.6	183.4	181.1	178.8	181.1
77.5°	363.8	312.5	261.1	223.4	190.3	165.4	148.8	136.5	136.7	136.9	136.7
80°	275.9	237.3	198.7	163.5	129.4	111.8	110.7	110.1	111.3	112.4	111.3
82.5°	194.1	165.5	136.9	114.4	94.0	84.6	86.2	87.4	87.6	87.9	87.6
85°	86.9	73.2	59.6	54.5	52.2	48.8	44.3	40.6	39.5	38.3	39.5
87.5°	19.7	20.5	21.7	21.1	19.7	18.7	18.7	19.2	19.6	19.6	19.6
90°	6.4	14.9	25.5	34.0	40.4	42.6	42.6	44.7	46.8	46.8	46.8
92.5°	23.4	37.0	37.4	37.4	45.5	49.4	52.8	53.2	55.3	55.3	55.3
95°	66.0	72.3	108.5	106.4	72.3	57.4	48.9	48.9	48.9	48.9	48.9
97.5°	126.0	135.3	141.3	189.4	200.0	193.2	157.4	132.3	118.3	111.9	118.3
100°	178.7	183.0	195.7	197.9	251.1	302.1	276.6	244.7	234.0	227.7	234.0
102.5°	231.5	234.0	253.6	262.6	274.9	303.8	392.3	382.6	375.3	374.0	375.3
105°	310.6	312.8	348.9	366.0	374.5	374.5	372.3	414.9	483.0	497.9	483.0
107.5°	395.3	405.1	447.7	493.2	503.0	505.5	494.5	488.1	485.5	487.2	485.5
110°	453.2	468.1	519.2	576.6	591.5	595.8	591.5	585.1	580.9	580.9	580.9



TEST NUMBER: P1427986

CATALOG NUMBER: SQ2W-PH1-K-150U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	509.4	531.1	588.9	654.9	680.0	692.8	683.4	678.7	674.5	677.9	674.5
115°	595.8	627.7	704.3	772.3	823.4	829.8	827.7	827.7	825.5	825.5	825.5
117.5°	675.8	726.8	812.8	891.9	951.1	968.1	976.6	974.1	971.5	975.8	971.5
120°	731.9	791.5	889.4	978.7	1036.2	1061.7	1070.2	1066.0	1070.2	1066.0	1070.2
122.5°	791.5	864.7	960.9	1053.6	1121.3	1150.2	1160.4	1161.3	1162.1	1159.6	1162.1
125°	880.9	970.2	1083.0	1178.7	1248.9	1283.0	1291.5	1293.6	1297.9	1308.5	1297.9
127.5°	971.1	1072.4	1196.2	1288.5	1360.4	1401.7	1414.9	1419.6	1428.5	1433.2	1428.5
130°	1034.1	1148.9	1274.5	1361.7	1431.9	1476.6	1500.0	1506.4	1517.0	1514.9	1517.0
132.5°	1100.4	1220.4	1347.7	1438.3	1503.4	1551.5	1571.5	1589.8	1593.6	1596.6	1593.6
135°	1197.9	1327.7	1455.3	1544.7	1606.4	1653.2	1678.7	1695.8	1706.4	1712.8	1706.4
137.5°	1300.4	1437.5	1560.0	1639.6	1701.7	1742.1	1771.1	1789.0	1800.0	1805.1	1800.0
140°	1370.2	1502.1	1621.3	1704.3	1759.6	1800.0	1825.5	1846.8	1859.6	1859.6	1859.6
142.5°	1436.6	1566.8	1682.6	1765.5	1814.1	1851.1	1878.3	1894.5	1909.0	1909.0	1909.0
145°	1529.8	1659.6	1766.0	1849.0	1889.4	1923.4	1953.2	1966.0	1974.5	1974.5	1974.5
147.5°	1627.2	1742.1	1839.2	1918.7	1952.8	1992.8	2016.2	2026.4	2037.0	2032.4	2037.0
150°	1685.1	1791.5	1885.1	1959.6	1993.6	2031.9	2055.3	2063.8	2074.5	2068.1	2074.5
152.5°	1741.3	1842.6	1927.7	1997.0	2026.0	2064.3	2091.1	2099.6	2106.8	2102.1	2106.8
155°	1817.0	1906.4	1985.1	2049.0	2074.5	2110.7	2136.2	2146.8	2155.3	2144.7	2155.3
157.5°	1884.7	1961.7	2030.2	2089.0	2116.2	2147.3	2171.1	2184.3	2192.8	2188.1	2192.8
160°	1925.6	1995.8	2057.5	2112.8	2138.3	2166.0	2191.5	2206.4	2214.9	2208.5	2214.9
162.5°	1959.6	2023.0	2081.3	2131.5	2153.6	2177.9	2208.5	2221.7	2230.2	2222.1	2230.2
165°	2008.5	2059.6	2110.7	2153.2	2172.4	2191.5	2223.4	2238.3	2244.7	2236.2	2244.7
167.5°	2045.6	2084.7	2126.0	2162.6	2176.6	2195.3	2227.3	2239.6	2247.7	2237.0	2247.7
170°	2066.0	2100.0	2136.2	2166.0	2176.6	2193.6	2225.6	2236.2	2242.6	2231.9	2242.6
172.5°	2083.0	2108.5	2137.9	2164.3	2169.8	2183.4	2213.6	2224.3	2229.0	2220.0	2229.0
175°	2100.0	2114.9	2136.2	2153.2	2151.1	2159.6	2185.1	2193.6	2202.1	2189.4	2202.1
177.5°	2108.1	2114.9	2121.7	2131.9	2125.1	2125.1	2143.9	2149.0	2150.7	2143.9	2150.7
180°	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4



TEST NUMBER: P1427986

CATALOG NUMBER: SQ2W-PH1-K-150U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8
2.5°	2619.0	2627.6	2638.5	2658.1	2686.2	2704.1	2691.4	2678.7	2691.4	2704.1	2686.2
5°	2449.3	2476.2	2511.4	2564.2	2634.6	2687.7	2688.8	2690.0	2688.8	2687.7	2634.6
7.5°	2286.4	2316.0	2354.8	2415.9	2499.2	2570.5	2605.7	2640.9	2605.7	2570.5	2499.2
10°	2196.9	2223.3	2258.5	2321.0	2410.7	2491.3	2544.6	2598.0	2544.6	2491.3	2410.7
12.5°	2139.0	2157.2	2183.4	2241.3	2331.0	2419.3	2503.5	2587.8	2503.5	2419.3	2331.0
15°	2087.6	2089.6	2096.4	2138.5	2215.7	2305.4	2432.5	2559.7	2432.5	2305.4	2215.7
17.5°	2061.1	2046.5	2032.0	2054.5	2114.0	2192.8	2329.8	2466.7	2329.8	2192.8	2114.0
20°	2044.5	2020.7	1993.4	2005.9	2058.1	2131.1	2266.2	2401.3	2266.2	2131.1	2058.1
22.5°	2016.3	1992.0	1962.1	1967.3	2007.7	2072.3	2209.2	2346.1	2209.2	2072.3	2007.7
25°	1958.5	1939.8	1913.7	1906.3	1917.6	1964.7	2119.2	2273.6	2119.2	1964.7	1917.6
27.5°	1890.4	1877.9	1862.1	1847.4	1834.0	1864.3	2025.5	2186.7	2025.5	1864.3	1834.0
30°	1850.6	1835.0	1819.1	1800.4	1778.8	1803.0	1964.2	2125.4	1964.2	1803.0	1778.8
32.5°	1857.5	1820.7	1783.0	1747.9	1715.5	1732.8	1899.5	2066.1	1899.5	1732.8	1715.5
35°	1862.0	1787.3	1724.9	1673.8	1634.1	1647.7	1821.4	1995.1	1821.4	1647.7	1634.1
37.5°	1752.6	1703.4	1649.6	1595.8	1541.9	1548.1	1734.3	1920.5	1734.3	1548.1	1541.9
40°	1709.0	1677.5	1608.2	1541.3	1476.5	1476.8	1672.1	1867.4	1672.1	1476.8	1476.5
42.5°	1668.4	1635.3	1545.1	1471.3	1413.9	1419.6	1614.9	1810.2	1614.9	1419.6	1413.9
45°	1426.3	1433.1	1409.3	1368.4	1310.5	1317.9	1521.1	1724.3	1521.1	1317.9	1310.5
47.5°	1198.1	1247.8	1301.2	1296.6	1234.2	1235.8	1429.5	1623.2	1429.5	1235.8	1234.2
50°	1097.3	1167.4	1252.6	1259.4	1187.9	1179.9	1362.7	1545.5	1362.7	1179.9	1187.9
52.5°	1013.5	1102.7	1216.0	1229.7	1143.6	1122.5	1296.2	1469.9	1296.2	1122.5	1143.6
55°	903.5	1021.0	1176.5	1194.7	1075.5	1027.8	1194.7	1361.6	1194.7	1027.8	1075.5
57.5°	807.2	906.9	1041.8	1060.8	964.1	931.0	1088.8	1246.6	1088.8	931.0	964.1
60°	746.8	818.3	911.4	929.6	872.8	868.6	1021.8	1175.1	1021.8	868.6	872.8
62.5°	673.2	722.3	785.4	806.7	786.3	807.5	953.5	1099.5	953.5	807.5	786.3
65°	539.0	578.2	630.4	661.1	670.1	710.2	843.0	975.8	843.0	710.2	670.1
67.5°	435.6	472.3	512.0	542.4	563.5	608.3	724.1	839.9	724.1	608.3	563.5
70°	348.0	385.7	430.0	466.4	494.7	541.6	643.8	745.9	643.8	541.6	494.7
72.5°	284.0	316.3	352.4	387.8	422.5	470.5	558.1	645.8	558.1	470.5	422.5
75°	183.4	208.6	241.5	277.3	315.9	362.5	432.9	503.2	432.9	362.5	315.9
77.5°	136.5	148.8	165.4	190.3	223.4	261.1	312.5	363.8	312.5	261.1	223.4
80°	110.1	110.7	111.8	129.4	163.5	198.7	237.3	275.9	237.3	198.7	163.5
82.5°	87.4	86.2	84.6	94.0	114.4	136.9	165.5	194.1	165.5	136.9	114.4
85°	40.6	44.3	48.8	52.2	54.5	59.6	73.2	86.9	73.2	59.6	54.5
87.5°	19.2	18.7	18.7	19.7	21.1	21.7	20.5	19.7	20.5	21.3	22.0
90°	44.7	42.6	42.6	40.4	34.0	25.5	14.9	6.4	14.9	23.4	38.3
92.5°	53.2	52.8	49.4	45.5	37.4	37.4	37.0	23.4	40.4	57.4	82.6
95°	48.9	48.9	57.4	72.3	106.4	108.5	72.3	66.0	93.6	131.9	166.0
97.5°	132.3	157.4	193.2	200.0	189.4	141.3	135.3	126.0	171.5	209.4	264.3
100°	244.7	276.6	302.1	251.1	197.9	195.7	183.0	178.7	227.7	263.8	317.0
102.5°	382.6	392.3	303.8	274.9	262.6	253.6	234.0	231.5	280.4	330.2	374.9
105°	414.9	372.3	374.5	374.5	366.0	348.9	312.8	310.6	366.0	423.4	478.7
107.5°	488.1	494.5	505.5	503.0	493.2	447.7	405.1	395.3	445.1	514.0	574.9
110°	585.1	591.5	595.8	591.5	576.6	519.2	468.1	453.2	497.9	570.2	636.2



TEST NUMBER: P1427986

CATALOG NUMBER: SQ2W-PH1-K-150U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	678.7	683.4	692.8	680.0	654.9	588.9	531.1	509.4	554.0	628.1	695.8
115°	827.7	827.7	829.8	823.4	772.3	704.3	627.7	595.8	634.0	702.1	776.6
117.5°	974.1	976.6	968.1	951.1	891.9	812.8	726.8	675.8	706.0	777.9	854.5
120°	1066.0	1070.2	1061.7	1036.2	978.7	889.4	791.5	731.9	755.3	825.5	902.1
122.5°	1161.3	1160.4	1150.2	1121.3	1053.6	960.9	864.7	791.5	801.3	866.4	941.3
125°	1293.6	1291.5	1283.0	1248.9	1178.7	1083.0	970.2	880.9	868.1	923.4	1000.0
127.5°	1419.6	1414.9	1401.7	1360.4	1288.5	1196.2	1072.4	971.1	942.6	977.5	1047.7
130°	1506.4	1500.0	1476.6	1431.9	1361.7	1274.5	1148.9	1034.1	993.6	1014.9	1076.6
132.5°	1589.8	1571.5	1551.5	1503.4	1438.3	1347.7	1220.4	1100.4	1044.7	1054.1	1102.1
135°	1695.8	1678.7	1653.2	1606.4	1544.7	1455.3	1327.7	1197.9	1121.3	1112.8	1140.4
137.5°	1789.0	1771.1	1742.1	1701.7	1639.6	1560.0	1437.5	1300.4	1203.8	1175.3	1186.0
140°	1846.8	1825.5	1800.0	1759.6	1704.3	1621.3	1502.1	1370.2	1261.7	1221.3	1214.9
142.5°	1894.5	1878.3	1851.1	1814.1	1765.5	1682.6	1566.8	1436.6	1321.3	1268.9	1254.1
145°	1966.0	1953.2	1923.4	1889.4	1849.0	1766.0	1659.6	1529.8	1414.9	1346.8	1314.9
147.5°	2026.4	2016.2	1992.8	1952.8	1918.7	1839.2	1742.1	1627.2	1509.4	1425.1	1383.8
150°	2063.8	2055.3	2031.9	1993.6	1959.6	1885.1	1791.5	1685.1	1572.4	1483.0	1429.8
152.5°	2099.6	2091.1	2064.3	2026.0	1997.0	1927.7	1842.6	1741.3	1626.8	1537.5	1482.6
155°	2146.8	2136.2	2110.7	2074.5	2049.0	1985.1	1906.4	1817.0	1719.2	1625.5	1563.8
157.5°	2184.3	2171.1	2147.3	2116.2	2089.0	2030.2	1961.7	1884.7	1799.2	1709.8	1646.8
160°	2206.4	2191.5	2166.0	2138.3	2112.8	2057.5	1995.8	1925.6	1846.8	1766.0	1697.9
162.5°	2221.7	2208.5	2177.9	2153.6	2131.5	2081.3	2023.0	1959.6	1889.4	1818.7	1755.8
165°	2238.3	2223.4	2191.5	2172.4	2153.2	2110.7	2059.6	2008.5	1949.0	1891.5	1840.4
167.5°	2239.6	2227.3	2195.3	2176.6	2162.6	2126.0	2084.7	2045.6	1999.2	1954.1	1911.5
170°	2236.2	2225.6	2193.6	2176.6	2166.0	2136.2	2100.0	2066.0	2029.8	1991.5	1957.5
172.5°	2224.3	2213.6	2183.4	2169.8	2164.3	2137.9	2108.5	2083.0	2051.9	2023.8	1996.6
175°	2193.6	2185.1	2159.6	2151.1	2153.2	2136.2	2114.9	2100.0	2080.9	2063.8	2049.0
177.5°	2149.0	2143.9	2125.1	2125.1	2131.9	2121.7	2114.9	2108.1	2099.6	2094.5	2089.4
180°	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4



TEST NUMBER: P1427986

CATALOG NUMBER: SQ2W-PH1-K-150U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8	2684.8
2.5°	2658.1	2638.5	2627.6	2619.0	2617.2	2615.4	2617.2	2619.0	2627.6	2638.5	2658.1
5°	2564.2	2511.4	2476.2	2449.3	2447.0	2444.7	2447.0	2449.3	2476.2	2511.4	2564.2
7.5°	2415.9	2354.8	2316.0	2286.4	2284.6	2282.8	2284.6	2286.4	2316.0	2354.8	2415.9
10°	2321.0	2258.5	2223.3	2196.9	2196.9	2196.9	2196.9	2196.9	2223.3	2258.5	2321.0
12.5°	2241.3	2183.4	2157.2	2139.0	2144.5	2149.9	2144.5	2139.0	2157.2	2183.4	2241.3
15°	2138.5	2096.4	2089.6	2087.6	2100.1	2112.6	2100.1	2087.6	2089.6	2096.4	2138.5
17.5°	2054.5	2032.0	2046.5	2061.1	2075.6	2090.1	2075.6	2061.1	2046.5	2032.0	2054.5
20°	2005.9	1993.4	2020.7	2044.5	2058.1	2071.8	2058.1	2044.5	2020.7	1993.4	2005.9
22.5°	1967.3	1962.1	1992.0	2016.3	2023.6	2030.9	2023.6	2016.3	1992.0	1962.1	1967.3
25°	1906.3	1913.7	1939.8	1958.5	1955.1	1951.7	1955.1	1958.5	1939.8	1913.7	1906.3
27.5°	1847.4	1862.1	1877.9	1890.4	1892.4	1894.5	1892.4	1890.4	1877.9	1862.1	1847.4
30°	1800.4	1819.1	1835.0	1850.6	1865.4	1880.2	1865.4	1850.6	1835.0	1819.1	1800.4
32.5°	1747.9	1783.0	1820.7	1857.5	1891.3	1925.1	1891.3	1857.5	1820.7	1783.0	1747.9
35°	1673.8	1724.9	1787.3	1862.0	1973.3	2084.5	1973.3	1862.0	1787.3	1724.9	1673.8
37.5°	1595.8	1649.6	1703.4	1752.6	1788.0	1823.4	1788.0	1752.6	1703.4	1649.6	1595.8
40°	1541.3	1608.2	1677.5	1709.0	1627.3	1545.5	1627.3	1709.0	1677.5	1608.2	1541.3
42.5°	1471.3	1545.1	1635.3	1668.4	1530.3	1392.2	1530.3	1668.4	1635.3	1545.1	1471.3
45°	1368.4	1409.3	1433.1	1426.3	1327.5	1228.7	1327.5	1426.3	1433.1	1409.3	1368.4
47.5°	1296.6	1301.2	1247.8	1198.1	1159.5	1120.9	1159.5	1198.1	1247.8	1301.2	1296.6
50°	1259.4	1252.6	1167.4	1097.3	1072.3	1047.4	1072.3	1097.3	1167.4	1252.6	1259.4
52.5°	1229.7	1216.0	1102.7	1013.5	996.7	979.9	996.7	1013.5	1102.7	1216.0	1229.7
55°	1194.7	1176.5	1021.0	903.5	900.1	896.7	900.1	903.5	1021.0	1176.5	1194.7
57.5°	1060.8	1041.8	906.9	807.2	813.1	819.0	813.1	807.2	906.9	1041.8	1060.8
60°	929.6	911.4	818.3	746.8	740.0	733.2	740.0	746.8	818.3	911.4	929.6
62.5°	806.7	785.4	722.3	673.2	666.4	659.6	666.4	673.2	722.3	785.4	806.7
65°	661.1	630.4	578.2	539.0	539.0	539.0	539.0	578.2	630.4	661.1	
67.5°	542.4	512.0	472.3	435.6	408.4	381.1	408.4	435.6	472.3	512.0	542.4
70°	466.4	430.0	385.7	348.0	329.8	311.7	329.8	348.0	385.7	430.0	466.4
72.5°	387.8	352.4	316.3	284.0	263.1	242.2	263.1	284.0	316.3	352.4	387.8
75°	277.3	241.5	208.6	183.4	181.1	178.8	181.1	183.4	208.6	241.5	277.3
77.5°	190.3	165.4	148.8	136.5	136.7	136.9	136.7	136.5	148.8	165.4	190.3
80°	129.4	111.8	110.7	110.1	111.3	112.4	111.3	110.1	110.7	111.8	129.4
82.5°	94.0	84.6	86.2	87.4	87.6	87.9	87.6	87.4	86.2	84.6	94.0
85°	52.2	48.8	44.3	40.6	39.5	38.3	39.5	40.6	44.3	48.8	52.2
87.5°	21.4	23.0	26.0	27.7	29.4	28.5	29.4	27.7	26.0	23.0	21.4
90°	48.9	63.8	78.7	87.2	95.7	91.5	95.7	87.2	78.7	63.8	48.9
92.5°	98.3	123.4	141.7	157.0	163.8	163.0	163.8	157.0	141.7	123.4	98.3
95°	197.9	227.7	257.4	278.7	291.5	287.2	291.5	278.7	257.4	227.7	197.9
97.5°	305.1	345.1	378.3	398.3	411.1	419.6	411.1	398.3	378.3	345.1	305.1
100°	376.6	414.9	453.2	476.6	497.9	506.4	497.9	476.6	453.2	414.9	376.6
102.5°	434.5	484.7	526.4	551.5	569.4	577.9	569.4	551.5	526.4	484.7	434.5
105°	529.8	583.0	627.7	659.6	678.7	685.1	678.7	659.6	627.7	583.0	529.8
107.5°	625.1	680.0	721.3	756.6	780.0	793.6	780.0	756.6	721.3	680.0	625.1
110°	700.0	744.7	789.4	821.3	844.7	853.2	844.7	821.3	789.4	744.7	700.0



TEST NUMBER: P1427986

CATALOG NUMBER: SQ2W-PH1-K-150U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	763.0	812.8	857.5	889.4	916.2	928.1	916.2	889.4	857.5	812.8	763.0
115°	851.1	917.0	957.5	987.2	1006.4	1017.0	1006.4	987.2	957.5	917.0	851.1
117.5°	924.3	993.2	1037.5	1060.4	1069.4	1077.0	1069.4	1060.4	1037.5	993.2	924.3
120°	970.2	1034.1	1085.1	1114.9	1125.5	1129.8	1125.5	1114.9	1085.1	1034.1	970.2
122.5°	1012.8	1073.2	1122.6	1159.2	1176.6	1180.9	1176.6	1159.2	1122.6	1073.2	1012.8
125°	1072.4	1129.8	1180.9	1217.0	1236.2	1246.8	1236.2	1217.0	1180.9	1129.8	1072.4
127.5°	1124.3	1186.4	1233.2	1266.0	1284.7	1293.2	1284.7	1266.0	1233.2	1186.4	1124.3
130°	1153.2	1217.0	1263.8	1300.0	1317.0	1325.5	1317.0	1300.0	1263.8	1217.0	1153.2
132.5°	1175.3	1242.6	1291.1	1323.8	1342.6	1351.1	1342.6	1323.8	1291.1	1242.6	1175.3
135°	1202.1	1272.4	1323.4	1355.3	1372.4	1380.9	1372.4	1355.3	1323.4	1272.4	1202.1
137.5°	1225.5	1289.4	1342.6	1376.2	1391.5	1397.0	1391.5	1376.2	1342.6	1289.4	1225.5
140°	1242.6	1297.9	1351.1	1383.0	1400.0	1402.1	1400.0	1383.0	1351.1	1297.9	1242.6
142.5°	1264.7	1308.1	1354.5	1386.4	1403.4	1407.2	1403.4	1386.4	1354.5	1308.1	1264.7
145°	1304.3	1329.8	1361.7	1391.5	1406.4	1410.7	1406.4	1391.5	1361.7	1329.8	1304.3
147.5°	1354.1	1362.1	1378.7	1398.3	1412.8	1415.8	1412.8	1398.3	1378.7	1362.1	1354.1
150°	1391.5	1389.4	1395.8	1408.5	1421.3	1419.2	1421.3	1408.5	1395.8	1389.4	1391.5
152.5°	1434.1	1421.7	1421.3	1427.2	1433.2	1432.8	1433.2	1427.2	1421.3	1421.7	1434.1
155°	1506.4	1483.0	1470.2	1466.0	1466.0	1463.8	1466.0	1466.0	1470.2	1483.0	1506.4
157.5°	1586.0	1553.2	1534.1	1523.8	1520.9	1516.2	1520.9	1523.8	1534.1	1553.2	1586.0
160°	1640.4	1604.3	1585.1	1568.1	1561.7	1555.3	1561.7	1568.1	1585.1	1604.3	1640.4
162.5°	1691.5	1657.0	1636.2	1620.9	1614.5	1604.7	1614.5	1620.9	1636.2	1657.0	1691.5
165°	1774.5	1738.3	1714.9	1702.1	1693.6	1685.1	1693.6	1702.1	1714.9	1738.3	1774.5
167.5°	1857.5	1817.9	1802.6	1788.1	1780.0	1764.7	1780.0	1788.1	1802.6	1817.9	1857.5
170°	1908.5	1872.4	1863.8	1851.1	1836.2	1819.2	1836.2	1851.1	1863.8	1872.4	1908.5
172.5°	1952.8	1928.5	1920.0	1907.3	1902.6	1889.0	1902.6	1907.3	1920.0	1928.5	1952.8
175°	2017.0	1997.9	1997.9	1995.8	1989.4	1976.6	1989.4	1995.8	1997.9	1997.9	2017.0
177.5°	2070.7	2060.4	2067.3	2067.3	2065.6	2053.6	2065.6	2067.3	2067.3	2060.4	2070.7
180°	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4



TEST NUMBER: P1427986

CATALOG NUMBER: SQ2W-PH1-K-150U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	2684.8	2684.8	2684.8	2684.8
2.5°	2686.2	2704.1	2691.4	2678.7
5°	2634.6	2687.7	2688.8	2690.0
7.5°	2499.2	2570.5	2605.7	2640.9
10°	2410.7	2491.3	2544.6	2598.0
12.5°	2331.0	2419.3	2503.5	2587.8
15°	2215.7	2305.4	2432.5	2559.7
17.5°	2114.0	2192.8	2329.8	2466.7
20°	2058.1	2131.1	2266.2	2401.3
22.5°	2007.7	2072.3	2209.2	2346.1
25°	1917.6	1964.7	2119.2	2273.6
27.5°	1834.0	1864.3	2025.5	2186.7
30°	1778.8	1803.0	1964.2	2125.4
32.5°	1715.5	1732.8	1899.5	2066.1
35°	1634.1	1647.7	1821.4	1995.1
37.5°	1541.9	1548.1	1734.3	1920.5
40°	1476.5	1476.8	1672.1	1867.4
42.5°	1413.9	1419.6	1614.9	1810.2
45°	1310.5	1317.9	1521.1	1724.3
47.5°	1234.2	1235.8	1429.5	1623.2
50°	1187.9	1179.9	1362.7	1545.5
52.5°	1143.6	1122.5	1296.2	1469.9
55°	1075.5	1027.8	1194.7	1361.6
57.5°	964.1	931.0	1088.8	1246.6
60°	872.8	868.6	1021.8	1175.1
62.5°	786.3	807.5	953.5	1099.5
65°	670.1	710.2	843.0	975.8
67.5°	563.5	608.3	724.1	839.9
70°	494.7	541.6	643.8	745.9
72.5°	422.5	470.5	558.1	645.8
75°	315.9	362.5	432.9	503.2
77.5°	223.4	261.1	312.5	363.8
80°	163.5	198.7	237.3	275.9
82.5°	114.4	136.9	165.5	194.1
85°	54.5	59.6	73.2	86.9
87.5°	22.0	21.3	20.5	19.7
90°	38.3	23.4	14.9	6.4
92.5°	82.6	57.4	40.4	23.4
95°	166.0	131.9	93.6	66.0
97.5°	264.3	209.4	171.5	126.0
100°	317.0	263.8	227.7	178.7
102.5°	374.9	330.2	280.4	231.5
105°	478.7	423.4	366.0	310.6
107.5°	574.9	514.0	445.1	395.3
110°	636.2	570.2	497.9	453.2



TEST NUMBER: P1427986

CATALOG NUMBER: SQ2W-PH1-K-150U-125D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	695.8	628.1	554.0	509.4
115°	776.6	702.1	634.0	595.8
117.5°	854.5	777.9	706.0	675.8
120°	902.1	825.5	755.3	731.9
122.5°	941.3	866.4	801.3	791.5
125°	1000.0	923.4	868.1	880.9
127.5°	1047.7	977.5	942.6	971.1
130°	1076.6	1014.9	993.6	1034.1
132.5°	1102.1	1054.1	1044.7	1100.4
135°	1140.4	1112.8	1121.3	1197.9
137.5°	1186.0	1175.3	1203.8	1300.4
140°	1214.9	1221.3	1261.7	1370.2
142.5°	1254.1	1268.9	1321.3	1436.6
145°	1314.9	1346.8	1414.9	1529.8
147.5°	1383.8	1425.1	1509.4	1627.2
150°	1429.8	1483.0	1572.4	1685.1
152.5°	1482.6	1537.5	1626.8	1741.3
155°	1563.8	1625.5	1719.2	1817.0
157.5°	1646.8	1709.8	1799.2	1884.7
160°	1697.9	1766.0	1846.8	1925.6
162.5°	1755.8	1818.7	1889.4	1959.6
165°	1840.4	1891.5	1949.0	2008.5
167.5°	1911.5	1954.1	1999.2	2045.6
170°	1957.5	1991.5	2029.8	2066.0
172.5°	1996.6	2023.8	2051.9	2083.0
175°	2049.0	2063.8	2080.9	2100.0
177.5°	2089.4	2094.5	2099.6	2108.1
180°	2106.4	2106.4	2106.4	2106.4



TEST NUMBER: P1427986
 CATALOG NUMBER: SQ2W-PH1-K-150U-125D-L940-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	19.89	20.74	20.86	21.72	23.00	18.72	19.57	19.69	20.55	21.83
	3H	22.07	22.82	23.04	23.81	25.12	19.77	20.53	20.75	21.52	22.82
	4H	22.88	23.60	23.87	24.59	25.90	20.01	20.73	21.00	21.72	23.04
	6H	23.34	24.00	24.35	25.00	26.33	20.15	20.81	21.16	21.81	23.14
	8H	23.50	24.12	24.50	25.14	26.46	20.21	20.84	21.22	21.85	23.18
	12H	23.55	24.15	24.57	25.16	26.51	20.22	20.82	21.24	21.83	23.18
4H	2H	20.33	21.04	21.32	22.03	23.35	19.40	20.12	20.40	21.11	22.43
	3H	22.58	23.17	23.58	24.19	25.52	20.63	21.23	21.64	22.25	23.58
	4H	23.45	23.99	24.46	25.01	26.36	20.92	21.47	21.94	22.48	23.83
	6H	24.01	24.48	25.03	25.51	26.86	21.12	21.59	22.14	22.63	23.97
	8H	24.21	24.65	25.23	25.68	27.04	21.21	21.65	22.24	22.68	24.04
	12H	24.29	24.69	25.34	25.73	27.10	21.23	21.63	22.28	22.67	24.04
8H	4H	23.47	23.91	24.50	24.94	26.30	21.15	21.59	22.18	22.62	23.98
	6H	24.10	24.46	25.15	25.53	26.89	21.42	21.78	22.47	22.85	24.21
	8H	24.36	24.68	25.42	25.74	27.12	21.56	21.88	22.62	22.94	24.32
	12H	24.49	24.77	25.55	25.82	27.25	21.63	21.91	22.69	22.96	24.38
12H	4H	23.42	23.82	24.47	24.86	26.23	21.15	21.54	22.19	22.59	23.95
	6H	24.07	24.39	25.13	25.45	26.83	21.45	21.77	22.51	22.83	24.21
	8H	24.35	24.62	25.41	25.68	27.10	21.61	21.89	22.68	22.94	24.37