

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427992

Luminaire Tested: SQ2W-PP3-0U-050D-L940-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1427992
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-7)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PP3-0U-050D-L940-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE PRISM LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT N/A - DIRECT ONLY
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2520.1 lumens
Efficiency: N/A
Efficacy: 141.6 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.41 / 1.4
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 17.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427992

CATALOG NUMBER: SQ2W-PP3-0U-050D-L940-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

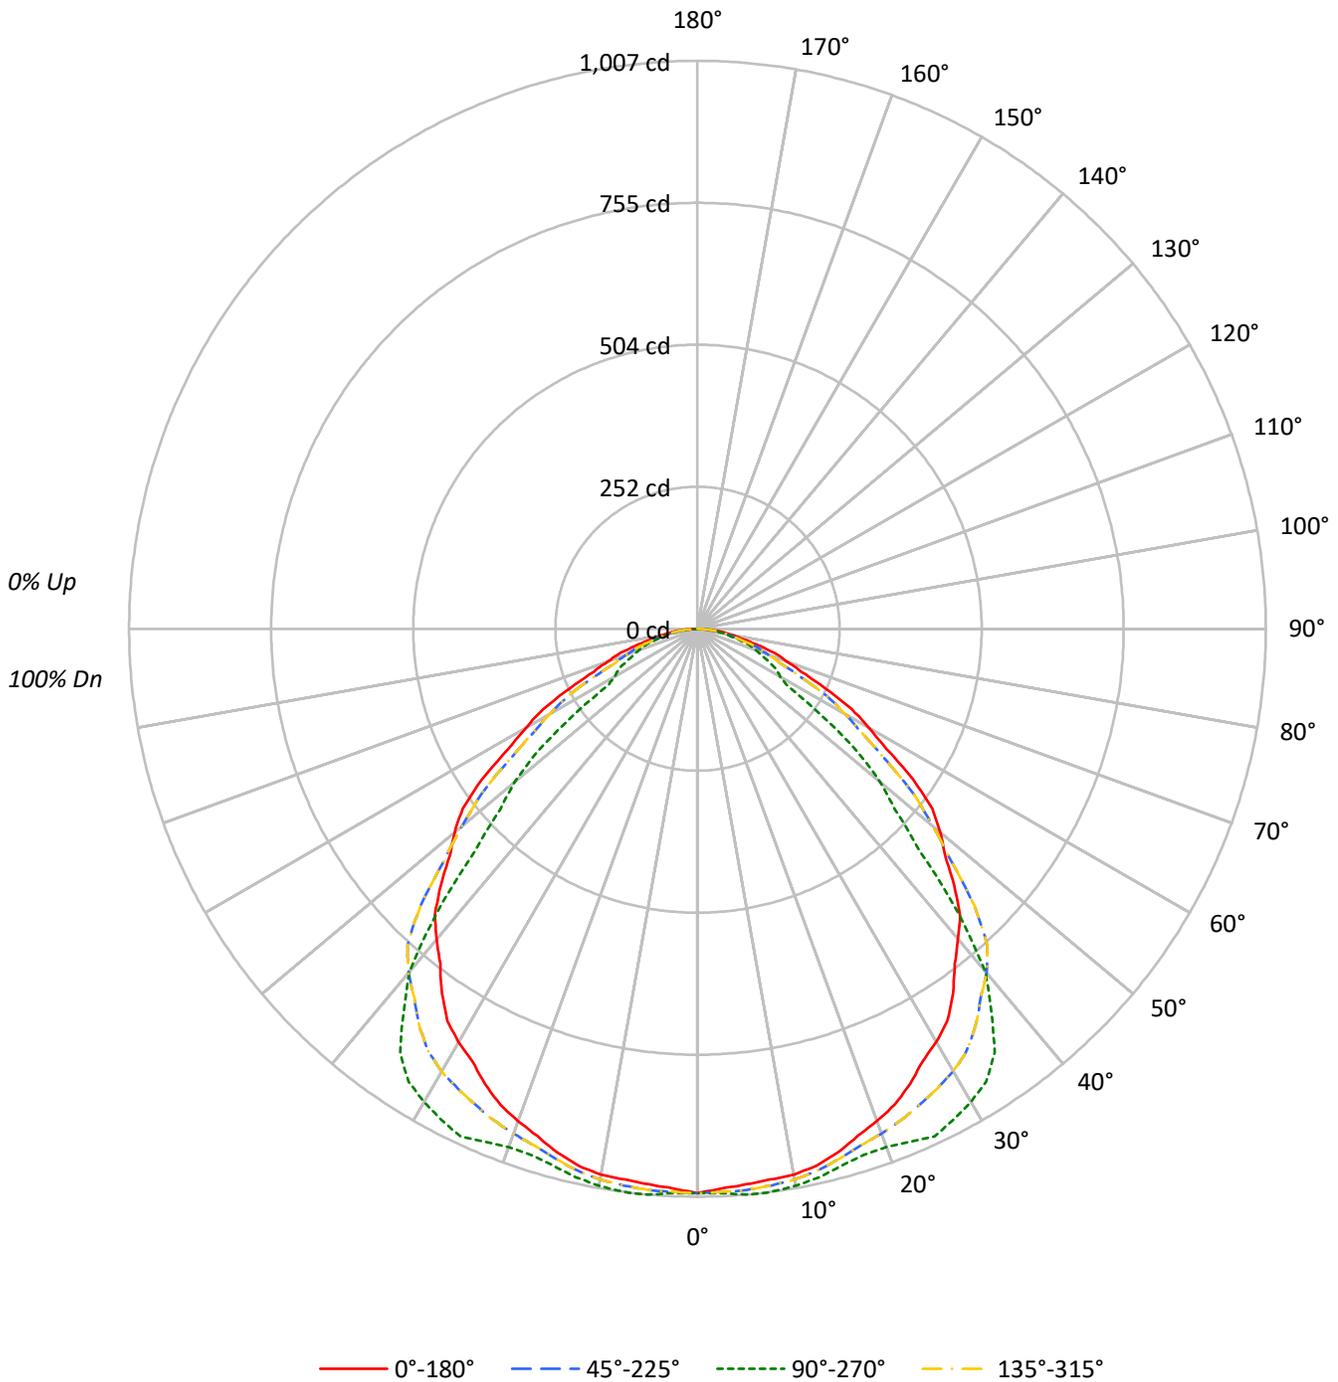



TEST NUMBER: P1427992

CATALOG NUMBER: SQ2W-PP3-0U-050D-L940-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	89	87				87
2	101	94	88	82	99	92	86	81	88	84	80	85	81	78	82	79	76	74				74
3	93	83	76	70	91	82	75	69	79	73	68	76	71	67	74	69	66	64				64
4	86	74	66	60	83	73	66	60	71	64	59	68	63	58	66	61	57	55				55
5	79	67	59	52	77	66	58	52	64	57	52	62	56	51	60	55	50	48				48
6	73	61	52	46	71	60	52	46	58	51	46	56	50	45	55	49	45	43				43
7	68	55	47	41	66	54	46	41	53	46	41	51	45	40	50	44	40	38				38
8	63	50	42	37	62	50	42	37	48	41	36	47	41	36	46	40	36	34				34
9	59	46	38	33	58	46	38	33	45	38	33	44	37	33	43	37	33	31				31
10	56	43	35	30	54	42	35	30	41	35	30	40	34	30	40	34	30	28				28

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	16157	16157	16157	16157
5°	16029	16321	16029	16321
10°	16111	16441	16111	16441
15°	16072	16478	16072	16478
20°	15957	16811	15957	16811
25°	15866	17695	15866	17695
30°	15776	18063	15776	18063
35°	15553	18096	15553	18096
40°	15137	16720	15137	16720
45°	14684	12727	14684	12727
50°	14109	10602	14109	10602
55°	13131	7623	13131	7623
60°	11305	5464	11305	5464
65°	9536	5375	9536	5375
70°	7940	5146	7940	5146
75°	6731	4816	6731	4816
80°	5709	4324	5709	4324
85°	4502	2353	4502	2353

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 16063 cd/sqm



TEST NUMBER: P1427992

CATALOG NUMBER: SQ2W-PP3-0U-050D-L940-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	95.3	3.8
10°-20°	275.8	10.9
20°-30°	432.0	17.1
30°-40°	532.9	21.1
40°-50°	501.7	19.9
50°-60°	355.3	14.1
60°-70°	202.4	8.0
70°-80°	100.2	4.0
80°-90°	24.5	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	803.1	31.9
0°-40°	1336.0	53.0
0°-60°	2193.0	87.0
0°-90°	2520.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2520.1	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1001	1001	1001	1001	1001	
5°	989	1007	989	1007	989	94
15°	962	986	962	986	962	271
25°	891	993	891	993	891	410
35°	789	918	789	918	789	492
45°	643	557	643	557	643	495
55°	466	271	466	271	466	412
65°	250	141	250	141	250	251
75°	108	77	108	77	108	117
85°	24	13	24	13	24	30
90°	0	0	0	0	0	



TEST NUMBER: P1427992

CATALOG NUMBER: SQ2W-PP3-OU-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7
2.5°	993.0	999.4	1005.8	1004.3	1000.2	998.5	999.2	1000.0	1000.7	1001.5	1000.7
5°	989.0	997.0	1005.0	1003.8	999.6	998.0	998.9	1000.4	1003.7	1007.0	1003.7
7.5°	985.2	993.4	1001.6	1000.5	996.4	995.1	996.7	998.9	1003.0	1007.0	1003.0
10°	982.7	989.7	996.8	995.7	992.0	991.3	993.6	996.2	999.5	1002.8	999.5
12.5°	975.1	981.7	988.4	987.5	984.2	984.0	987.1	990.2	993.1	996.0	993.1
15°	961.5	967.6	973.7	973.9	972.0	973.2	977.4	981.1	983.5	985.8	983.5
17.5°	943.1	950.5	958.0	959.7	959.5	962.4	968.4	973.6	976.0	978.4	976.0
20°	928.7	937.7	946.6	949.5	950.5	954.7	962.2	969.0	973.7	978.4	973.7
22.5°	913.5	923.9	934.4	938.2	939.9	946.4	957.7	968.2	976.3	984.4	976.3
25°	890.6	901.0	911.3	918.9	925.4	937.0	953.4	968.8	981.0	993.3	981.0
27.5°	864.0	874.2	884.5	897.4	911.2	927.4	945.9	962.2	971.9	981.6	971.9
30°	846.2	856.1	866.0	880.8	897.2	915.1	934.4	951.1	960.0	968.9	960.0
32.5°	824.2	834.5	844.7	860.5	878.0	897.2	918.0	935.6	943.8	952.0	943.8
35°	789.1	799.0	808.8	827.2	848.3	869.7	891.4	908.7	913.4	918.1	913.4
37.5°	748.7	759.9	771.1	791.6	815.3	833.2	845.4	854.5	854.8	855.1	854.8
40°	718.2	732.8	747.4	767.9	790.5	803.0	805.3	805.6	799.4	793.3	799.4
42.5°	688.6	707.3	726.0	742.6	758.4	761.6	752.3	738.5	711.3	684.2	711.3
45°	643.1	665.2	687.3	697.4	703.5	682.9	635.4	595.1	576.3	557.4	576.3
47.5°	594.7	616.5	638.3	635.5	624.5	593.2	541.6	499.6	486.6	473.7	486.6
50°	561.7	582.4	603.0	588.1	561.3	526.1	482.3	446.5	434.3	422.1	434.3
52.5°	524.4	542.9	561.3	538.8	502.6	465.4	427.3	394.1	375.5	356.9	375.5
55°	466.5	479.2	491.9	467.2	430.0	389.1	344.5	306.5	288.7	270.8	288.7
57.5°	396.7	405.6	414.5	395.1	366.2	325.6	273.1	228.8	208.7	188.7	208.7
60°	350.1	357.2	364.2	346.6	320.7	282.0	230.2	189.0	179.1	169.2	179.1
62.5°	307.8	314.1	320.4	302.0	275.4	240.8	198.1	165.2	161.7	158.2	161.7
65°	249.6	255.7	261.9	242.6	214.8	187.8	161.5	141.6	141.2	140.7	141.2
67.5°	198.7	205.3	212.0	193.9	167.4	147.5	133.9	123.6	123.1	122.5	123.1
70°	168.2	175.2	182.3	165.4	140.4	124.2	116.7	110.8	109.9	109.0	109.9
72.5°	142.8	149.5	156.2	141.4	119.5	106.1	101.2	97.4	96.8	96.3	96.8
75°	107.9	113.1	118.2	107.5	91.6	82.4	80.0	78.2	77.7	77.2	77.7
77.5°	78.3	81.6	84.9	77.9	67.4	61.6	60.4	59.3	58.9	58.4	58.9
80°	61.4	62.8	64.2	59.2	52.2	48.4	48.0	47.5	47.0	46.5	47.0
82.5°	46.1	45.6	45.2	42.3	38.6	36.6	36.1	35.5	34.7	33.8	34.7
85°	24.3	23.4	22.4	21.5	20.6	19.2	17.3	15.5	14.1	12.7	14.1
87.5°	7.6	7.6	7.6	6.2	4.3	3.2	2.8	2.5	2.5	2.5	2.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1427992

CATALOG NUMBER: SQ2W-PP3-OU-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7
2.5°	1000.0	999.2	998.5	1000.2	1004.3	1005.8	999.4	993.0	999.4	1005.8	1004.3
5°	1000.4	998.9	998.0	999.6	1003.8	1005.0	997.0	989.0	997.0	1005.0	1003.8
7.5°	998.9	996.7	995.1	996.4	1000.5	1001.6	993.4	985.2	993.4	1001.6	1000.5
10°	996.2	993.6	991.3	992.0	995.7	996.8	989.7	982.7	989.7	996.8	995.7
12.5°	990.2	987.1	984.0	984.2	987.5	988.4	981.7	975.1	981.7	988.4	987.5
15°	981.1	977.4	973.2	972.0	973.9	973.7	967.6	961.5	967.6	973.7	973.9
17.5°	973.6	968.4	962.4	959.5	959.7	958.0	950.5	943.1	950.5	958.0	959.7
20°	969.0	962.2	954.7	950.5	949.5	946.6	937.7	928.7	937.7	946.6	949.5
22.5°	968.2	957.7	946.4	939.9	938.2	934.4	923.9	913.5	923.9	934.4	938.2
25°	968.8	953.4	937.0	925.4	918.9	911.3	901.0	890.6	901.0	911.3	918.9
27.5°	962.2	945.9	927.4	911.2	897.4	884.5	874.2	864.0	874.2	884.5	897.4
30°	951.1	934.4	915.1	897.2	880.8	866.0	856.1	846.2	856.1	866.0	880.8
32.5°	935.6	918.0	897.2	878.0	860.5	844.7	834.5	824.2	834.5	844.7	860.5
35°	908.7	891.4	869.7	848.3	827.2	808.8	799.0	789.1	799.0	808.8	827.2
37.5°	854.5	845.4	833.2	815.3	791.6	771.1	759.9	748.7	759.9	771.1	791.6
40°	805.6	805.3	803.0	790.5	767.9	747.4	732.8	718.2	732.8	747.4	767.9
42.5°	738.5	752.3	761.6	758.4	742.6	726.0	707.3	688.6	707.3	726.0	742.6
45°	595.1	635.4	682.9	703.5	697.4	687.3	665.2	643.1	665.2	687.3	697.4
47.5°	499.6	541.6	593.2	624.5	635.5	638.3	616.5	594.7	616.5	638.3	635.5
50°	446.5	482.3	526.1	561.3	588.1	603.0	582.4	561.7	582.4	603.0	588.1
52.5°	394.1	427.3	465.4	502.6	538.8	561.3	542.9	524.4	542.9	561.3	538.8
55°	306.5	344.5	389.1	430.0	467.2	491.9	479.2	466.5	479.2	491.9	467.2
57.5°	228.8	273.1	325.6	366.2	395.1	414.5	405.6	396.7	405.6	414.5	395.1
60°	189.0	230.2	282.0	320.7	346.6	364.2	357.2	350.1	357.2	364.2	346.6
62.5°	165.2	198.1	240.8	275.4	302.0	320.4	314.1	307.8	314.1	320.4	302.0
65°	141.6	161.5	187.8	214.8	242.6	261.9	255.7	249.6	255.7	261.9	242.6
67.5°	123.6	133.9	147.5	167.4	193.9	212.0	205.3	198.7	205.3	212.0	193.9
70°	110.8	116.7	124.2	140.4	165.4	182.3	175.2	168.2	175.2	182.3	165.4
72.5°	97.4	101.2	106.1	119.5	141.4	156.2	149.5	142.8	149.5	156.2	141.4
75°	78.2	80.0	82.4	91.6	107.5	118.2	113.1	107.9	113.1	118.2	107.5
77.5°	59.3	60.4	61.6	67.4	77.9	84.9	81.6	78.3	81.6	84.9	77.9
80°	47.5	48.0	48.4	52.2	59.2	64.2	62.8	61.4	62.8	64.2	59.2
82.5°	35.5	36.1	36.6	38.6	42.3	45.2	45.6	46.1	45.6	45.2	42.3
85°	15.5	17.3	19.2	20.6	21.5	22.4	23.4	24.3	23.4	22.4	21.5
87.5°	2.5	2.8	3.2	4.3	6.2	7.6	7.6	7.6	7.6	7.6	6.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1427992

CATALOG NUMBER: SQ2W-PP3-0U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7
2.5°	1000.2	998.5	999.2	1000.0	1000.7	1001.5	1000.7	1000.0	999.2	998.5	1000.2
5°	999.6	998.0	998.9	1000.4	1003.7	1007.0	1003.7	1000.4	998.9	998.0	999.6
7.5°	996.4	995.1	996.7	998.9	1003.0	1007.0	1003.0	998.9	996.7	995.1	996.4
10°	992.0	991.3	993.6	996.2	999.5	1002.8	999.5	996.2	993.6	991.3	992.0
12.5°	984.2	984.0	987.1	990.2	993.1	996.0	993.1	990.2	987.1	984.0	984.2
15°	972.0	973.2	977.4	981.1	983.5	985.8	983.5	981.1	977.4	973.2	972.0
17.5°	959.5	962.4	968.4	973.6	976.0	978.4	976.0	973.6	968.4	962.4	959.5
20°	950.5	954.7	962.2	969.0	973.7	978.4	973.7	969.0	962.2	954.7	950.5
22.5°	939.9	946.4	957.7	968.2	976.3	984.4	976.3	968.2	957.7	946.4	939.9
25°	925.4	937.0	953.4	968.8	981.0	993.3	981.0	968.8	953.4	937.0	925.4
27.5°	911.2	927.4	945.9	962.2	971.9	981.6	971.9	962.2	945.9	927.4	911.2
30°	897.2	915.1	934.4	951.1	960.0	968.9	960.0	951.1	934.4	915.1	897.2
32.5°	878.0	897.2	918.0	935.6	943.8	952.0	943.8	935.6	918.0	897.2	878.0
35°	848.3	869.7	891.4	908.7	913.4	918.1	913.4	908.7	891.4	869.7	848.3
37.5°	815.3	833.2	845.4	854.5	854.8	855.1	854.8	854.5	845.4	833.2	815.3
40°	790.5	803.0	805.3	805.6	799.4	793.3	799.4	805.6	805.3	803.0	790.5
42.5°	758.4	761.6	752.3	738.5	711.3	684.2	711.3	738.5	752.3	761.6	758.4
45°	703.5	682.9	635.4	595.1	576.3	557.4	576.3	595.1	635.4	682.9	703.5
47.5°	624.5	593.2	541.6	499.6	486.6	473.7	486.6	499.6	541.6	593.2	624.5
50°	561.3	526.1	482.3	446.5	434.3	422.1	434.3	446.5	482.3	526.1	561.3
52.5°	502.6	465.4	427.3	394.1	375.5	356.9	375.5	394.1	427.3	465.4	502.6
55°	430.0	389.1	344.5	306.5	288.7	270.8	288.7	306.5	344.5	389.1	430.0
57.5°	366.2	325.6	273.1	228.8	208.7	188.7	208.7	228.8	273.1	325.6	366.2
60°	320.7	282.0	230.2	189.0	179.1	169.2	179.1	189.0	230.2	282.0	320.7
62.5°	275.4	240.8	198.1	165.2	161.7	158.2	161.7	165.2	198.1	240.8	275.4
65°	214.8	187.8	161.5	141.6	141.2	140.7	141.2	141.6	161.5	187.8	214.8
67.5°	167.4	147.5	133.9	123.6	123.1	122.5	123.1	123.6	133.9	147.5	167.4
70°	140.4	124.2	116.7	110.8	109.9	109.0	109.9	110.8	116.7	124.2	140.4
72.5°	119.5	106.1	101.2	97.4	96.8	96.3	96.8	97.4	101.2	106.1	119.5
75°	91.6	82.4	80.0	78.2	77.7	77.2	77.7	78.2	80.0	82.4	91.6
77.5°	67.4	61.6	60.4	59.3	58.9	58.4	58.9	59.3	60.4	61.6	67.4
80°	52.2	48.4	48.0	47.5	47.0	46.5	47.0	47.5	48.0	48.4	52.2
82.5°	38.6	36.6	36.1	35.5	34.7	33.8	34.7	35.5	36.1	36.6	38.6
85°	20.6	19.2	17.3	15.5	14.1	12.7	14.1	15.5	17.3	19.2	20.6
87.5°	4.3	3.2	2.8	2.5	2.5	2.5	2.5	2.5	2.8	3.2	4.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1427992

CATALOG NUMBER: SQ2W-PP3-OU-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1000.7	1000.7	1000.7	1000.7
2.5°	1004.3	1005.8	999.4	993.0
5°	1003.8	1005.0	997.0	989.0
7.5°	1000.5	1001.6	993.4	985.2
10°	995.7	996.8	989.7	982.7
12.5°	987.5	988.4	981.7	975.1
15°	973.9	973.7	967.6	961.5
17.5°	959.7	958.0	950.5	943.1
20°	949.5	946.6	937.7	928.7
22.5°	938.2	934.4	923.9	913.5
25°	918.9	911.3	901.0	890.6
27.5°	897.4	884.5	874.2	864.0
30°	880.8	866.0	856.1	846.2
32.5°	860.5	844.7	834.5	824.2
35°	827.2	808.8	799.0	789.1
37.5°	791.6	771.1	759.9	748.7
40°	767.9	747.4	732.8	718.2
42.5°	742.6	726.0	707.3	688.6
45°	697.4	687.3	665.2	643.1
47.5°	635.5	638.3	616.5	594.7
50°	588.1	603.0	582.4	561.7
52.5°	538.8	561.3	542.9	524.4
55°	467.2	491.9	479.2	466.5
57.5°	395.1	414.5	405.6	396.7
60°	346.6	364.2	357.2	350.1
62.5°	302.0	320.4	314.1	307.8
65°	242.6	261.9	255.7	249.6
67.5°	193.9	212.0	205.3	198.7
70°	165.4	182.3	175.2	168.2
72.5°	141.4	156.2	149.5	142.8
75°	107.5	118.2	113.1	107.9
77.5°	77.9	84.9	81.6	78.3
80°	59.2	64.2	62.8	61.4
82.5°	42.3	45.2	45.6	46.1
85°	21.5	22.4	23.4	24.3
87.5°	6.2	7.6	7.6	7.6
90°	0.0	0.0	0.0	0.0



TEST NUMBER: P1427992
 CATALOG NUMBER: SQ2W-PP3-0U-050D-L940-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	21.02	22.55	21.39	22.86	23.17	16.79	18.32	17.16	18.63	18.95
	3H	22.13	23.50	22.51	23.82	24.19	18.16	19.52	18.53	19.85	20.21
	4H	22.53	23.81	22.93	24.16	24.54	18.74	20.02	19.14	20.37	20.75
	6H	22.76	23.94	23.17	24.30	24.69	19.14	20.32	19.55	20.68	21.07
	8H	22.84	23.96	23.26	24.35	24.75	19.28	20.41	19.71	20.79	21.20
	12H	22.88	23.95	23.31	24.33	24.76	19.34	20.41	19.77	20.79	21.22
4H	2H	21.22	22.50	21.62	22.85	23.23	17.78	19.06	18.18	19.41	19.79
	3H	22.58	23.63	22.99	24.03	24.43	19.27	20.32	19.68	20.72	21.12
	4H	23.11	24.06	23.54	24.47	24.91	19.91	20.86	20.35	21.28	21.71
	6H	23.46	24.28	23.92	24.72	25.18	20.39	21.22	20.85	21.66	22.12
	8H	23.58	24.35	24.04	24.79	25.26	20.57	21.34	21.04	21.79	22.25
	12H	23.65	24.34	24.14	24.82	25.29	20.65	21.34	21.14	21.82	22.29
8H	4H	23.17	23.94	23.64	24.39	24.85	20.27	21.04	20.73	21.48	21.95
	6H	23.61	24.24	24.11	24.74	25.21	20.85	21.48	21.35	21.98	22.45
	8H	23.79	24.36	24.30	24.87	25.36	21.10	21.67	21.61	22.18	22.67
	12H	23.91	24.42	24.42	24.91	25.48	21.22	21.73	21.73	22.22	22.79
12H	4H	23.16	23.85	23.64	24.33	24.80	20.31	21.00	20.79	21.47	21.95
	6H	23.60	24.17	24.12	24.68	25.17	20.91	21.49	21.43	22.00	22.49
	8H	23.82	24.33	24.33	24.82	25.39	21.22	21.72	21.73	22.22	22.78