

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428184

Luminaire Tested: SQ2W-PR1-K-025U-050D-L940-UNV-STD-W-WM-4

Issue Date: 3/10/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1428184  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/10/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2W-PR1-K-025U-050D-L940-UNV-STD-W-WM-4  
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE  
DOWNLIGHT - PERCEIVE RIPPLE LENS  
UPLIGHT - ASYMMETRIC ROLL LENS  
DOWNLIGHT 500 LUMENS PER FOOT  
UPLIGHT 250 LUMENS PER FOOT  
Light Source: 4000K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3521.8 lumens  
Efficiency: N/A  
Efficacy: 139.2 lumens/watt  
Spacing Criteria (0/90/45): 1.28 / 1.34 / 1.36  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Direct

Input Watts (W): 25.3  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1428184

CATALOG NUMBER: SQ2W-PR1-K-025U-050D-L940-UNV-STD-W-WM-4

### Luminous Intensity Polar Plot

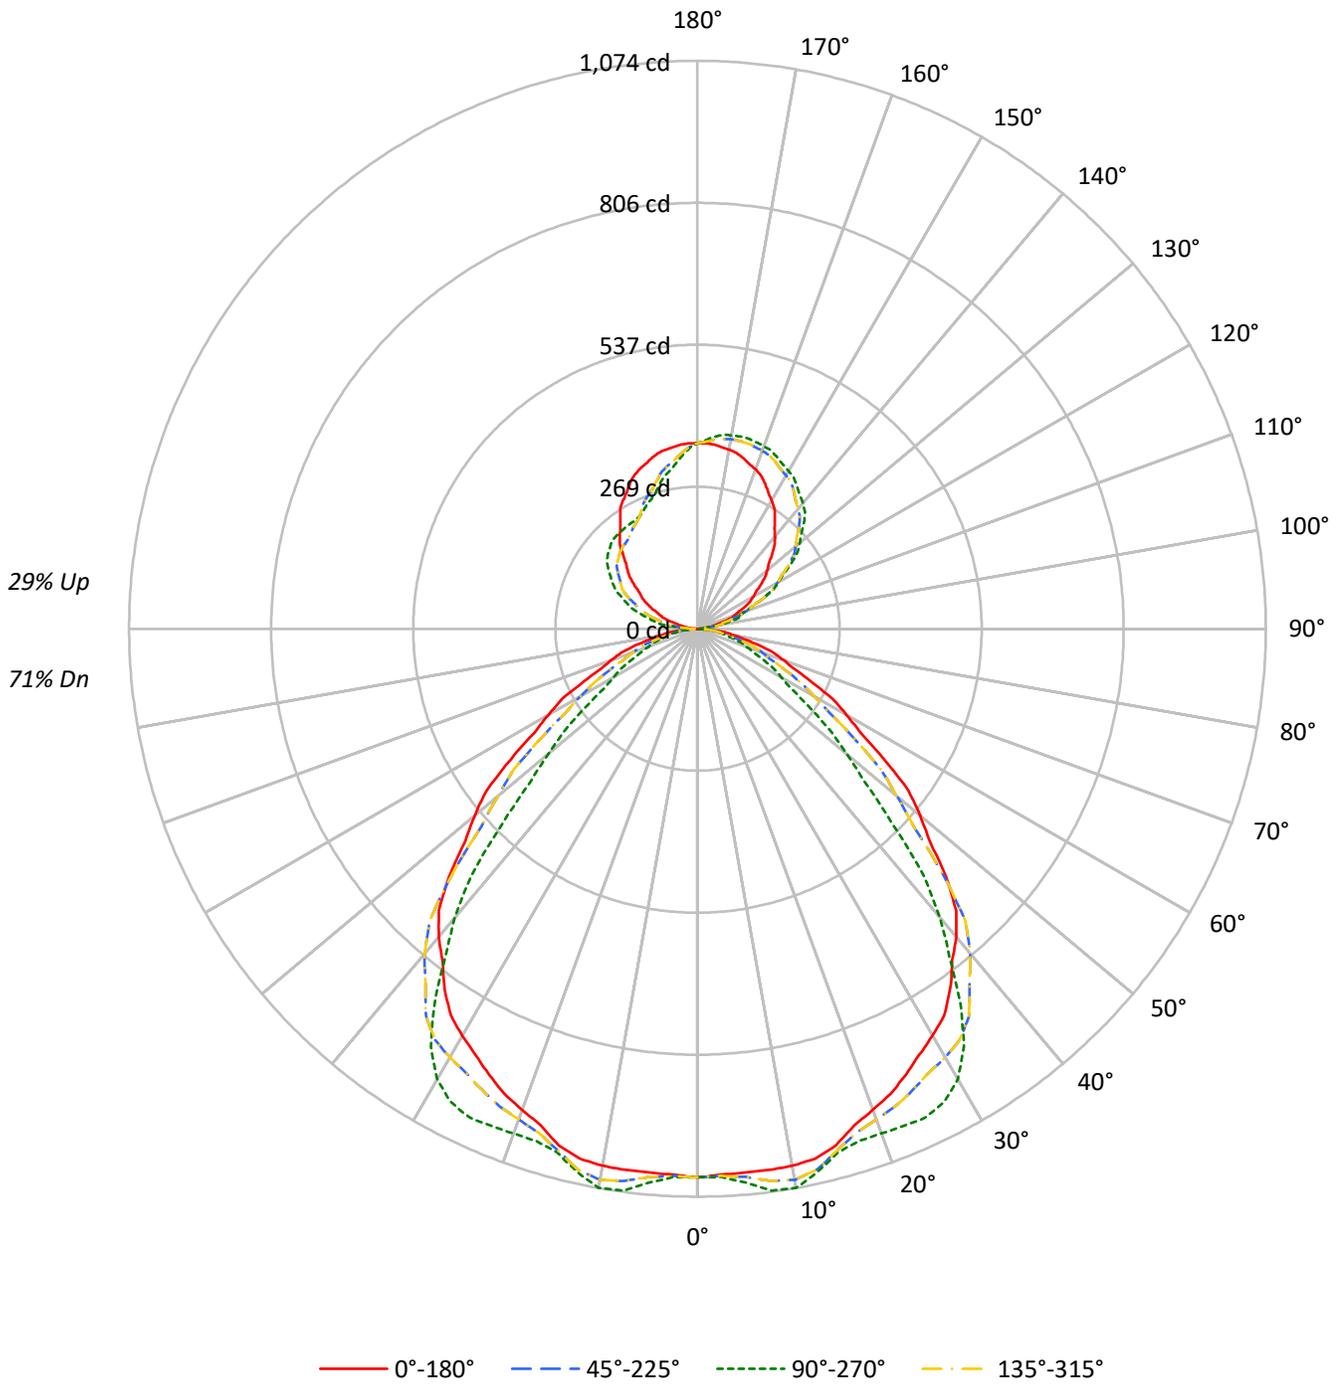



TEST NUMBER: P1428184

CATALOG NUMBER: SQ2W-PR1-K-025U-050D-L940-UNV-STD-W-WM-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	75	75	75	75	75	75	71	
1	103	99	96	92	98	94	91	88	85	82	80	76	74	73	68	67	65	65	65	65	62	
2	95	88	82	77	90	83	78	74	75	71	68	68	65	62	61	59	56	56	56	56	53	
3	87	78	71	65	82	74	68	63	67	62	58	61	57	53	55	52	49	49	49	49	46	
4	80	70	62	56	76	66	59	54	60	55	50	55	50	46	49	46	43	43	43	43	40	
5	74	62	54	48	70	60	52	47	54	48	44	49	45	41	45	41	38	38	38	38	35	
6	68	56	48	43	65	54	47	41	49	43	39	45	40	36	41	37	34	34	34	34	31	
7	63	51	43	38	60	49	42	37	45	39	34	41	36	32	37	33	30	30	30	30	28	
8	59	47	39	34	56	45	38	33	41	35	31	38	33	29	35	30	27	27	27	27	25	
9	55	43	35	30	52	41	34	29	38	32	28	35	30	26	32	28	25	25	25	25	23	
10	52	39	32	27	49	38	31	27	35	29	25	32	27	24	30	25	22	22	22	22	21	

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	16754	16754	16754	16754
5°	16732	17040	16732	17040
10°	16908	17601	16908	17601
15°	16902	17133	16902	17133
20°	16630	17448	16630	17448
25°	16582	18166	16582	18166
30°	16565	18339	16565	18339
35°	16409	17075	16409	17075
40°	16029	15025	16029	15025
45°	15168	11882	15168	11882
50°	13790	9218	13790	9218
55°	12118	7175	12118	7175
60°	10485	5909	10485	5909
65°	9050	5173	9050	5173
70°	8138	4593	8138	4593
75°	7455	4223	7455	4223
80°	6490	4128	6490	4128
85°	4705	1964	4705	1964

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 20°  
 Vertical Angle: 45°  
 Luminance: 16285 cd/sqm



TEST NUMBER: P1428184

CATALOG NUMBER: SQ2W-PR1-K-025U-050D-L940-UNV-STD-W-WM-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	100.2	2.8
10°-20°	290.1	8.2
20°-30°	448.4	12.7
30°-40°	539.3	15.3
40°-50°	484.3	13.8
50°-60°	324.5	9.2
60°-70°	188.8	5.4
70°-80°	97.0	2.8
80°-90°	25.4	0.7
90°-100°	27.9	0.8
100°-110°	81.4	2.3
110°-120°	132.8	3.8
120°-130°	168.5	4.8
130°-140°	180.3	5.1
140°-150°	168.4	4.8
150°-160°	138.6	3.9
160°-170°	92.9	2.6
170°-180°	33.0	0.9
0°-30°	838.7	23.8
0°-40°	1378.0	39.1
0°-60°	2186.8	62.1
0°-90°	2497.9	70.9
90°-120°	242.1	6.9
90°-150°	759.4	21.6
90°-180°	1024.0	29.1
0°-180°	3521.8	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1038	1038	1038	1038	1038	
5°	1032	1051	1032	1051	1032	99
15°	1011	1025	1011	1025	1011	284
25°	931	1020	931	1020	931	429
35°	832	866	832	866	832	519
45°	664	520	664	520	664	508
55°	430	255	430	255	430	387
65°	237	135	237	135	237	240
75°	120	68	120	68	120	127
85°	25	11	25	11	25	31
90°	1	8	1	15	1	2
95°	11	8	11	48	11	13
105°	52	83	52	114	52	55
115°	99	137	99	169	99	98
125°	147	218	147	208	147	131
135°	199	285	199	230	199	154
145°	255	329	255	235	255	159
155°	302	357	302	244	302	139
165°	334	372	334	280	334	94
175°	350	364	350	329	350	33
180°	351	351	351	351	351	



TEST NUMBER: P1428184

CATALOG NUMBER: SQ2W-PR1-K-025U-050D-L940-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7
2.5°	1033.4	1039.1	1044.7	1042.2	1036.9	1034.5	1034.9	1035.4	1036.5	1037.7	1036.5
5°	1032.4	1040.4	1048.4	1046.5	1041.3	1039.2	1040.1	1042.0	1046.7	1051.4	1046.7
7.5°	1032.2	1043.6	1054.9	1055.8	1053.2	1053.2	1055.9	1059.5	1065.7	1071.9	1065.7
10°	1031.3	1045.0	1058.6	1060.6	1058.7	1058.0	1058.5	1060.5	1067.1	1073.6	1067.1
12.5°	1026.3	1042.1	1058.0	1056.4	1048.8	1044.8	1044.1	1044.5	1048.1	1051.6	1048.1
15°	1011.2	1030.0	1048.8	1041.2	1024.7	1017.2	1018.6	1020.3	1022.6	1025.0	1022.6
17.5°	984.8	1004.4	1024.1	1017.2	1001.5	996.2	1001.3	1006.3	1010.9	1015.5	1010.9
20°	967.9	987.1	1006.4	1001.7	989.0	986.0	992.5	999.5	1007.5	1015.5	1007.5
22.5°	952.6	971.9	991.2	988.2	977.7	977.1	986.3	996.0	1007.0	1018.0	1007.0
25°	930.8	947.8	964.7	965.0	959.9	965.0	980.6	995.2	1007.5	1019.7	1007.5
27.5°	908.0	918.0	927.9	934.5	940.0	953.2	974.1	992.0	1000.6	1009.1	1000.6
30°	888.5	895.1	901.7	913.9	928.0	944.2	962.6	977.1	980.4	983.7	980.4
32.5°	867.4	871.3	875.3	892.5	914.1	929.8	939.4	945.7	941.4	937.2	941.4
35°	832.5	835.8	839.1	861.0	889.2	899.6	892.1	884.2	875.3	866.3	875.3
37.5°	791.0	797.8	804.5	822.5	844.1	843.9	821.9	802.8	792.6	782.3	792.6
40°	760.5	771.8	783.1	795.1	807.3	797.0	764.1	736.4	724.7	712.9	724.7
42.5°	723.3	741.4	759.4	762.1	759.6	737.5	695.5	660.5	646.1	631.7	646.1
45°	664.3	688.7	713.2	699.2	672.4	636.2	590.6	552.4	536.4	520.4	536.4
47.5°	594.7	619.8	644.9	618.5	575.0	532.9	492.1	457.9	442.9	428.0	442.9
50°	549.0	569.2	589.4	559.6	513.0	470.7	432.6	400.0	383.5	367.0	383.5
52.5°	502.4	517.0	531.6	502.0	457.7	416.6	378.5	346.2	331.2	316.3	331.2
55°	430.5	438.0	445.6	418.2	379.2	341.5	305.3	275.6	265.3	254.9	265.3
57.5°	364.5	369.3	374.1	348.1	311.9	278.5	247.7	222.8	215.2	207.5	215.2
60°	324.7	328.0	331.3	305.0	268.8	238.7	214.7	195.2	189.1	183.0	189.1
62.5°	288.3	290.9	293.4	268.0	233.3	206.5	187.4	171.9	167.3	162.7	167.3
65°	236.9	239.3	241.6	220.0	190.4	168.3	153.7	142.0	138.7	135.4	138.7
67.5°	196.1	197.3	198.6	180.7	156.6	138.8	127.3	117.9	114.8	111.7	114.8
70°	172.4	172.9	173.4	157.6	136.5	120.7	110.4	102.0	99.7	97.3	99.7
72.5°	151.3	150.6	149.9	135.9	117.4	103.9	95.4	88.7	87.1	85.5	87.1
75°	119.5	118.1	116.7	105.1	90.0	79.7	74.0	69.6	68.6	67.7	68.6
77.5°	89.3	87.8	86.3	76.6	64.2	57.0	55.1	53.7	53.7	53.7	53.7
80°	69.8	67.9	66.1	58.5	49.1	44.4	44.4	44.4	44.4	44.4	44.4
82.5°	52.0	49.4	46.8	42.2	36.9	34.3	34.3	34.2	33.8	33.4	33.8
85°	25.4	23.0	20.7	20.1	20.1	18.7	15.9	13.4	12.0	10.6	12.0
87.5°	7.0	7.3	7.6	6.5	4.8	4.0	4.0	4.0	4.1	4.1	4.1
90°	1.1	2.5	4.3	5.7	6.7	7.1	7.1	7.4	7.8	7.8	7.8
92.5°	3.9	6.2	6.2	6.2	7.6	8.2	8.8	8.9	9.2	9.2	9.2
95°	11.0	12.0	18.1	17.7	12.0	9.6	8.1	8.1	8.1	8.1	8.1
97.5°	21.0	22.5	23.5	31.5	33.3	32.2	26.2	22.0	19.7	18.6	19.7
100°	29.8	30.5	32.6	32.9	41.8	50.3	46.0	40.7	39.0	37.9	39.0
102.5°	38.5	39.0	42.2	43.7	45.8	50.6	65.3	63.7	62.5	62.3	62.5
105°	51.7	52.1	58.1	60.9	62.3	62.3	62.0	69.1	80.4	82.9	80.4
107.5°	65.8	67.4	74.5	82.1	83.7	84.2	82.3	81.3	80.8	81.1	80.8
110°	75.4	77.9	86.4	96.0	98.5	99.2	98.5	97.4	96.7	96.7	96.7



TEST NUMBER: P1428184

CATALOG NUMBER: SQ2W-PR1-K-025U-050D-L940-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	84.8	88.4	98.0	109.0	113.2	115.3	113.8	113.0	112.3	112.9	112.3
115°	99.2	104.5	117.2	128.6	137.1	138.1	137.8	137.8	137.4	137.4	137.4
117.5°	112.5	121.0	135.3	148.5	158.3	161.2	162.6	162.2	161.7	162.4	161.7
120°	121.9	131.8	148.1	162.9	172.5	176.8	178.2	177.5	178.2	177.5	178.2
122.5°	131.8	144.0	160.0	175.4	186.7	191.5	193.2	193.3	193.5	193.1	193.5
125°	146.6	161.5	180.3	196.2	207.9	213.6	215.0	215.4	216.1	217.8	216.1
127.5°	161.7	178.5	199.1	214.5	226.5	233.4	235.6	236.3	237.8	238.6	237.8
130°	172.2	191.3	212.2	226.7	238.4	245.8	249.7	250.8	252.6	252.2	252.6
132.5°	183.2	203.2	224.4	239.5	250.3	258.3	261.6	264.7	265.3	265.8	265.3
135°	199.4	221.0	242.3	257.2	267.4	275.2	279.5	282.3	284.1	285.1	284.1
137.5°	216.5	239.3	259.7	273.0	283.3	290.0	294.9	297.8	299.7	300.5	299.7
140°	228.1	250.1	269.9	283.7	292.9	299.7	303.9	307.5	309.6	309.6	309.6
142.5°	239.2	260.9	280.1	293.9	302.0	308.2	312.7	315.4	317.8	317.8	317.8
145°	254.7	276.3	294.0	307.8	314.6	320.2	325.2	327.3	328.7	328.7	328.7
147.5°	270.9	290.0	306.2	319.4	325.1	331.8	335.7	337.4	339.1	338.4	339.1
150°	280.5	298.3	313.8	326.2	331.9	338.3	342.2	343.6	345.4	344.3	345.4
152.5°	289.9	306.8	320.9	332.5	337.3	343.7	348.1	349.5	350.8	350.0	350.8
155°	302.5	317.4	330.5	341.1	345.4	351.4	355.6	357.4	358.8	357.1	358.8
157.5°	313.8	326.6	338.0	347.8	352.3	357.5	361.4	363.6	365.1	364.3	365.1
160°	320.6	332.3	342.5	351.7	356.0	360.6	364.9	367.3	368.7	367.7	368.7
162.5°	326.2	336.8	346.5	354.9	358.5	362.6	367.7	369.9	371.3	370.0	371.3
165°	334.4	342.9	351.4	358.5	361.7	364.9	370.2	372.6	373.7	372.3	373.7
167.5°	340.6	347.1	353.9	360.0	362.4	365.5	370.8	372.9	374.2	372.4	374.2
170°	344.0	349.6	355.6	360.6	362.4	365.2	370.5	372.3	373.4	371.6	373.4
172.5°	346.8	351.0	355.9	360.3	361.2	363.5	368.5	370.3	371.1	369.6	371.1
175°	349.6	352.1	355.6	358.5	358.1	359.5	363.8	365.2	366.6	364.5	366.6
177.5°	351.0	352.1	353.2	354.9	353.8	353.8	356.9	357.8	358.0	356.9	358.0
180°	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7



TEST NUMBER: P1428184

CATALOG NUMBER: SQ2W-PR1-K-025U-050D-L940-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7
2.5°	1035.4	1034.9	1034.5	1036.9	1042.2	1044.7	1039.1	1033.4	1039.1	1044.7	1042.2
5°	1042.0	1040.1	1039.2	1041.3	1046.5	1048.4	1040.4	1032.4	1040.4	1048.4	1046.5
7.5°	1059.5	1055.9	1053.2	1053.2	1055.8	1054.9	1043.6	1032.2	1043.6	1054.9	1055.8
10°	1060.5	1058.5	1058.0	1058.7	1060.6	1058.6	1045.0	1031.3	1045.0	1058.6	1060.6
12.5°	1044.5	1044.1	1044.8	1048.8	1056.4	1058.0	1042.1	1026.3	1042.1	1058.0	1056.4
15°	1020.3	1018.6	1017.2	1024.7	1041.2	1048.8	1030.0	1011.2	1030.0	1048.8	1041.2
17.5°	1006.3	1001.3	996.2	1001.5	1017.2	1024.1	1004.4	984.8	1004.4	1024.1	1017.2
20°	999.5	992.5	986.0	989.0	1001.7	1006.4	987.1	967.9	987.1	1006.4	1001.7
22.5°	996.0	986.3	977.1	977.7	988.2	991.2	971.9	952.6	971.9	991.2	988.2
25°	995.2	980.6	965.0	959.9	965.0	964.7	947.8	930.8	947.8	964.7	965.0
27.5°	992.0	974.1	953.2	940.0	934.5	927.9	918.0	908.0	918.0	927.9	934.5
30°	977.1	962.6	944.2	928.0	913.9	901.7	895.1	888.5	895.1	901.7	913.9
32.5°	945.7	939.4	929.8	914.1	892.5	875.3	871.3	867.4	871.3	875.3	892.5
35°	884.2	892.1	899.6	889.2	861.0	839.1	835.8	832.5	835.8	839.1	861.0
37.5°	802.8	821.9	843.9	844.1	822.5	804.5	797.8	791.0	797.8	804.5	822.5
40°	736.4	764.1	797.0	807.3	795.1	783.1	771.8	760.5	771.8	783.1	795.1
42.5°	660.5	695.5	737.5	759.6	762.1	759.4	741.4	723.3	741.4	759.4	762.1
45°	552.4	590.6	636.2	672.4	699.2	713.2	688.7	664.3	688.7	713.2	699.2
47.5°	457.9	492.1	532.9	575.0	618.5	644.9	619.8	594.7	619.8	644.9	618.5
50°	400.0	432.6	470.7	513.0	559.6	589.4	569.2	549.0	569.2	589.4	559.6
52.5°	346.2	378.5	416.6	457.7	502.0	531.6	517.0	502.4	517.0	531.6	502.0
55°	275.6	305.3	341.5	379.2	418.2	445.6	438.0	430.5	438.0	445.6	418.2
57.5°	222.8	247.7	278.5	311.9	348.1	374.1	369.3	364.5	369.3	374.1	348.1
60°	195.2	214.7	238.7	268.8	305.0	331.3	328.0	324.7	328.0	331.3	305.0
62.5°	171.9	187.4	206.5	233.3	268.0	293.4	290.9	288.3	290.9	293.4	268.0
65°	142.0	153.7	168.3	190.4	220.0	241.6	239.3	236.9	239.3	241.6	220.0
67.5°	117.9	127.3	138.8	156.6	180.7	198.6	197.3	196.1	197.3	198.6	180.7
70°	102.0	110.4	120.7	136.5	157.6	173.4	172.9	172.4	172.9	173.4	157.6
72.5°	88.7	95.4	103.9	117.4	135.9	149.9	150.6	151.3	150.6	149.9	135.9
75°	69.6	74.0	79.7	90.0	105.1	116.7	118.1	119.5	118.1	116.7	105.1
77.5°	53.7	55.1	57.0	64.2	76.6	86.3	87.8	89.3	87.8	86.3	76.6
80°	44.4	44.4	44.4	49.1	58.5	66.1	67.9	69.8	67.9	66.1	58.5
82.5°	34.2	34.3	34.3	36.9	42.2	46.8	49.4	52.0	49.4	46.8	42.2
85°	13.4	15.9	18.7	20.1	20.1	20.7	23.0	25.4	23.0	20.7	20.1
87.5°	4.0	4.0	4.0	4.8	6.5	7.6	7.3	7.0	7.3	7.5	6.6
90°	7.4	7.1	7.1	6.7	5.7	4.3	2.5	1.1	2.5	3.9	6.4
92.5°	8.9	8.8	8.2	7.6	6.2	6.2	6.2	3.9	6.7	9.6	13.7
95°	8.1	8.1	9.6	12.0	17.7	18.1	12.0	11.0	15.6	22.0	27.6
97.5°	22.0	26.2	32.2	33.3	31.5	23.5	22.5	21.0	28.6	34.9	44.0
100°	40.7	46.0	50.3	41.8	32.9	32.6	30.5	29.8	37.9	43.9	52.8
102.5°	63.7	65.3	50.6	45.8	43.7	42.2	39.0	38.5	46.7	55.0	62.4
105°	69.1	62.0	62.3	62.3	60.9	58.1	52.1	51.7	60.9	70.5	79.7
107.5°	81.3	82.3	84.2	83.7	82.1	74.5	67.4	65.8	74.1	85.6	95.7
110°	97.4	98.5	99.2	98.5	96.0	86.4	77.9	75.4	82.9	94.9	105.9



TEST NUMBER: P1428184

CATALOG NUMBER: SQ2W-PR1-K-025U-050D-L940-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	113.0	113.8	115.3	113.2	109.0	98.0	88.4	84.8	92.2	104.6	115.8
115°	137.8	137.8	138.1	137.1	128.6	117.2	104.5	99.2	105.6	116.9	129.3
117.5°	162.2	162.6	161.2	158.3	148.5	135.3	121.0	112.5	117.5	129.5	142.3
120°	177.5	178.2	176.8	172.5	162.9	148.1	131.8	121.9	125.7	137.4	150.2
122.5°	193.3	193.2	191.5	186.7	175.4	160.0	144.0	131.8	133.4	144.2	156.7
125°	215.4	215.0	213.6	207.9	196.2	180.3	161.5	146.6	144.5	153.7	166.5
127.5°	236.3	235.6	233.4	226.5	214.5	199.1	178.5	161.7	156.9	162.7	174.4
130°	250.8	249.7	245.8	238.4	226.7	212.2	191.3	172.2	165.4	169.0	179.2
132.5°	264.7	261.6	258.3	250.3	239.5	224.4	203.2	183.2	173.9	175.5	183.5
135°	282.3	279.5	275.2	267.4	257.2	242.3	221.0	199.4	186.7	185.3	189.9
137.5°	297.8	294.9	290.0	283.3	273.0	259.7	239.3	216.5	200.4	195.7	197.4
140°	307.5	303.9	299.7	292.9	283.7	269.9	250.1	228.1	210.1	203.3	202.3
142.5°	315.4	312.7	308.2	302.0	293.9	280.1	260.9	239.2	220.0	211.3	208.8
145°	327.3	325.2	320.2	314.6	307.8	294.0	276.3	254.7	235.6	224.2	218.9
147.5°	337.4	335.7	331.8	325.1	319.4	306.2	290.0	270.9	251.3	237.3	230.4
150°	343.6	342.2	338.3	331.9	326.2	313.8	298.3	280.5	261.8	246.9	238.0
152.5°	349.5	348.1	343.7	337.3	332.5	320.9	306.8	289.9	270.8	256.0	246.8
155°	357.4	355.6	351.4	345.4	341.1	330.5	317.4	302.5	286.2	270.6	260.4
157.5°	363.6	361.4	357.5	352.3	347.8	338.0	326.6	313.8	299.5	284.7	274.2
160°	367.3	364.9	360.6	356.0	351.7	342.5	332.3	320.6	307.5	294.0	282.7
162.5°	369.9	367.7	362.6	358.5	354.9	346.5	336.8	326.2	314.6	302.8	292.3
165°	372.6	370.2	364.9	361.7	358.5	351.4	342.9	334.4	324.5	314.9	306.4
167.5°	372.9	370.8	365.5	362.4	360.0	353.9	347.1	340.6	332.8	325.3	318.2
170°	372.3	370.5	365.2	362.4	360.6	355.6	349.6	344.0	337.9	331.6	325.9
172.5°	370.3	368.5	363.5	361.2	360.3	355.9	351.0	346.8	341.6	336.9	332.4
175°	365.2	363.8	359.5	358.1	358.5	355.6	352.1	349.6	346.4	343.6	341.1
177.5°	357.8	356.9	353.8	353.8	354.9	353.2	352.1	351.0	349.5	348.7	347.8
180°	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7



TEST NUMBER: P1428184

CATALOG NUMBER: SQ2W-PR1-K-025U-050D-L940-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7
2.5°	1036.9	1034.5	1034.9	1035.4	1036.5	1037.7	1036.5	1035.4	1034.9	1034.5	1036.9
5°	1041.3	1039.2	1040.1	1042.0	1046.7	1051.4	1046.7	1042.0	1040.1	1039.2	1041.3
7.5°	1053.2	1053.2	1055.9	1059.5	1065.7	1071.9	1065.7	1059.5	1055.9	1053.2	1053.2
10°	1058.7	1058.0	1058.5	1060.5	1067.1	1073.6	1067.1	1060.5	1058.5	1058.0	1058.7
12.5°	1048.8	1044.8	1044.1	1044.5	1048.1	1051.6	1048.1	1044.5	1044.1	1044.8	1048.8
15°	1024.7	1017.2	1018.6	1020.3	1022.6	1025.0	1022.6	1020.3	1018.6	1017.2	1024.7
17.5°	1001.5	996.2	1001.3	1006.3	1010.9	1015.5	1010.9	1006.3	1001.3	996.2	1001.5
20°	989.0	986.0	992.5	999.5	1007.5	1015.5	1007.5	999.5	992.5	986.0	989.0
22.5°	977.7	977.1	986.3	996.0	1007.0	1018.0	1007.0	996.0	986.3	977.1	977.7
25°	959.9	965.0	980.6	995.2	1007.5	1019.7	1007.5	995.2	980.6	965.0	959.9
27.5°	940.0	953.2	974.1	992.0	1000.6	1009.1	1000.6	992.0	974.1	953.2	940.0
30°	928.0	944.2	962.6	977.1	980.4	983.7	980.4	977.1	962.6	944.2	928.0
32.5°	914.1	929.8	939.4	945.7	941.4	937.2	941.4	945.7	939.4	929.8	914.1
35°	889.2	899.6	892.1	884.2	875.3	866.3	875.3	884.2	892.1	899.6	889.2
37.5°	844.1	843.9	821.9	802.8	792.6	782.3	792.6	802.8	821.9	843.9	844.1
40°	807.3	797.0	764.1	736.4	724.7	712.9	724.7	736.4	764.1	797.0	807.3
42.5°	759.6	737.5	695.5	660.5	646.1	631.7	646.1	660.5	695.5	737.5	759.6
45°	672.4	636.2	590.6	552.4	536.4	520.4	536.4	552.4	590.6	636.2	672.4
47.5°	575.0	532.9	492.1	457.9	442.9	428.0	442.9	457.9	492.1	532.9	575.0
50°	513.0	470.7	432.6	400.0	383.5	367.0	383.5	400.0	432.6	470.7	513.0
52.5°	457.7	416.6	378.5	346.2	331.2	316.3	331.2	346.2	378.5	416.6	457.7
55°	379.2	341.5	305.3	275.6	265.3	254.9	265.3	275.6	305.3	341.5	379.2
57.5°	311.9	278.5	247.7	222.8	215.2	207.5	215.2	222.8	247.7	278.5	311.9
60°	268.8	238.7	214.7	195.2	189.1	183.0	189.1	195.2	214.7	238.7	268.8
62.5°	233.3	206.5	187.4	171.9	167.3	162.7	167.3	171.9	187.4	206.5	233.3
65°	190.4	168.3	153.7	142.0	138.7	135.4	138.7	142.0	153.7	168.3	190.4
67.5°	156.6	138.8	127.3	117.9	114.8	111.7	114.8	117.9	127.3	138.8	156.6
70°	136.5	120.7	110.4	102.0	99.7	97.3	99.7	102.0	110.4	120.7	136.5
72.5°	117.4	103.9	95.4	88.7	87.1	85.5	87.1	88.7	95.4	103.9	117.4
75°	90.0	79.7	74.0	69.6	68.6	67.7	68.6	69.6	74.0	79.7	90.0
77.5°	64.2	57.0	55.1	53.7	53.7	53.7	53.7	53.7	55.1	57.0	64.2
80°	49.1	44.4	44.4	44.4	44.4	44.4	44.4	44.4	44.4	44.4	49.1
82.5°	36.9	34.3	34.3	34.2	33.8	33.4	33.8	34.2	34.3	34.3	36.9
85°	20.1	18.7	15.9	13.4	12.0	10.6	12.0	13.4	15.9	18.7	20.1
87.5°	5.1	4.7	5.2	5.4	5.7	5.6	5.7	5.4	5.2	4.7	5.1
90°	8.1	10.6	13.1	14.5	15.9	15.2	15.9	14.5	13.1	10.6	8.1
92.5°	16.4	20.5	23.6	26.1	27.3	27.1	27.3	26.1	23.6	20.5	16.4
95°	32.9	37.9	42.9	46.4	48.5	47.8	48.5	46.4	42.9	37.9	32.9
97.5°	50.8	57.5	63.0	66.3	68.4	69.9	68.4	66.3	63.0	57.5	50.8
100°	62.7	69.1	75.4	79.3	82.9	84.3	82.9	79.3	75.4	69.1	62.7
102.5°	72.3	80.7	87.6	91.8	94.8	96.2	94.8	91.8	87.6	80.7	72.3
105°	88.2	97.1	104.5	109.8	113.0	114.1	113.0	109.8	104.5	97.1	88.2
107.5°	104.1	113.2	120.1	126.0	129.9	132.1	129.9	126.0	120.1	113.2	104.1
110°	116.5	124.0	131.4	136.7	140.6	142.0	140.6	136.7	131.4	124.0	116.5



TEST NUMBER: P1428184

CATALOG NUMBER: SQ2W-PR1-K-025U-050D-L940-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	127.0	135.3	142.8	148.1	152.5	154.5	152.5	148.1	142.8	135.3	127.0
115°	141.7	152.7	159.4	164.4	167.5	169.3	167.5	164.4	159.4	152.7	141.7
117.5°	153.9	165.4	172.7	176.5	178.0	179.3	178.0	176.5	172.7	165.4	153.9
120°	161.5	172.2	180.7	185.6	187.4	188.1	187.4	185.6	180.7	172.2	161.5
122.5°	168.6	178.7	186.9	193.0	195.9	196.6	195.9	193.0	186.9	178.7	168.6
125°	178.5	188.1	196.6	202.6	205.8	207.6	205.8	202.6	196.6	188.1	178.5
127.5°	187.2	197.5	205.3	210.8	213.9	215.3	213.9	210.8	205.3	197.5	187.2
130°	192.0	202.6	210.4	216.4	219.3	220.7	219.3	216.4	210.4	202.6	192.0
132.5°	195.7	206.9	214.9	220.4	223.5	224.9	223.5	220.4	214.9	206.9	195.7
135°	200.1	211.8	220.3	225.6	228.5	229.9	228.5	225.6	220.3	211.8	200.1
137.5°	204.0	214.7	223.5	229.1	231.7	232.6	231.7	229.1	223.5	214.7	204.0
140°	206.9	216.1	224.9	230.2	233.1	233.4	233.1	230.2	224.9	216.1	206.9
142.5°	210.6	217.8	225.5	230.8	233.6	234.3	233.6	230.8	225.5	217.8	210.6
145°	217.1	221.4	226.7	231.7	234.1	234.9	234.1	231.7	226.7	221.4	217.1
147.5°	225.4	226.8	229.5	232.8	235.2	235.7	235.2	232.8	229.5	226.8	225.4
150°	231.7	231.3	232.4	234.5	236.6	236.3	236.6	234.5	232.4	231.3	231.7
152.5°	238.7	236.7	236.6	237.6	238.6	238.5	238.6	237.6	236.6	236.7	238.7
155°	250.8	246.9	244.8	244.1	244.1	243.7	244.1	244.1	244.8	246.9	250.8
157.5°	264.0	258.6	255.4	253.7	253.2	252.4	253.2	253.7	255.4	258.6	264.0
160°	273.1	267.1	263.9	261.1	260.0	258.9	260.0	261.1	263.9	267.1	273.1
162.5°	281.6	275.9	272.4	269.8	268.8	267.2	268.8	269.8	272.4	275.9	281.6
165°	295.4	289.4	285.5	283.4	282.0	280.5	282.0	283.4	285.5	289.4	295.4
167.5°	309.2	302.6	300.1	297.7	296.3	293.8	296.3	297.7	300.1	302.6	309.2
170°	317.7	311.7	310.3	308.2	305.7	302.9	305.7	308.2	310.3	311.7	317.7
172.5°	325.1	321.1	319.7	317.5	316.7	314.5	316.7	317.5	319.7	321.1	325.1
175°	335.8	332.6	332.6	332.3	331.2	329.1	331.2	332.3	332.6	332.6	335.8
177.5°	344.7	343.0	344.2	344.2	343.9	341.9	343.9	344.2	344.2	343.0	344.7
180°	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7



TEST NUMBER: P1428184

CATALOG NUMBER: SQ2W-PR1-K-025U-050D-L940-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
0°	1037.7	1037.7	1037.7	1037.7
2.5°	1042.2	1044.7	1039.1	1033.4
5°	1046.5	1048.4	1040.4	1032.4
7.5°	1055.8	1054.9	1043.6	1032.2
10°	1060.6	1058.6	1045.0	1031.3
12.5°	1056.4	1058.0	1042.1	1026.3
15°	1041.2	1048.8	1030.0	1011.2
17.5°	1017.2	1024.1	1004.4	984.8
20°	1001.7	1006.4	987.1	967.9
22.5°	988.2	991.2	971.9	952.6
25°	965.0	964.7	947.8	930.8
27.5°	934.5	927.9	918.0	908.0
30°	913.9	901.7	895.1	888.5
32.5°	892.5	875.3	871.3	867.4
35°	861.0	839.1	835.8	832.5
37.5°	822.5	804.5	797.8	791.0
40°	795.1	783.1	771.8	760.5
42.5°	762.1	759.4	741.4	723.3
45°	699.2	713.2	688.7	664.3
47.5°	618.5	644.9	619.8	594.7
50°	559.6	589.4	569.2	549.0
52.5°	502.0	531.6	517.0	502.4
55°	418.2	445.6	438.0	430.5
57.5°	348.1	374.1	369.3	364.5
60°	305.0	331.3	328.0	324.7
62.5°	268.0	293.4	290.9	288.3
65°	220.0	241.6	239.3	236.9
67.5°	180.7	198.6	197.3	196.1
70°	157.6	173.4	172.9	172.4
72.5°	135.9	149.9	150.6	151.3
75°	105.1	116.7	118.1	119.5
77.5°	76.6	86.3	87.8	89.3
80°	58.5	66.1	67.9	69.8
82.5°	42.2	46.8	49.4	52.0
85°	20.1	20.7	23.0	25.4
87.5°	6.6	7.5	7.3	7.0
90°	6.4	3.9	2.5	1.1
92.5°	13.7	9.6	6.7	3.9
95°	27.6	22.0	15.6	11.0
97.5°	44.0	34.9	28.6	21.0
100°	52.8	43.9	37.9	29.8
102.5°	62.4	55.0	46.7	38.5
105°	79.7	70.5	60.9	51.7
107.5°	95.7	85.6	74.1	65.8
110°	105.9	94.9	82.9	75.4



TEST NUMBER: P1428184

CATALOG NUMBER: SQ2W-PR1-K-025U-050D-L940-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
112.5°	115.8	104.6	92.2	84.8
115°	129.3	116.9	105.6	99.2
117.5°	142.3	129.5	117.5	112.5
120°	150.2	137.4	125.7	121.9
122.5°	156.7	144.2	133.4	131.8
125°	166.5	153.7	144.5	146.6
127.5°	174.4	162.7	156.9	161.7
130°	179.2	169.0	165.4	172.2
132.5°	183.5	175.5	173.9	183.2
135°	189.9	185.3	186.7	199.4
137.5°	197.4	195.7	200.4	216.5
140°	202.3	203.3	210.1	228.1
142.5°	208.8	211.3	220.0	239.2
145°	218.9	224.2	235.6	254.7
147.5°	230.4	237.3	251.3	270.9
150°	238.0	246.9	261.8	280.5
152.5°	246.8	256.0	270.8	289.9
155°	260.4	270.6	286.2	302.5
157.5°	274.2	284.7	299.5	313.8
160°	282.7	294.0	307.5	320.6
162.5°	292.3	302.8	314.6	326.2
165°	306.4	314.9	324.5	334.4
167.5°	318.2	325.3	332.8	340.6
170°	325.9	331.6	337.9	344.0
172.5°	332.4	336.9	341.6	346.8
175°	341.1	343.6	346.4	349.6
177.5°	347.8	348.7	349.5	351.0
180°	350.7	350.7	350.7	350.7



TEST NUMBER: P1428184  
 CATALOG NUMBER: SQ2W-PR1-K-025U-050D-L940-UNV-STD-W-WM-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.24	19.26	19.00	20.04	20.98	14.61	15.63	15.37	16.41	17.35
	3H	19.46	20.37	20.23	21.16	22.13	15.78	16.69	16.56	17.48	18.45
	4H	19.95	20.81	20.74	21.60	22.59	16.25	17.11	17.05	17.91	18.89
	6H	20.26	21.04	21.06	21.85	22.85	16.60	17.39	17.41	18.20	19.19
	8H	20.36	21.11	21.18	21.94	22.94	16.74	17.49	17.56	18.32	19.32
	12H	20.41	21.12	21.23	21.94	22.96	16.78	17.50	17.60	18.31	19.34
4H	2H	18.36	19.22	19.16	20.02	21.00	15.34	16.20	16.14	16.99	17.98
	3H	19.84	20.55	20.65	21.38	22.38	16.71	17.42	17.52	18.25	19.25
	4H	20.47	21.11	21.30	21.95	22.97	17.26	17.90	18.08	18.73	19.76
	6H	20.91	21.47	21.75	22.32	23.35	17.70	18.26	18.54	19.11	20.14
	8H	21.07	21.59	21.92	22.44	23.49	17.89	18.41	18.73	19.26	20.30
	12H	21.15	21.61	22.01	22.48	23.53	17.94	18.41	18.80	19.28	20.33
8H	4H	20.51	21.03	21.35	21.88	22.92	17.60	18.12	18.44	18.97	20.01
	6H	21.04	21.47	21.92	22.37	23.41	18.14	18.57	19.02	19.46	20.51
	8H	21.28	21.66	22.16	22.55	23.61	18.41	18.79	19.29	19.67	20.74
	12H	21.40	21.74	22.29	22.62	23.74	18.51	18.84	19.39	19.72	20.84
12H	4H	20.47	20.94	21.34	21.81	22.86	17.62	18.09	18.49	18.96	20.01
	6H	21.03	21.42	21.92	22.30	23.37	18.21	18.60	19.10	19.48	20.55
	8H	21.29	21.63	22.18	22.51	23.62	18.51	18.85	19.39	19.73	20.84