

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428220

Luminaire Tested: SQ2W-PR1-K-050U-100D-L940-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1428220
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-9)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PR1-K-050U-100D-L940-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE RIPPLE LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 500 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6855.3 lumens
Efficiency: N/A
Efficacy: 130.6 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.34 / 1.36
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 52.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1428220

CATALOG NUMBER: SQ2W-PR1-K-050U-100D-L940-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

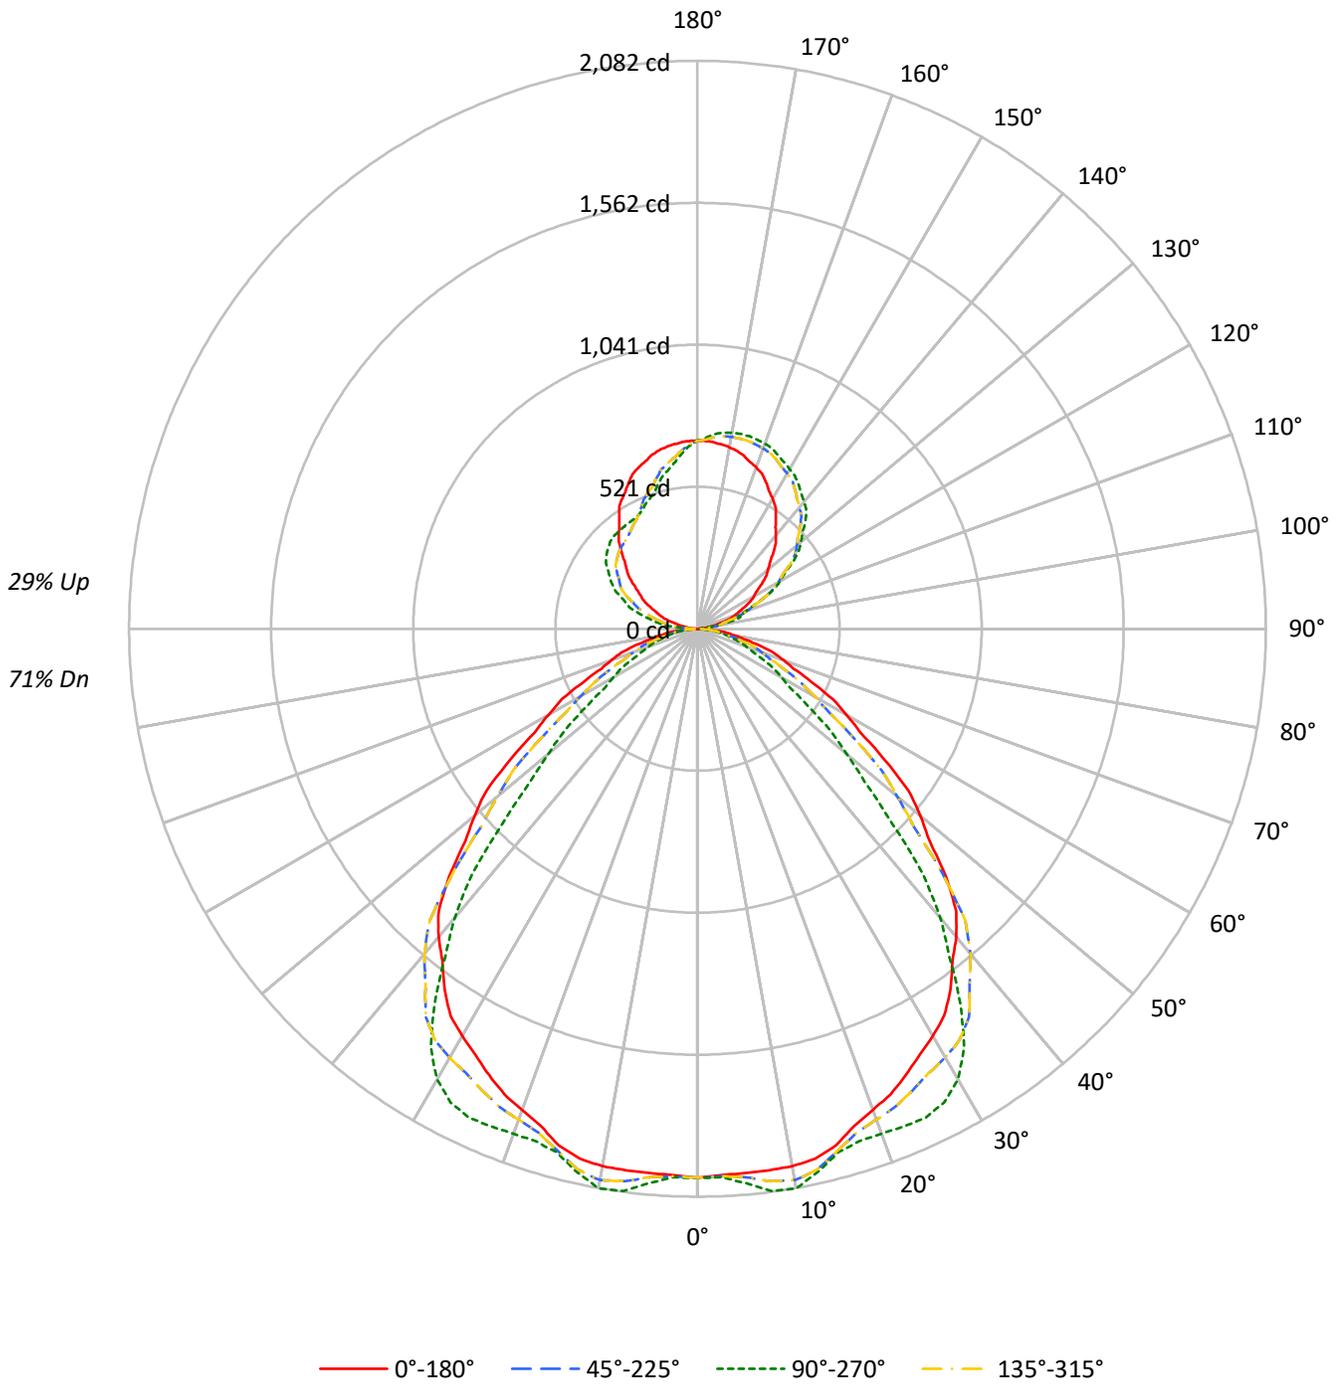



TEST NUMBER: P1428220

CATALOG NUMBER: SQ2W-PR1-K-050U-100D-L940-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	75	75	75	71				
1	103	99	96	92	98	94	91	88	85	82	80	76	74	72	68	66	65	61				
2	95	88	82	77	90	83	78	74	75	71	68	68	65	62	61	58	56	53				
3	87	78	71	65	82	74	68	63	67	62	58	61	57	53	55	51	49	46				
4	80	69	62	56	76	66	59	54	60	55	50	55	50	46	49	46	43	40				
5	74	62	54	48	70	60	52	47	54	48	44	49	44	41	45	41	38	35				
6	68	56	48	42	65	54	46	41	49	43	39	45	40	36	41	37	33	31				
7	63	51	43	38	60	49	42	36	45	39	34	41	36	32	37	33	30	28				
8	59	47	39	34	56	45	38	33	41	35	31	38	33	29	34	30	27	25				
9	55	43	35	30	52	41	34	29	38	32	28	35	30	26	32	28	24	23				
10	52	39	32	27	49	38	31	27	35	29	25	32	27	24	30	25	22	21				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	32495	32495	32495	32495
5°	32453	33051	32453	33051
10°	32794	34140	32794	34140
15°	32783	33230	32783	33230
20°	32254	33839	32254	33839
25°	32163	35234	32163	35234
30°	32130	35571	32130	35571
35°	31824	33119	31824	33119
40°	31090	29145	31090	29145
45°	29418	23048	29418	23048
50°	26746	17882	26746	17882
55°	23504	13917	23504	13917
60°	20337	11460	20337	11460
65°	17558	10032	17558	10032
70°	15786	8908	15786	8908
75°	14460	8191	14460	8191
80°	12589	8015	12589	8015
85°	9114	3798	9114	3798

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°
 Vertical Angle: 45°
 Luminance: 31583 cd/sqm



TEST NUMBER: P1428220

CATALOG NUMBER: SQ2W-PR1-K-050U-100D-L940-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	194.4	2.8
10°-20°	562.7	8.2
20°-30°	869.8	12.7
30°-40°	1046.0	15.3
40°-50°	939.3	13.7
50°-60°	629.4	9.2
60°-70°	366.1	5.3
70°-80°	188.1	2.7
80°-90°	49.2	0.7
90°-100°	54.8	0.8
100°-110°	159.8	2.3
110°-120°	260.8	3.8
120°-130°	330.9	4.8
130°-140°	354.1	5.2
140°-150°	330.7	4.8
150°-160°	272.1	4.0
160°-170°	182.5	2.7
170°-180°	64.8	0.9
0°-30°	1626.8	23.7
0°-40°	2672.8	39.0
0°-60°	4241.4	61.9
0°-90°	4844.8	70.7
90°-120°	475.4	6.9
90°-150°	1491.1	21.8
90°-180°	2010.0	29.3
0°-180°	6855.3	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2013	2013	2013	2013	2013	
5°	2002	2039	2002	2039	2002	191
15°	1961	1988	1961	1988	1961	551
25°	1805	1978	1805	1978	1805	833
35°	1615	1680	1615	1680	1615	1007
45°	1288	1009	1288	1009	1288	986
55°	835	494	835	494	835	750
65°	460	263	460	263	460	465
75°	232	131	232	131	232	246
85°	49	20	49	20	49	61
90°	2	15	2	30	2	3
95°	22	16	22	94	22	26
105°	102	163	102	224	102	108
115°	195	270	195	332	195	192
125°	288	428	288	408	288	258
135°	392	560	392	451	392	303
145°	500	645	500	461	500	313
155°	594	701	594	478	594	273
165°	657	731	657	551	657	185
175°	686	716	686	646	686	65
180°	689	689	689	689	689	



TEST NUMBER: P1428220

CATALOG NUMBER: SQ2W-PR1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6
2.5°	2004.4	2015.4	2026.3	2021.4	2011.2	2006.4	2007.2	2008.3	2010.4	2012.6	2010.4
5°	2002.4	2017.9	2033.4	2029.7	2019.7	2015.6	2017.4	2021.1	2030.2	2039.3	2030.2
7.5°	2002.0	2024.0	2046.1	2047.8	2042.7	2042.8	2048.1	2055.0	2067.1	2079.1	2067.1
10°	2000.3	2026.8	2053.2	2057.1	2053.4	2052.1	2053.0	2056.9	2069.6	2082.4	2069.6
12.5°	1990.5	2021.3	2052.1	2048.9	2034.3	2026.4	2025.1	2025.8	2032.8	2039.7	2032.8
15°	1961.3	1997.8	2034.3	2019.5	1987.6	1973.0	1975.7	1978.9	1983.4	1988.0	1983.4
17.5°	1910.0	1948.2	1986.3	1973.0	1942.5	1932.2	1942.1	1951.7	1960.6	1969.5	1960.6
20°	1877.2	1914.6	1952.0	1942.9	1918.3	1912.3	1925.1	1938.5	1954.0	1969.5	1954.0
22.5°	1847.7	1885.1	1922.4	1916.6	1896.4	1895.2	1913.1	1931.8	1953.1	1974.5	1953.1
25°	1805.4	1838.2	1871.1	1871.8	1861.7	1871.8	1901.8	1930.3	1954.0	1977.8	1954.0
27.5°	1761.1	1780.4	1799.8	1812.5	1823.1	1848.7	1889.4	1924.0	1940.6	1957.2	1940.6
30°	1723.4	1736.1	1748.9	1772.6	1799.9	1831.4	1867.0	1895.2	1901.6	1908.0	1901.6
32.5°	1682.3	1690.0	1697.6	1731.0	1773.0	1803.3	1822.1	1834.1	1825.9	1817.7	1825.9
35°	1614.6	1621.0	1627.4	1670.0	1724.7	1744.8	1730.2	1714.9	1697.6	1680.3	1697.6
37.5°	1534.2	1547.3	1560.5	1595.2	1637.1	1636.8	1594.1	1557.1	1537.2	1517.4	1537.2
40°	1475.1	1497.0	1518.9	1542.1	1565.8	1545.8	1481.9	1428.4	1405.6	1382.8	1405.6
42.5°	1402.9	1437.9	1472.9	1478.1	1473.4	1430.3	1349.0	1281.0	1253.1	1225.2	1253.1
45°	1288.4	1335.8	1383.2	1356.1	1304.1	1233.9	1145.5	1071.4	1040.4	1009.4	1040.4
47.5°	1153.4	1202.1	1250.8	1199.6	1115.2	1033.5	954.5	888.1	859.1	830.1	859.1
50°	1064.8	1104.0	1143.2	1085.3	995.0	913.0	839.1	775.7	743.8	711.9	743.8
52.5°	974.5	1002.8	1031.0	973.7	887.8	807.9	734.1	671.4	642.4	613.4	642.4
55°	835.0	849.6	864.2	811.1	735.4	662.4	592.2	534.6	514.5	494.4	514.5
57.5°	707.0	716.3	725.6	675.3	605.0	540.1	480.5	432.1	417.3	402.5	417.3
60°	629.8	636.2	642.6	591.5	521.3	463.0	416.5	378.6	366.8	354.9	366.8
62.5°	559.3	564.2	569.1	519.9	452.6	400.4	363.4	333.4	324.5	315.5	324.5
65°	459.6	464.1	468.7	426.7	369.3	326.4	298.2	275.4	269.0	262.6	269.0
67.5°	380.4	382.7	385.1	350.6	303.7	269.1	246.9	228.7	222.7	216.6	222.7
70°	334.4	335.3	336.2	305.7	264.7	234.1	214.1	197.9	193.3	188.7	193.3
72.5°	293.4	292.1	290.8	263.6	227.6	201.5	185.1	172.0	168.9	165.8	168.9
75°	231.8	229.1	226.4	203.8	174.6	154.6	143.6	135.0	133.1	131.3	133.1
77.5°	173.2	170.2	167.3	148.5	124.5	110.6	107.0	104.2	104.2	104.2	104.2
80°	135.4	131.8	128.1	113.5	95.3	86.2	86.2	86.2	86.2	86.2	86.2
82.5°	100.9	95.8	90.7	81.8	71.6	66.5	66.5	66.3	65.6	64.8	65.6
85°	49.2	44.7	40.1	39.0	39.0	36.2	30.8	26.0	23.3	20.5	23.3
87.5°	13.5	14.1	14.8	12.6	9.4	7.7	7.7	7.8	8.0	8.0	8.0
90°	2.1	4.9	8.3	11.1	13.2	13.9	13.9	14.6	15.3	15.3	15.3
92.5°	7.7	12.1	12.2	12.2	14.9	16.1	17.2	17.4	18.1	18.1	18.1
95°	21.6	23.6	35.5	34.8	23.6	18.8	16.0	16.0	16.0	16.0	16.0
97.5°	41.2	44.2	46.2	61.9	65.4	63.2	51.5	43.3	38.7	36.6	38.7
100°	58.4	59.8	64.0	64.7	82.1	98.8	90.4	80.0	76.5	74.4	76.5
102.5°	75.7	76.5	82.9	85.8	89.9	99.3	128.3	125.1	122.7	122.3	122.7
105°	101.5	102.2	114.1	119.6	122.4	122.4	121.7	135.6	157.9	162.7	157.9
107.5°	129.2	132.4	146.3	161.2	164.4	165.3	161.6	159.5	158.7	159.3	158.7
110°	148.1	153.0	169.7	188.5	193.4	194.7	193.4	191.3	189.9	189.9	189.9



TEST NUMBER: P1428220

CATALOG NUMBER: SQ2W-PR1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	166.5	173.6	192.5	214.1	222.3	226.5	223.4	221.9	220.5	221.6	220.5
115°	194.7	205.2	230.2	252.5	269.2	271.2	270.6	270.6	269.9	269.9	269.9
117.5°	220.9	237.6	265.7	291.6	310.9	316.5	319.2	318.4	317.6	319.0	317.6
120°	239.3	258.7	290.7	319.9	338.7	347.1	349.8	348.4	349.8	348.4	349.8
122.5°	258.7	282.7	314.1	344.4	366.5	376.0	379.3	379.6	379.9	379.1	379.9
125°	287.9	317.2	354.0	385.3	408.3	419.4	422.2	422.9	424.3	427.7	424.3
127.5°	317.4	350.5	391.0	421.2	444.7	458.2	462.5	464.0	467.0	468.5	467.0
130°	338.0	375.6	416.6	445.1	468.1	482.7	490.3	492.4	495.9	495.2	495.9
132.5°	359.7	398.9	440.5	470.2	491.4	507.2	513.7	519.7	520.9	521.9	520.9
135°	391.6	434.0	475.7	504.9	525.1	540.4	548.8	554.3	557.8	559.9	557.8
137.5°	425.1	469.9	509.9	536.0	556.3	569.5	578.9	584.8	588.4	590.1	588.4
140°	447.9	491.0	530.0	557.1	575.2	588.4	596.7	603.7	607.9	607.9	607.9
142.5°	469.6	512.2	550.0	577.1	593.0	605.1	614.0	619.3	624.0	624.0	624.0
145°	500.1	542.5	577.3	604.4	617.6	628.7	638.5	642.6	645.4	645.4	645.4
147.5°	531.9	569.5	601.2	627.2	638.3	651.4	659.1	662.4	665.9	664.3	665.9
150°	550.8	585.6	616.2	640.6	651.7	664.2	671.9	674.6	678.1	676.0	678.1
152.5°	569.2	602.3	630.1	652.8	662.3	674.8	683.5	686.3	688.7	687.2	688.7
155°	594.0	623.2	648.9	669.8	678.1	689.9	698.3	701.8	704.5	701.1	704.5
157.5°	616.1	641.3	663.7	682.8	691.8	701.9	709.7	714.0	716.8	715.3	716.8
160°	629.4	652.4	672.6	690.6	699.0	708.0	716.4	721.2	724.0	721.9	724.0
162.5°	640.6	661.3	680.3	696.8	704.0	711.9	721.9	726.2	729.0	726.4	729.0
165°	656.6	673.3	689.9	703.9	710.1	716.4	726.8	731.7	733.8	731.0	733.8
167.5°	668.7	681.5	695.0	706.9	711.5	717.6	728.1	732.1	734.7	731.3	734.7
170°	675.3	686.5	698.3	708.0	711.5	717.1	727.5	731.0	733.1	729.6	733.1
172.5°	680.9	689.2	698.8	707.5	709.3	713.7	723.6	727.1	728.6	725.7	728.6
175°	686.5	691.3	698.3	703.9	703.2	705.9	714.3	717.1	719.9	715.7	719.9
177.5°	689.1	691.3	693.6	696.9	694.7	694.7	700.8	702.5	703.0	700.8	703.0
180°	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6



TEST NUMBER: P1428220

CATALOG NUMBER: SQ2W-PR1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6
2.5°	2008.3	2007.2	2006.4	2011.2	2021.4	2026.3	2015.4	2004.4	2015.4	2026.3	2021.4
5°	2021.1	2017.4	2015.6	2019.7	2029.7	2033.4	2017.9	2002.4	2017.9	2033.4	2029.7
7.5°	2055.0	2048.1	2042.8	2042.7	2047.8	2046.1	2024.0	2002.0	2024.0	2046.1	2047.8
10°	2056.9	2053.0	2052.1	2053.4	2057.1	2053.2	2026.8	2000.3	2026.8	2053.2	2057.1
12.5°	2025.8	2025.1	2026.4	2034.3	2048.9	2052.1	2021.3	1990.5	2021.3	2052.1	2048.9
15°	1978.9	1975.7	1973.0	1987.6	2019.5	2034.3	1997.8	1961.3	1997.8	2034.3	2019.5
17.5°	1951.7	1942.1	1932.2	1942.5	1973.0	1986.3	1948.2	1910.0	1948.2	1986.3	1973.0
20°	1938.5	1925.1	1912.3	1918.3	1942.9	1952.0	1914.6	1877.2	1914.6	1952.0	1942.9
22.5°	1931.8	1913.1	1895.2	1896.4	1916.6	1922.4	1885.1	1847.7	1885.1	1922.4	1916.6
25°	1930.3	1901.8	1871.8	1861.7	1871.8	1871.1	1838.2	1805.4	1838.2	1871.1	1871.8
27.5°	1924.0	1889.4	1848.7	1823.1	1812.5	1799.8	1780.4	1761.1	1780.4	1799.8	1812.5
30°	1895.2	1867.0	1831.4	1799.9	1772.6	1748.9	1736.1	1723.4	1736.1	1748.9	1772.6
32.5°	1834.1	1822.1	1803.3	1773.0	1731.0	1697.6	1690.0	1682.3	1690.0	1697.6	1731.0
35°	1714.9	1730.2	1744.8	1724.7	1670.0	1627.4	1621.0	1614.6	1621.0	1627.4	1670.0
37.5°	1557.1	1594.1	1636.8	1637.1	1595.2	1560.5	1547.3	1534.2	1547.3	1560.5	1595.2
40°	1428.4	1481.9	1545.8	1565.8	1542.1	1518.9	1497.0	1475.1	1497.0	1518.9	1542.1
42.5°	1281.0	1349.0	1430.3	1473.4	1478.1	1472.9	1437.9	1402.9	1437.9	1472.9	1478.1
45°	1071.4	1145.5	1233.9	1304.1	1356.1	1383.2	1335.8	1288.4	1335.8	1383.2	1356.1
47.5°	888.1	954.5	1033.5	1115.2	1199.6	1250.8	1202.1	1153.4	1202.1	1250.8	1199.6
50°	775.7	839.1	913.0	995.0	1085.3	1143.2	1104.0	1064.8	1104.0	1143.2	1085.3
52.5°	671.4	734.1	807.9	887.8	973.7	1031.0	1002.8	974.5	1002.8	1031.0	973.7
55°	534.6	592.2	662.4	735.4	811.1	864.2	849.6	835.0	849.6	864.2	811.1
57.5°	432.1	480.5	540.1	605.0	675.3	725.6	716.3	707.0	716.3	725.6	675.3
60°	378.6	416.5	463.0	521.3	591.5	642.6	636.2	629.8	636.2	642.6	591.5
62.5°	333.4	363.4	400.4	452.6	519.9	569.1	564.2	559.3	564.2	569.1	519.9
65°	275.4	298.2	326.4	369.3	426.7	468.7	464.1	459.6	464.1	468.7	426.7
67.5°	228.7	246.9	269.1	303.7	350.6	385.1	382.7	380.4	382.7	385.1	350.6
70°	197.9	214.1	234.1	264.7	305.7	336.2	335.3	334.4	335.3	336.2	305.7
72.5°	172.0	185.1	201.5	227.6	263.6	290.8	292.1	293.4	292.1	290.8	263.6
75°	135.0	143.6	154.6	174.6	203.8	226.4	229.1	231.8	229.1	226.4	203.8
77.5°	104.2	107.0	110.6	124.5	148.5	167.3	170.2	173.2	170.2	167.3	148.5
80°	86.2	86.2	86.2	95.3	113.5	128.1	131.8	135.4	131.8	128.1	113.5
82.5°	66.3	66.5	66.5	71.6	81.8	90.7	95.8	100.9	95.8	90.7	81.8
85°	26.0	30.8	36.2	39.0	39.0	40.1	44.7	49.2	44.7	40.1	39.0
87.5°	7.8	7.7	7.7	9.4	12.6	14.8	14.1	13.5	14.1	14.7	12.9
90°	14.6	13.9	13.9	13.2	11.1	8.3	4.9	2.1	4.9	7.7	12.5
92.5°	17.4	17.2	16.1	14.9	12.2	12.2	12.1	7.7	13.2	18.8	27.0
95°	16.0	16.0	18.8	23.6	34.8	35.5	23.6	21.6	30.6	43.1	54.2
97.5°	43.3	51.5	63.2	65.4	61.9	46.2	44.2	41.2	56.1	68.4	86.4
100°	80.0	90.4	98.8	82.1	64.7	64.0	59.8	58.4	74.4	86.2	103.6
102.5°	125.1	128.3	99.3	89.9	85.8	82.9	76.5	75.7	91.7	107.9	122.5
105°	135.6	121.7	122.4	122.4	119.6	114.1	102.2	101.5	119.6	138.4	156.5
107.5°	159.5	161.6	165.3	164.4	161.2	146.3	132.4	129.2	145.5	168.0	187.9
110°	191.3	193.4	194.7	193.4	188.5	169.7	153.0	148.1	162.7	186.4	208.0



TEST NUMBER: P1428220

CATALOG NUMBER: SQ2W-PR1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	221.9	223.4	226.5	222.3	214.1	192.5	173.6	166.5	181.1	205.3	227.4
115°	270.6	270.6	271.2	269.2	252.5	230.2	205.2	194.7	207.3	229.5	253.9
117.5°	318.4	319.2	316.5	310.9	291.6	265.7	237.6	220.9	230.8	254.3	279.3
120°	348.4	349.8	347.1	338.7	319.9	290.7	258.7	239.3	246.9	269.9	294.9
122.5°	379.6	379.3	376.0	366.5	344.4	314.1	282.7	258.7	261.9	283.2	307.7
125°	422.9	422.2	419.4	408.3	385.3	354.0	317.2	287.9	283.8	301.9	326.9
127.5°	464.0	462.5	458.2	444.7	421.2	391.0	350.5	317.4	308.1	319.5	342.5
130°	492.4	490.3	482.7	468.1	445.1	416.6	375.6	338.0	324.8	331.8	351.9
132.5°	519.7	513.7	507.2	491.4	470.2	440.5	398.9	359.7	341.5	344.6	360.3
135°	554.3	548.8	540.4	525.1	504.9	475.7	434.0	391.6	366.5	363.8	372.8
137.5°	584.8	578.9	569.5	556.3	536.0	509.9	469.9	425.1	393.5	384.2	387.7
140°	603.7	596.7	588.4	575.2	557.1	530.0	491.0	447.9	412.4	399.2	397.1
142.5°	619.3	614.0	605.1	593.0	577.1	550.0	512.2	469.6	431.9	414.8	409.9
145°	642.6	638.5	628.7	617.6	604.4	577.3	542.5	500.1	462.5	440.3	429.8
147.5°	662.4	659.1	651.4	638.3	627.2	601.2	569.5	531.9	493.4	465.9	452.4
150°	674.6	671.9	664.2	651.7	640.6	616.2	585.6	550.8	514.0	484.8	467.4
152.5°	686.3	683.5	674.8	662.3	652.8	630.1	602.3	569.2	531.8	502.6	484.6
155°	701.8	698.3	689.9	678.1	669.8	648.9	623.2	594.0	562.0	531.4	511.2
157.5°	714.0	709.7	701.9	691.8	682.8	663.7	641.3	616.1	588.1	558.9	538.3
160°	721.2	716.4	708.0	699.0	690.6	672.6	652.4	629.4	603.7	577.3	555.0
162.5°	726.2	721.9	711.9	704.0	696.8	680.3	661.3	640.6	617.6	594.5	573.9
165°	731.7	726.8	716.4	710.1	703.9	689.9	673.3	656.6	637.1	618.3	601.6
167.5°	732.1	728.1	717.6	711.5	706.9	695.0	681.5	668.7	653.5	638.8	624.8
170°	731.0	727.5	717.1	711.5	708.0	698.3	686.5	675.3	663.5	651.0	639.9
172.5°	727.1	723.6	713.7	709.3	707.5	698.8	689.2	680.9	670.7	661.6	652.7
175°	717.1	714.3	705.9	703.2	703.9	698.3	691.3	686.5	680.2	674.6	669.8
177.5°	702.5	700.8	694.7	694.7	696.9	693.6	691.3	689.1	686.3	684.7	683.0
180°	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6



TEST NUMBER: P1428220

CATALOG NUMBER: SQ2W-PR1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6	2012.6
2.5°	2011.2	2006.4	2007.2	2008.3	2010.4	2012.6	2010.4	2008.3	2007.2	2006.4	2011.2
5°	2019.7	2015.6	2017.4	2021.1	2030.2	2039.3	2030.2	2021.1	2017.4	2015.6	2019.7
7.5°	2042.7	2042.8	2048.1	2055.0	2067.1	2079.1	2067.1	2055.0	2048.1	2042.8	2042.7
10°	2053.4	2052.1	2053.0	2056.9	2069.6	2082.4	2069.6	2056.9	2053.0	2052.1	2053.4
12.5°	2034.3	2026.4	2025.1	2025.8	2032.8	2039.7	2032.8	2025.8	2025.1	2026.4	2034.3
15°	1987.6	1973.0	1975.7	1978.9	1983.4	1988.0	1983.4	1978.9	1975.7	1973.0	1987.6
17.5°	1942.5	1932.2	1942.1	1951.7	1960.6	1969.5	1960.6	1951.7	1942.1	1932.2	1942.5
20°	1918.3	1912.3	1925.1	1938.5	1954.0	1969.5	1954.0	1938.5	1925.1	1912.3	1918.3
22.5°	1896.4	1895.2	1913.1	1931.8	1953.1	1974.5	1953.1	1931.8	1913.1	1895.2	1896.4
25°	1861.7	1871.8	1901.8	1930.3	1954.0	1977.8	1954.0	1930.3	1901.8	1871.8	1861.7
27.5°	1823.1	1848.7	1889.4	1924.0	1940.6	1957.2	1940.6	1924.0	1889.4	1848.7	1823.1
30°	1799.9	1831.4	1867.0	1895.2	1901.6	1908.0	1901.6	1895.2	1867.0	1831.4	1799.9
32.5°	1773.0	1803.3	1822.1	1834.1	1825.9	1817.7	1825.9	1834.1	1822.1	1803.3	1773.0
35°	1724.7	1744.8	1730.2	1714.9	1697.6	1680.3	1697.6	1714.9	1730.2	1744.8	1724.7
37.5°	1637.1	1636.8	1594.1	1557.1	1537.2	1517.4	1537.2	1557.1	1594.1	1636.8	1637.1
40°	1565.8	1545.8	1481.9	1428.4	1405.6	1382.8	1405.6	1428.4	1481.9	1545.8	1565.8
42.5°	1473.4	1430.3	1349.0	1281.0	1253.1	1225.2	1253.1	1281.0	1349.0	1430.3	1473.4
45°	1304.1	1233.9	1145.5	1071.4	1040.4	1009.4	1040.4	1071.4	1145.5	1233.9	1304.1
47.5°	1115.2	1033.5	954.5	888.1	859.1	830.1	859.1	888.1	954.5	1033.5	1115.2
50°	995.0	913.0	839.1	775.7	743.8	711.9	743.8	775.7	839.1	913.0	995.0
52.5°	887.8	807.9	734.1	671.4	642.4	613.4	642.4	671.4	734.1	807.9	887.8
55°	735.4	662.4	592.2	534.6	514.5	494.4	514.5	534.6	592.2	662.4	735.4
57.5°	605.0	540.1	480.5	432.1	417.3	402.5	417.3	432.1	480.5	540.1	605.0
60°	521.3	463.0	416.5	378.6	366.8	354.9	366.8	378.6	416.5	463.0	521.3
62.5°	452.6	400.4	363.4	333.4	324.5	315.5	324.5	333.4	363.4	400.4	452.6
65°	369.3	326.4	298.2	275.4	269.0	262.6	269.0	275.4	298.2	326.4	369.3
67.5°	303.7	269.1	246.9	228.7	222.7	216.6	222.7	228.7	246.9	269.1	303.7
70°	264.7	234.1	214.1	197.9	193.3	188.7	193.3	197.9	214.1	234.1	264.7
72.5°	227.6	201.5	185.1	172.0	168.9	165.8	168.9	172.0	185.1	201.5	227.6
75°	174.6	154.6	143.6	135.0	133.1	131.3	133.1	135.0	143.6	154.6	174.6
77.5°	124.5	110.6	107.0	104.2	104.2	104.2	104.2	104.2	107.0	110.6	124.5
80°	95.3	86.2	86.2	86.2	86.2	86.2	86.2	86.2	86.2	86.2	95.3
82.5°	71.6	66.5	66.5	66.3	65.6	64.8	65.6	66.3	66.5	66.5	71.6
85°	39.0	36.2	30.8	26.0	23.3	20.5	23.3	26.0	30.8	36.2	39.0
87.5°	9.9	9.1	10.1	10.6	11.2	10.9	11.2	10.6	10.1	9.1	9.9
90°	16.0	20.9	25.7	28.5	31.3	29.9	31.3	28.5	20.9	16.0	16.0
92.5°	32.1	40.3	46.3	51.3	53.6	53.3	53.6	51.3	40.3	32.1	32.1
95°	64.7	74.4	84.2	91.1	95.3	93.9	95.3	91.1	74.4	64.7	64.7
97.5°	99.7	112.8	123.7	130.2	134.4	137.2	134.4	130.2	123.7	112.8	99.7
100°	123.1	135.6	148.1	155.8	162.7	165.5	162.7	155.8	148.1	135.6	123.1
102.5°	142.0	158.4	172.1	180.3	186.1	188.9	186.1	180.3	172.1	158.4	142.0
105°	173.2	190.6	205.2	215.6	221.9	224.0	221.9	215.6	205.2	190.6	173.2
107.5°	204.3	222.3	235.8	247.3	255.0	259.4	255.0	247.3	235.8	222.3	204.3
110°	228.8	243.4	258.0	268.5	276.1	278.9	276.1	268.5	243.4	228.8	228.8



TEST NUMBER: P1428220

CATALOG NUMBER: SQ2W-PR1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	249.4	265.7	280.3	290.7	299.5	303.4	299.5	290.7	280.3	265.7	249.4
115°	278.2	299.8	313.0	322.7	329.0	332.5	329.0	322.7	313.0	299.8	278.2
117.5°	302.1	324.7	339.1	346.6	349.6	352.1	349.6	346.6	339.1	324.7	302.1
120°	317.2	338.0	354.7	364.4	367.9	369.3	367.9	364.4	354.7	338.0	317.2
122.5°	331.1	350.8	366.9	378.9	384.6	386.0	384.6	378.9	366.9	350.8	331.1
125°	350.5	369.3	386.0	397.8	404.1	407.6	404.1	397.8	386.0	369.3	350.5
127.5°	367.5	387.8	403.1	413.8	419.9	422.7	419.9	413.8	403.1	387.8	367.5
130°	377.0	397.8	413.1	425.0	430.5	433.3	430.5	425.0	413.1	397.8	377.0
132.5°	384.2	406.2	422.0	432.7	438.9	441.6	438.9	432.7	422.0	406.2	384.2
135°	393.0	415.9	432.6	443.0	448.6	451.4	448.6	443.0	432.6	415.9	393.0
137.5°	400.6	421.5	438.9	449.9	454.9	456.7	454.9	449.9	438.9	421.5	400.6
140°	406.2	424.3	441.6	452.1	457.6	458.3	457.6	452.1	441.6	424.3	406.2
142.5°	413.4	427.6	442.8	453.2	458.8	460.0	458.8	453.2	442.8	427.6	413.4
145°	426.3	434.7	445.1	454.9	459.7	461.1	459.7	454.9	445.1	434.7	426.3
147.5°	442.6	445.3	450.7	457.1	461.8	462.8	461.8	457.1	445.3	442.6	442.6
150°	454.9	454.2	456.3	460.4	464.6	463.9	464.6	460.4	456.3	454.2	454.9
152.5°	468.8	464.7	464.6	466.5	468.5	468.4	468.5	466.5	464.6	464.7	468.8
155°	492.4	484.8	480.6	479.2	479.2	478.5	479.2	479.2	480.6	484.8	492.4
157.5°	518.4	507.7	501.5	498.1	497.1	495.6	497.1	498.1	501.5	507.7	518.4
160°	536.2	524.4	518.2	512.6	510.5	508.4	510.5	512.6	518.2	524.4	536.2
162.5°	552.9	541.7	534.8	529.8	527.8	524.6	527.8	529.8	534.8	541.7	552.9
165°	580.1	568.2	560.6	556.4	553.6	550.8	553.6	556.4	560.6	568.2	580.1
167.5°	607.2	594.2	589.2	584.5	581.9	576.9	581.9	584.5	589.2	594.2	607.2
170°	623.9	612.0	609.3	605.1	600.2	594.7	600.2	605.1	609.3	612.0	623.9
172.5°	638.3	630.4	627.6	623.5	621.9	617.5	621.9	623.5	627.6	630.4	638.3
175°	659.3	653.1	653.1	652.4	650.3	646.1	650.3	652.4	653.1	653.1	659.3
177.5°	676.9	673.5	675.8	675.8	675.2	671.3	675.2	675.8	675.8	673.5	676.9
180°	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6



TEST NUMBER: P1428220

CATALOG NUMBER: SQ2W-PR1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	2012.6	2012.6	2012.6	2012.6
2.5°	2021.4	2026.3	2015.4	2004.4
5°	2029.7	2033.4	2017.9	2002.4
7.5°	2047.8	2046.1	2024.0	2002.0
10°	2057.1	2053.2	2026.8	2000.3
12.5°	2048.9	2052.1	2021.3	1990.5
15°	2019.5	2034.3	1997.8	1961.3
17.5°	1973.0	1986.3	1948.2	1910.0
20°	1942.9	1952.0	1914.6	1877.2
22.5°	1916.6	1922.4	1885.1	1847.7
25°	1871.8	1871.1	1838.2	1805.4
27.5°	1812.5	1799.8	1780.4	1761.1
30°	1772.6	1748.9	1736.1	1723.4
32.5°	1731.0	1697.6	1690.0	1682.3
35°	1670.0	1627.4	1621.0	1614.6
37.5°	1595.2	1560.5	1547.3	1534.2
40°	1542.1	1518.9	1497.0	1475.1
42.5°	1478.1	1472.9	1437.9	1402.9
45°	1356.1	1383.2	1335.8	1288.4
47.5°	1199.6	1250.8	1202.1	1153.4
50°	1085.3	1143.2	1104.0	1064.8
52.5°	973.7	1031.0	1002.8	974.5
55°	811.1	864.2	849.6	835.0
57.5°	675.3	725.6	716.3	707.0
60°	591.5	642.6	636.2	629.8
62.5°	519.9	569.1	564.2	559.3
65°	426.7	468.7	464.1	459.6
67.5°	350.6	385.1	382.7	380.4
70°	305.7	336.2	335.3	334.4
72.5°	263.6	290.8	292.1	293.4
75°	203.8	226.4	229.1	231.8
77.5°	148.5	167.3	170.2	173.2
80°	113.5	128.1	131.8	135.4
82.5°	81.8	90.7	95.8	100.9
85°	39.0	40.1	44.7	49.2
87.5°	12.9	14.7	14.1	13.5
90°	12.5	7.7	4.9	2.1
92.5°	27.0	18.8	13.2	7.7
95°	54.2	43.1	30.6	21.6
97.5°	86.4	68.4	56.1	41.2
100°	103.6	86.2	74.4	58.4
102.5°	122.5	107.9	91.7	75.7
105°	156.5	138.4	119.6	101.5
107.5°	187.9	168.0	145.5	129.2
110°	208.0	186.4	162.7	148.1



TEST NUMBER: P1428220

CATALOG NUMBER: SQ2W-PR1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	227.4	205.3	181.1	166.5
115°	253.9	229.5	207.3	194.7
117.5°	279.3	254.3	230.8	220.9
120°	294.9	269.9	246.9	239.3
122.5°	307.7	283.2	261.9	258.7
125°	326.9	301.9	283.8	287.9
127.5°	342.5	319.5	308.1	317.4
130°	351.9	331.8	324.8	338.0
132.5°	360.3	344.6	341.5	359.7
135°	372.8	363.8	366.5	391.6
137.5°	387.7	384.2	393.5	425.1
140°	397.1	399.2	412.4	447.9
142.5°	409.9	414.8	431.9	469.6
145°	429.8	440.3	462.5	500.1
147.5°	452.4	465.9	493.4	531.9
150°	467.4	484.8	514.0	550.8
152.5°	484.6	502.6	531.8	569.2
155°	511.2	531.4	562.0	594.0
157.5°	538.3	558.9	588.1	616.1
160°	555.0	577.3	603.7	629.4
162.5°	573.9	594.5	617.6	640.6
165°	601.6	618.3	637.1	656.6
167.5°	624.8	638.8	653.5	668.7
170°	639.9	651.0	663.5	675.3
172.5°	652.7	661.6	670.7	680.9
175°	669.8	674.6	680.2	686.5
177.5°	683.0	684.7	686.3	689.1
180°	688.6	688.6	688.6	688.6



TEST NUMBER: P1428220
 CATALOG NUMBER: SQ2W-PR1-K-050U-100D-L940-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.52	21.54	21.28	22.32	23.26	16.89	17.91	17.65	18.69	19.63
	3H	21.74	22.65	22.52	23.44	24.42	18.06	18.97	18.84	19.76	20.74
	4H	22.23	23.09	23.03	23.89	24.87	18.53	19.39	19.33	20.19	21.18
	6H	22.54	23.32	23.35	24.13	25.13	18.88	19.67	19.69	20.48	21.48
	8H	22.64	23.39	23.46	24.22	25.22	19.03	19.77	19.85	20.60	21.60
	12H	22.69	23.40	23.51	24.22	25.25	19.06	19.78	19.89	20.60	21.62
4H	2H	20.64	21.50	21.44	22.30	23.29	17.62	18.48	18.42	19.27	20.26
	3H	22.12	22.83	22.93	23.66	24.66	18.99	19.70	19.80	20.53	21.54
	4H	22.75	23.39	23.58	24.23	25.26	19.54	20.18	20.37	21.02	22.05
	6H	23.19	23.75	24.04	24.60	25.64	19.98	20.54	20.83	21.39	22.43
	8H	23.35	23.87	24.20	24.72	25.77	20.17	20.69	21.02	21.54	22.59
	12H	23.43	23.89	24.29	24.76	25.82	20.22	20.69	21.09	21.56	22.61
8H	4H	22.79	23.31	23.64	24.16	25.21	19.88	20.40	20.73	21.25	22.30
	6H	23.33	23.75	24.20	24.65	25.70	20.42	20.85	21.30	21.75	22.80
	8H	23.56	23.94	24.45	24.83	25.90	20.69	21.07	21.57	21.96	23.02
	12H	23.69	24.02	24.57	24.90	26.02	20.79	21.12	21.67	22.00	23.12
12H	4H	22.75	23.22	23.62	24.09	25.15	19.91	20.37	20.77	21.24	22.30
	6H	23.32	23.70	24.20	24.59	25.65	20.50	20.88	21.38	21.77	22.83
	8H	23.57	23.91	24.46	24.79	25.91	20.79	21.13	21.68	22.01	23.13