

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428304

Luminaire Tested: SQ2W-PR1-K-150U-050D-L940-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1428304
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-9)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PR1-K-150U-050D-L940-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE RIPPLE LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8655.5 lumens
Efficiency: N/A
Efficacy: 118.7 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.34 / 1.36
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 72.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1428304

CATALOG NUMBER: SQ2W-PR1-K-150U-050D-L940-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

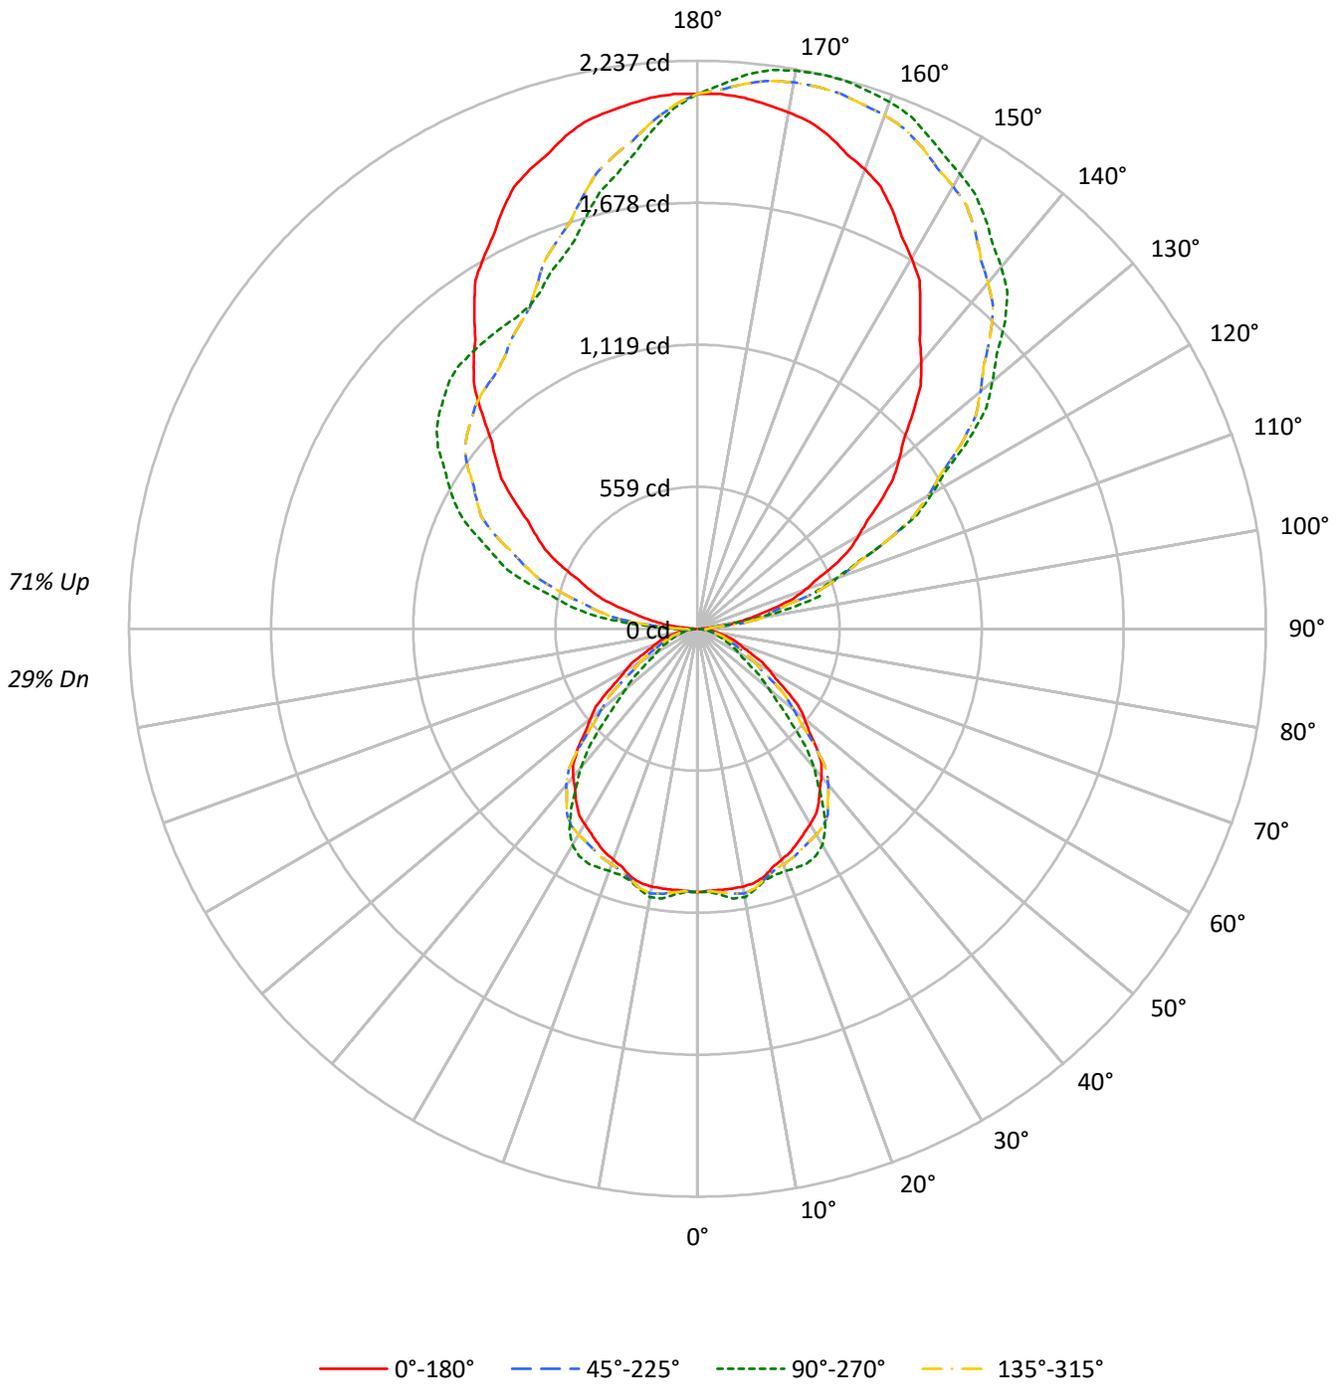



TEST NUMBER: P1428304

CATALOG NUMBER: SQ2W-PR1-K-150U-050D-L940-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	72	72	72	53	53	53	37	37	37	29
1	93	89	86	82	84	80	77	74	63	61	59	47	46	45	33	32	32	25
2	85	78	73	68	76	70	66	62	56	52	50	42	40	38	29	28	27	22
3	78	69	62	57	70	62	56	52	49	45	42	37	35	33	26	25	23	19
4	71	61	54	48	64	55	49	44	44	40	36	33	31	28	24	22	20	16
5	66	55	47	41	59	49	43	38	39	35	31	30	27	24	21	20	18	14
6	60	49	41	36	54	44	38	33	35	31	27	27	24	21	20	17	16	13
7	56	44	37	31	50	40	33	29	32	27	24	25	21	19	18	16	14	11
8	52	40	33	27	46	36	30	25	29	24	21	23	19	17	16	14	13	10
9	48	36	29	24	43	33	27	23	27	22	19	21	17	15	15	13	11	9
10	45	33	26	22	40	30	24	20	25	20	17	19	16	14	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	16754	16754	16754	16754
5°	16732	17040	16732	17040
10°	16908	17601	16908	17601
15°	16902	17133	16902	17133
20°	16630	17448	16630	17448
25°	16582	18166	16582	18166
30°	16565	18339	16565	18339
35°	16409	17075	16409	17075
40°	16029	15025	16029	15025
45°	15168	11882	15168	11882
50°	13790	9218	13790	9218
55°	12118	7175	12118	7175
60°	10485	5909	10485	5909
65°	9050	5173	9050	5173
70°	8138	4593	8138	4593
75°	7455	4223	7455	4223
80°	6490	4128	6490	4128
85°	4705	1964	4705	1964

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°
 Vertical Angle: 45°
 Luminance: 16285 cd/sqm



TEST NUMBER: P1428304

CATALOG NUMBER: SQ2W-PR1-K-150U-050D-L940-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	100.2	1.2
10°-20°	290.1	3.4
20°-30°	448.4	5.2
30°-40°	539.3	6.2
40°-50°	484.3	5.6
50°-60°	324.5	3.7
60°-70°	188.8	2.2
70°-80°	97.0	1.1
80°-90°	32.6	0.4
90°-100°	167.6	1.9
100°-110°	488.9	5.6
110°-120°	797.8	9.2
120°-130°	1012.4	11.7
130°-140°	1083.3	12.5
140°-150°	1011.5	11.7
150°-160°	832.4	9.6
160°-170°	558.2	6.4
170°-180°	198.2	2.3
0°-30°	838.7	9.7
0°-40°	1378.0	15.9
0°-60°	2186.8	25.3
0°-90°	2505.2	28.9
90°-120°	1454.3	16.8
90°-150°	4561.5	52.7
90°-180°	6150.0	71.1
0°-180°	8655.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1038	1038	1038	1038	1038	
5°	1032	1051	1032	1051	1032	99
15°	1011	1025	1011	1025	1011	284
25°	931	1020	931	1020	931	429
35°	832	866	832	866	832	519
45°	664	520	664	520	664	508
55°	430	255	430	255	430	387
65°	237	135	237	135	237	240
75°	120	68	120	68	120	127
85°	25	11	25	11	25	32
90°	6	47	6	92	6	6
95°	66	49	66	287	66	80
105°	311	498	311	685	311	330
115°	596	826	596	1017	596	587
125°	881	1308	881	1247	881	788
135°	1198	1713	1198	1381	1198	926
145°	1530	1974	1530	1411	1530	957
155°	1817	2145	1817	1464	1817	835
165°	2008	2236	2008	1685	2008	565
175°	2100	2189	2100	1977	2100	199
180°	2106	2106	2106	2106	2106	



TEST NUMBER: P1428304

CATALOG NUMBER: SQ2W-PR1-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7
2.5°	1033.4	1039.1	1044.7	1042.2	1036.9	1034.5	1034.9	1035.4	1036.5	1037.7	1036.5
5°	1032.4	1040.4	1048.4	1046.5	1041.3	1039.2	1040.1	1042.0	1046.7	1051.4	1046.7
7.5°	1032.2	1043.6	1054.9	1055.8	1053.2	1053.2	1055.9	1059.5	1065.7	1071.9	1065.7
10°	1031.3	1045.0	1058.6	1060.6	1058.7	1058.0	1058.5	1060.5	1067.1	1073.6	1067.1
12.5°	1026.3	1042.1	1058.0	1056.4	1048.8	1044.8	1044.1	1044.5	1048.1	1051.6	1048.1
15°	1011.2	1030.0	1048.8	1041.2	1024.7	1017.2	1018.6	1020.3	1022.6	1025.0	1022.6
17.5°	984.8	1004.4	1024.1	1017.2	1001.5	996.2	1001.3	1006.3	1010.9	1015.5	1010.9
20°	967.9	987.1	1006.4	1001.7	989.0	986.0	992.5	999.5	1007.5	1015.5	1007.5
22.5°	952.6	971.9	991.2	988.2	977.7	977.1	986.3	996.0	1007.0	1018.0	1007.0
25°	930.8	947.8	964.7	965.0	959.9	965.0	980.6	995.2	1007.5	1019.7	1007.5
27.5°	908.0	918.0	927.9	934.5	940.0	953.2	974.1	992.0	1000.6	1009.1	1000.6
30°	888.5	895.1	901.7	913.9	928.0	944.2	962.6	977.1	980.4	983.7	980.4
32.5°	867.4	871.3	875.3	892.5	914.1	929.8	939.4	945.7	941.4	937.2	941.4
35°	832.5	835.8	839.1	861.0	889.2	899.6	892.1	884.2	875.3	866.3	875.3
37.5°	791.0	797.8	804.5	822.5	844.1	843.9	821.9	802.8	792.6	782.3	792.6
40°	760.5	771.8	783.1	795.1	807.3	797.0	764.1	736.4	724.7	712.9	724.7
42.5°	723.3	741.4	759.4	762.1	759.6	737.5	695.5	660.5	646.1	631.7	646.1
45°	664.3	688.7	713.2	699.2	672.4	636.2	590.6	552.4	536.4	520.4	536.4
47.5°	594.7	619.8	644.9	618.5	575.0	532.9	492.1	457.9	442.9	428.0	442.9
50°	549.0	569.2	589.4	559.6	513.0	470.7	432.6	400.0	383.5	367.0	383.5
52.5°	502.4	517.0	531.6	502.0	457.7	416.6	378.5	346.2	331.2	316.3	331.2
55°	430.5	438.0	445.6	418.2	379.2	341.5	305.3	275.6	265.3	254.9	265.3
57.5°	364.5	369.3	374.1	348.1	311.9	278.5	247.7	222.8	215.2	207.5	215.2
60°	324.7	328.0	331.3	305.0	268.8	238.7	214.7	195.2	189.1	183.0	189.1
62.5°	288.3	290.9	293.4	268.0	233.3	206.5	187.4	171.9	167.3	162.7	167.3
65°	236.9	239.3	241.6	220.0	190.4	168.3	153.7	142.0	138.7	135.4	138.7
67.5°	196.1	197.3	198.6	180.7	156.6	138.8	127.3	117.9	114.8	111.7	114.8
70°	172.4	172.9	173.4	157.6	136.5	120.7	110.4	102.0	99.7	97.3	99.7
72.5°	151.3	150.6	149.9	135.9	117.4	103.9	95.4	88.7	87.1	85.5	87.1
75°	119.5	118.1	116.7	105.1	90.0	79.7	74.0	69.6	68.6	67.7	68.6
77.5°	89.3	87.8	86.3	76.6	64.2	57.0	55.1	53.7	53.7	53.7	53.7
80°	69.8	67.9	66.1	58.5	49.1	44.4	44.4	44.4	44.4	44.4	44.4
82.5°	52.0	49.4	46.8	42.2	36.9	34.3	34.3	34.2	33.8	33.4	33.8
85°	25.4	23.0	20.7	20.1	20.1	18.7	15.9	13.4	12.0	10.6	12.0
87.5°	8.0	9.7	11.9	12.2	11.6	11.0	11.0	11.5	11.9	11.9	11.9
90°	6.4	14.9	25.5	34.0	40.4	42.6	42.6	44.7	46.8	46.8	46.8
92.5°	23.4	37.0	37.4	37.4	45.5	49.4	52.8	53.2	55.3	55.3	55.3
95°	66.0	72.3	108.5	106.4	72.3	57.4	48.9	48.9	48.9	48.9	48.9
97.5°	126.0	135.3	141.3	189.4	200.0	193.2	157.4	132.3	118.3	111.9	118.3
100°	178.7	183.0	195.7	197.9	251.1	302.1	276.6	244.7	234.0	227.7	234.0
102.5°	231.5	234.0	253.6	262.6	274.9	303.8	392.3	382.6	375.3	374.0	375.3
105°	310.6	312.8	348.9	366.0	374.5	374.5	372.3	414.9	483.0	497.9	483.0
107.5°	395.3	405.1	447.7	493.2	503.0	505.5	494.5	488.1	485.5	487.2	485.5
110°	453.2	468.1	519.2	576.6	591.5	595.8	591.5	585.1	580.9	580.9	580.9



TEST NUMBER: P1428304

CATALOG NUMBER: SQ2W-PR1-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	509.4	531.1	588.9	654.9	680.0	692.8	683.4	678.7	674.5	677.9	674.5
115°	595.8	627.7	704.3	772.3	823.4	829.8	827.7	827.7	825.5	825.5	825.5
117.5°	675.8	726.8	812.8	891.9	951.1	968.1	976.6	974.1	971.5	975.8	971.5
120°	731.9	791.5	889.4	978.7	1036.2	1061.7	1070.2	1066.0	1070.2	1066.0	1070.2
122.5°	791.5	864.7	960.9	1053.6	1121.3	1150.2	1160.4	1161.3	1162.1	1159.6	1162.1
125°	880.9	970.2	1083.0	1178.7	1248.9	1283.0	1291.5	1293.6	1297.9	1308.5	1297.9
127.5°	971.1	1072.4	1196.2	1288.5	1360.4	1401.7	1414.9	1419.6	1428.5	1433.2	1428.5
130°	1034.1	1148.9	1274.5	1361.7	1431.9	1476.6	1500.0	1506.4	1517.0	1514.9	1517.0
132.5°	1100.4	1220.4	1347.7	1438.3	1503.4	1551.5	1571.5	1589.8	1593.6	1596.6	1593.6
135°	1197.9	1327.7	1455.3	1544.7	1606.4	1653.2	1678.7	1695.8	1706.4	1712.8	1706.4
137.5°	1300.4	1437.5	1560.0	1639.6	1701.7	1742.1	1771.1	1789.0	1800.0	1805.1	1800.0
140°	1370.2	1502.1	1621.3	1704.3	1759.6	1800.0	1825.5	1846.8	1859.6	1859.6	1859.6
142.5°	1436.6	1566.8	1682.6	1765.5	1814.1	1851.1	1878.3	1894.5	1909.0	1909.0	1909.0
145°	1529.8	1659.6	1766.0	1849.0	1889.4	1923.4	1953.2	1966.0	1974.5	1974.5	1974.5
147.5°	1627.2	1742.1	1839.2	1918.7	1952.8	1992.8	2016.2	2026.4	2037.0	2032.4	2037.0
150°	1685.1	1791.5	1885.1	1959.6	1993.6	2031.9	2055.3	2063.8	2074.5	2068.1	2074.5
152.5°	1741.3	1842.6	1927.7	1997.0	2026.0	2064.3	2091.1	2099.6	2106.8	2102.1	2106.8
155°	1817.0	1906.4	1985.1	2049.0	2074.5	2110.7	2136.2	2146.8	2155.3	2144.7	2155.3
157.5°	1884.7	1961.7	2030.2	2089.0	2116.2	2147.3	2171.1	2184.3	2192.8	2188.1	2192.8
160°	1925.6	1995.8	2057.5	2112.8	2138.3	2166.0	2191.5	2206.4	2214.9	2208.5	2214.9
162.5°	1959.6	2023.0	2081.3	2131.5	2153.6	2177.9	2208.5	2221.7	2230.2	2222.1	2230.2
165°	2008.5	2059.6	2110.7	2153.2	2172.4	2191.5	2223.4	2238.3	2244.7	2236.2	2244.7
167.5°	2045.6	2084.7	2126.0	2162.6	2176.6	2195.3	2227.3	2239.6	2247.7	2237.0	2247.7
170°	2066.0	2100.0	2136.2	2166.0	2176.6	2193.6	2225.6	2236.2	2242.6	2231.9	2242.6
172.5°	2083.0	2108.5	2137.9	2164.3	2169.8	2183.4	2213.6	2224.3	2229.0	2220.0	2229.0
175°	2100.0	2114.9	2136.2	2153.2	2151.1	2159.6	2185.1	2193.6	2202.1	2189.4	2202.1
177.5°	2108.1	2114.9	2121.7	2131.9	2125.1	2125.1	2143.9	2149.0	2150.7	2143.9	2150.7
180°	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4



TEST NUMBER: P1428304

CATALOG NUMBER: SQ2W-PR1-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7
2.5°	1035.4	1034.9	1034.5	1036.9	1042.2	1044.7	1039.1	1033.4	1039.1	1044.7	1042.2
5°	1042.0	1040.1	1039.2	1041.3	1046.5	1048.4	1040.4	1032.4	1040.4	1048.4	1046.5
7.5°	1059.5	1055.9	1053.2	1053.2	1055.8	1054.9	1043.6	1032.2	1043.6	1054.9	1055.8
10°	1060.5	1058.5	1058.0	1058.7	1060.6	1058.6	1045.0	1031.3	1045.0	1058.6	1060.6
12.5°	1044.5	1044.1	1044.8	1048.8	1056.4	1058.0	1042.1	1026.3	1042.1	1058.0	1056.4
15°	1020.3	1018.6	1017.2	1024.7	1041.2	1048.8	1030.0	1011.2	1030.0	1048.8	1041.2
17.5°	1006.3	1001.3	996.2	1001.5	1017.2	1024.1	1004.4	984.8	1004.4	1024.1	1017.2
20°	999.5	992.5	986.0	989.0	1001.7	1006.4	987.1	967.9	987.1	1006.4	1001.7
22.5°	996.0	986.3	977.1	977.7	988.2	991.2	971.9	952.6	971.9	991.2	988.2
25°	995.2	980.6	965.0	959.9	965.0	964.7	947.8	930.8	947.8	964.7	965.0
27.5°	992.0	974.1	953.2	940.0	934.5	927.9	918.0	908.0	918.0	927.9	934.5
30°	977.1	962.6	944.2	928.0	913.9	901.7	895.1	888.5	895.1	901.7	913.9
32.5°	945.7	939.4	929.8	914.1	892.5	875.3	871.3	867.4	871.3	875.3	892.5
35°	884.2	892.1	899.6	889.2	861.0	839.1	835.8	832.5	835.8	839.1	861.0
37.5°	802.8	821.9	843.9	844.1	822.5	804.5	797.8	791.0	797.8	804.5	822.5
40°	736.4	764.1	797.0	807.3	795.1	783.1	771.8	760.5	771.8	783.1	795.1
42.5°	660.5	695.5	737.5	759.6	762.1	759.4	741.4	723.3	741.4	759.4	762.1
45°	552.4	590.6	636.2	672.4	699.2	713.2	688.7	664.3	688.7	713.2	699.2
47.5°	457.9	492.1	532.9	575.0	618.5	644.9	619.8	594.7	619.8	644.9	618.5
50°	400.0	432.6	470.7	513.0	559.6	589.4	569.2	549.0	569.2	589.4	559.6
52.5°	346.2	378.5	416.6	457.7	502.0	531.6	517.0	502.4	517.0	531.6	502.0
55°	275.6	305.3	341.5	379.2	418.2	445.6	438.0	430.5	438.0	445.6	418.2
57.5°	222.8	247.7	278.5	311.9	348.1	374.1	369.3	364.5	369.3	374.1	348.1
60°	195.2	214.7	238.7	268.8	305.0	331.3	328.0	324.7	328.0	331.3	305.0
62.5°	171.9	187.4	206.5	233.3	268.0	293.4	290.9	288.3	290.9	293.4	268.0
65°	142.0	153.7	168.3	190.4	220.0	241.6	239.3	236.9	239.3	241.6	220.0
67.5°	117.9	127.3	138.8	156.6	180.7	198.6	197.3	196.1	197.3	198.6	180.7
70°	102.0	110.4	120.7	136.5	157.6	173.4	172.9	172.4	172.9	173.4	157.6
72.5°	88.7	95.4	103.9	117.4	135.9	149.9	150.6	151.3	150.6	149.9	135.9
75°	69.6	74.0	79.7	90.0	105.1	116.7	118.1	119.5	118.1	116.7	105.1
77.5°	53.7	55.1	57.0	64.2	76.6	86.3	87.8	89.3	87.8	86.3	76.6
80°	44.4	44.4	44.4	49.1	58.5	66.1	67.9	69.8	67.9	66.1	58.5
82.5°	34.2	34.3	34.3	36.9	42.2	46.8	49.4	52.0	49.4	46.8	42.2
85°	13.4	15.9	18.7	20.1	20.1	20.7	23.0	25.4	23.0	20.7	20.1
87.5°	11.5	11.0	11.0	11.6	12.2	11.9	9.7	8.0	9.7	11.5	13.0
90°	44.7	42.6	42.6	40.4	34.0	25.5	14.9	6.4	14.9	23.4	38.3
92.5°	53.2	52.8	49.4	45.5	37.4	37.4	37.0	23.4	40.4	57.4	82.6
95°	48.9	48.9	57.4	72.3	106.4	108.5	72.3	66.0	93.6	131.9	166.0
97.5°	132.3	157.4	193.2	200.0	189.4	141.3	135.3	126.0	171.5	209.4	264.3
100°	244.7	276.6	302.1	251.1	197.9	195.7	183.0	178.7	227.7	263.8	317.0
102.5°	382.6	392.3	303.8	274.9	262.6	253.6	234.0	231.5	280.4	330.2	374.9
105°	414.9	372.3	374.5	374.5	366.0	348.9	312.8	310.6	366.0	423.4	478.7
107.5°	488.1	494.5	505.5	503.0	493.2	447.7	405.1	395.3	445.1	514.0	574.9
110°	585.1	591.5	595.8	591.5	576.6	519.2	468.1	453.2	497.9	570.2	636.2



TEST NUMBER: P1428304

CATALOG NUMBER: SQ2W-PR1-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	678.7	683.4	692.8	680.0	654.9	588.9	531.1	509.4	554.0	628.1	695.8
115°	827.7	827.7	829.8	823.4	772.3	704.3	627.7	595.8	634.0	702.1	776.6
117.5°	974.1	976.6	968.1	951.1	891.9	812.8	726.8	675.8	706.0	777.9	854.5
120°	1066.0	1070.2	1061.7	1036.2	978.7	889.4	791.5	731.9	755.3	825.5	902.1
122.5°	1161.3	1160.4	1150.2	1121.3	1053.6	960.9	864.7	791.5	801.3	866.4	941.3
125°	1293.6	1291.5	1283.0	1248.9	1178.7	1083.0	970.2	880.9	868.1	923.4	1000.0
127.5°	1419.6	1414.9	1401.7	1360.4	1288.5	1196.2	1072.4	971.1	942.6	977.5	1047.7
130°	1506.4	1500.0	1476.6	1431.9	1361.7	1274.5	1148.9	1034.1	993.6	1014.9	1076.6
132.5°	1589.8	1571.5	1551.5	1503.4	1438.3	1347.7	1220.4	1100.4	1044.7	1054.1	1102.1
135°	1695.8	1678.7	1653.2	1606.4	1544.7	1455.3	1327.7	1197.9	1121.3	1112.8	1140.4
137.5°	1789.0	1771.1	1742.1	1701.7	1639.6	1560.0	1437.5	1300.4	1203.8	1175.3	1186.0
140°	1846.8	1825.5	1800.0	1759.6	1704.3	1621.3	1502.1	1370.2	1261.7	1221.3	1214.9
142.5°	1894.5	1878.3	1851.1	1814.1	1765.5	1682.6	1566.8	1436.6	1321.3	1268.9	1254.1
145°	1966.0	1953.2	1923.4	1889.4	1849.0	1766.0	1659.6	1529.8	1414.9	1346.8	1314.9
147.5°	2026.4	2016.2	1992.8	1952.8	1918.7	1839.2	1742.1	1627.2	1509.4	1425.1	1383.8
150°	2063.8	2055.3	2031.9	1993.6	1959.6	1885.1	1791.5	1685.1	1572.4	1483.0	1429.8
152.5°	2099.6	2091.1	2064.3	2026.0	1997.0	1927.7	1842.6	1741.3	1626.8	1537.5	1482.6
155°	2146.8	2136.2	2110.7	2074.5	2049.0	1985.1	1906.4	1817.0	1719.2	1625.5	1563.8
157.5°	2184.3	2171.1	2147.3	2116.2	2089.0	2030.2	1961.7	1884.7	1799.2	1709.8	1646.8
160°	2206.4	2191.5	2166.0	2138.3	2112.8	2057.5	1995.8	1925.6	1846.8	1766.0	1697.9
162.5°	2221.7	2208.5	2177.9	2153.6	2131.5	2081.3	2023.0	1959.6	1889.4	1818.7	1755.8
165°	2238.3	2223.4	2191.5	2172.4	2153.2	2110.7	2059.6	2008.5	1949.0	1891.5	1840.4
167.5°	2239.6	2227.3	2195.3	2176.6	2162.6	2126.0	2084.7	2045.6	1999.2	1954.1	1911.5
170°	2236.2	2225.6	2193.6	2176.6	2166.0	2136.2	2100.0	2066.0	2029.8	1991.5	1957.5
172.5°	2224.3	2213.6	2183.4	2169.8	2164.3	2137.9	2108.5	2083.0	2051.9	2023.8	1996.6
175°	2193.6	2185.1	2159.6	2151.1	2153.2	2136.2	2114.9	2100.0	2080.9	2063.8	2049.0
177.5°	2149.0	2143.9	2125.1	2125.1	2131.9	2121.7	2114.9	2108.1	2099.6	2094.5	2089.4
180°	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4



TEST NUMBER: P1428304

CATALOG NUMBER: SQ2W-PR1-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7	1037.7
2.5°	1036.9	1034.5	1034.9	1035.4	1036.5	1037.7	1036.5	1035.4	1034.9	1034.5	1036.9
5°	1041.3	1039.2	1040.1	1042.0	1046.7	1051.4	1046.7	1042.0	1040.1	1039.2	1041.3
7.5°	1053.2	1053.2	1055.9	1059.5	1065.7	1071.9	1065.7	1059.5	1055.9	1053.2	1053.2
10°	1058.7	1058.0	1058.5	1060.5	1067.1	1073.6	1067.1	1060.5	1058.5	1058.0	1058.7
12.5°	1048.8	1044.8	1044.1	1044.5	1048.1	1051.6	1048.1	1044.5	1044.1	1044.8	1048.8
15°	1024.7	1017.2	1018.6	1020.3	1022.6	1025.0	1022.6	1020.3	1018.6	1017.2	1024.7
17.5°	1001.5	996.2	1001.3	1006.3	1010.9	1015.5	1010.9	1006.3	1001.3	996.2	1001.5
20°	989.0	986.0	992.5	999.5	1007.5	1015.5	1007.5	999.5	992.5	986.0	989.0
22.5°	977.7	977.1	986.3	996.0	1007.0	1018.0	1007.0	996.0	986.3	977.1	977.7
25°	959.9	965.0	980.6	995.2	1007.5	1019.7	1007.5	995.2	980.6	965.0	959.9
27.5°	940.0	953.2	974.1	992.0	1000.6	1009.1	1000.6	992.0	974.1	953.2	940.0
30°	928.0	944.2	962.6	977.1	980.4	983.7	980.4	977.1	962.6	944.2	928.0
32.5°	914.1	929.8	939.4	945.7	941.4	937.2	941.4	945.7	939.4	929.8	914.1
35°	889.2	899.6	892.1	884.2	875.3	866.3	875.3	884.2	892.1	899.6	889.2
37.5°	844.1	843.9	821.9	802.8	792.6	782.3	792.6	802.8	821.9	843.9	844.1
40°	807.3	797.0	764.1	736.4	724.7	712.9	724.7	736.4	764.1	797.0	807.3
42.5°	759.6	737.5	695.5	660.5	646.1	631.7	646.1	660.5	695.5	737.5	759.6
45°	672.4	636.2	590.6	552.4	536.4	520.4	536.4	552.4	590.6	636.2	672.4
47.5°	575.0	532.9	492.1	457.9	442.9	428.0	442.9	457.9	492.1	532.9	575.0
50°	513.0	470.7	432.6	400.0	383.5	367.0	383.5	400.0	432.6	470.7	513.0
52.5°	457.7	416.6	378.5	346.2	331.2	316.3	331.2	346.2	378.5	416.6	457.7
55°	379.2	341.5	305.3	275.6	265.3	254.9	265.3	275.6	305.3	341.5	379.2
57.5°	311.9	278.5	247.7	222.8	215.2	207.5	215.2	222.8	247.7	278.5	311.9
60°	268.8	238.7	214.7	195.2	189.1	183.0	189.1	195.2	214.7	238.7	268.8
62.5°	233.3	206.5	187.4	171.9	167.3	162.7	167.3	171.9	187.4	206.5	233.3
65°	190.4	168.3	153.7	142.0	138.7	135.4	138.7	142.0	153.7	168.3	190.4
67.5°	156.6	138.8	127.3	117.9	114.8	111.7	114.8	117.9	127.3	138.8	156.6
70°	136.5	120.7	110.4	102.0	99.7	97.3	99.7	102.0	110.4	120.7	136.5
72.5°	117.4	103.9	95.4	88.7	87.1	85.5	87.1	88.7	95.4	103.9	117.4
75°	90.0	79.7	74.0	69.6	68.6	67.7	68.6	69.6	74.0	79.7	90.0
77.5°	64.2	57.0	55.1	53.7	53.7	53.7	53.7	53.7	55.1	57.0	64.2
80°	49.1	44.4	44.4	44.4	44.4	44.4	44.4	44.4	44.4	44.4	49.1
82.5°	36.9	34.3	34.3	34.2	33.8	33.4	33.8	34.2	34.3	34.3	36.9
85°	20.1	18.7	15.9	13.4	12.0	10.6	12.0	13.4	15.9	18.7	20.1
87.5°	13.3	15.3	18.3	20.0	21.7	20.8	21.7	20.0	18.3	15.3	13.3
90°	48.9	63.8	78.7	87.2	95.7	91.5	95.7	87.2	78.7	63.8	48.9
92.5°	98.3	123.4	141.7	157.0	163.8	163.0	163.8	157.0	141.7	123.4	98.3
95°	197.9	227.7	257.4	278.7	291.5	287.2	291.5	278.7	257.4	227.7	197.9
97.5°	305.1	345.1	378.3	398.3	411.1	419.6	411.1	398.3	378.3	345.1	305.1
100°	376.6	414.9	453.2	476.6	497.9	506.4	497.9	476.6	453.2	414.9	376.6
102.5°	434.5	484.7	526.4	551.5	569.4	577.9	569.4	551.5	526.4	484.7	434.5
105°	529.8	583.0	627.7	659.6	678.7	685.1	678.7	659.6	627.7	583.0	529.8
107.5°	625.1	680.0	721.3	756.6	780.0	793.6	780.0	756.6	721.3	680.0	625.1
110°	700.0	744.7	789.4	821.3	844.7	853.2	844.7	821.3	789.4	744.7	700.0



TEST NUMBER: P1428304

CATALOG NUMBER: SQ2W-PR1-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	763.0	812.8	857.5	889.4	916.2	928.1	916.2	889.4	857.5	812.8	763.0
115°	851.1	917.0	957.5	987.2	1006.4	1017.0	1006.4	987.2	957.5	917.0	851.1
117.5°	924.3	993.2	1037.5	1060.4	1069.4	1077.0	1069.4	1060.4	1037.5	993.2	924.3
120°	970.2	1034.1	1085.1	1114.9	1125.5	1129.8	1125.5	1114.9	1085.1	1034.1	970.2
122.5°	1012.8	1073.2	1122.6	1159.2	1176.6	1180.9	1176.6	1159.2	1122.6	1073.2	1012.8
125°	1072.4	1129.8	1180.9	1217.0	1236.2	1246.8	1236.2	1217.0	1180.9	1129.8	1072.4
127.5°	1124.3	1186.4	1233.2	1266.0	1284.7	1293.2	1284.7	1266.0	1233.2	1186.4	1124.3
130°	1153.2	1217.0	1263.8	1300.0	1317.0	1325.5	1317.0	1300.0	1263.8	1217.0	1153.2
132.5°	1175.3	1242.6	1291.1	1323.8	1342.6	1351.1	1342.6	1323.8	1291.1	1242.6	1175.3
135°	1202.1	1272.4	1323.4	1355.3	1372.4	1380.9	1372.4	1355.3	1323.4	1272.4	1202.1
137.5°	1225.5	1289.4	1342.6	1376.2	1391.5	1397.0	1391.5	1376.2	1342.6	1289.4	1225.5
140°	1242.6	1297.9	1351.1	1383.0	1400.0	1402.1	1400.0	1383.0	1351.1	1297.9	1242.6
142.5°	1264.7	1308.1	1354.5	1386.4	1403.4	1407.2	1403.4	1386.4	1354.5	1308.1	1264.7
145°	1304.3	1329.8	1361.7	1391.5	1406.4	1410.7	1406.4	1391.5	1361.7	1329.8	1304.3
147.5°	1354.1	1362.1	1378.7	1398.3	1412.8	1415.8	1412.8	1398.3	1378.7	1362.1	1354.1
150°	1391.5	1389.4	1395.8	1408.5	1421.3	1419.2	1421.3	1408.5	1395.8	1389.4	1391.5
152.5°	1434.1	1421.7	1421.3	1427.2	1433.2	1432.8	1433.2	1427.2	1421.3	1421.7	1434.1
155°	1506.4	1483.0	1470.2	1466.0	1466.0	1463.8	1466.0	1466.0	1470.2	1483.0	1506.4
157.5°	1586.0	1553.2	1534.1	1523.8	1520.9	1516.2	1520.9	1523.8	1534.1	1553.2	1586.0
160°	1640.4	1604.3	1585.1	1568.1	1561.7	1555.3	1561.7	1568.1	1585.1	1604.3	1640.4
162.5°	1691.5	1657.0	1636.2	1620.9	1614.5	1604.7	1614.5	1620.9	1636.2	1657.0	1691.5
165°	1774.5	1738.3	1714.9	1702.1	1693.6	1685.1	1693.6	1702.1	1714.9	1738.3	1774.5
167.5°	1857.5	1817.9	1802.6	1788.1	1780.0	1764.7	1780.0	1788.1	1802.6	1817.9	1857.5
170°	1908.5	1872.4	1863.8	1851.1	1836.2	1819.2	1836.2	1851.1	1863.8	1872.4	1908.5
172.5°	1952.8	1928.5	1920.0	1907.3	1902.6	1889.0	1902.6	1907.3	1920.0	1928.5	1952.8
175°	2017.0	1997.9	1997.9	1995.8	1989.4	1976.6	1989.4	1995.8	1997.9	1997.9	2017.0
177.5°	2070.7	2060.4	2067.3	2067.3	2065.6	2053.6	2065.6	2067.3	2067.3	2060.4	2070.7
180°	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4	2106.4



TEST NUMBER: P1428304

CATALOG NUMBER: SQ2W-PR1-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1037.7	1037.7	1037.7	1037.7
2.5°	1042.2	1044.7	1039.1	1033.4
5°	1046.5	1048.4	1040.4	1032.4
7.5°	1055.8	1054.9	1043.6	1032.2
10°	1060.6	1058.6	1045.0	1031.3
12.5°	1056.4	1058.0	1042.1	1026.3
15°	1041.2	1048.8	1030.0	1011.2
17.5°	1017.2	1024.1	1004.4	984.8
20°	1001.7	1006.4	987.1	967.9
22.5°	988.2	991.2	971.9	952.6
25°	965.0	964.7	947.8	930.8
27.5°	934.5	927.9	918.0	908.0
30°	913.9	901.7	895.1	888.5
32.5°	892.5	875.3	871.3	867.4
35°	861.0	839.1	835.8	832.5
37.5°	822.5	804.5	797.8	791.0
40°	795.1	783.1	771.8	760.5
42.5°	762.1	759.4	741.4	723.3
45°	699.2	713.2	688.7	664.3
47.5°	618.5	644.9	619.8	594.7
50°	559.6	589.4	569.2	549.0
52.5°	502.0	531.6	517.0	502.4
55°	418.2	445.6	438.0	430.5
57.5°	348.1	374.1	369.3	364.5
60°	305.0	331.3	328.0	324.7
62.5°	268.0	293.4	290.9	288.3
65°	220.0	241.6	239.3	236.9
67.5°	180.7	198.6	197.3	196.1
70°	157.6	173.4	172.9	172.4
72.5°	135.9	149.9	150.6	151.3
75°	105.1	116.7	118.1	119.5
77.5°	76.6	86.3	87.8	89.3
80°	58.5	66.1	67.9	69.8
82.5°	42.2	46.8	49.4	52.0
85°	20.1	20.7	23.0	25.4
87.5°	13.0	11.5	9.7	8.0
90°	38.3	23.4	14.9	6.4
92.5°	82.6	57.4	40.4	23.4
95°	166.0	131.9	93.6	66.0
97.5°	264.3	209.4	171.5	126.0
100°	317.0	263.8	227.7	178.7
102.5°	374.9	330.2	280.4	231.5
105°	478.7	423.4	366.0	310.6
107.5°	574.9	514.0	445.1	395.3
110°	636.2	570.2	497.9	453.2



TEST NUMBER: P1428304

CATALOG NUMBER: SQ2W-PR1-K-150U-050D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	695.8	628.1	554.0	509.4
115°	776.6	702.1	634.0	595.8
117.5°	854.5	777.9	706.0	675.8
120°	902.1	825.5	755.3	731.9
122.5°	941.3	866.4	801.3	791.5
125°	1000.0	923.4	868.1	880.9
127.5°	1047.7	977.5	942.6	971.1
130°	1076.6	1014.9	993.6	1034.1
132.5°	1102.1	1054.1	1044.7	1100.4
135°	1140.4	1112.8	1121.3	1197.9
137.5°	1186.0	1175.3	1203.8	1300.4
140°	1214.9	1221.3	1261.7	1370.2
142.5°	1254.1	1268.9	1321.3	1436.6
145°	1314.9	1346.8	1414.9	1529.8
147.5°	1383.8	1425.1	1509.4	1627.2
150°	1429.8	1483.0	1572.4	1685.1
152.5°	1482.6	1537.5	1626.8	1741.3
155°	1563.8	1625.5	1719.2	1817.0
157.5°	1646.8	1709.8	1799.2	1884.7
160°	1697.9	1766.0	1846.8	1925.6
162.5°	1755.8	1818.7	1889.4	1959.6
165°	1840.4	1891.5	1949.0	2008.5
167.5°	1911.5	1954.1	1999.2	2045.6
170°	1957.5	1991.5	2029.8	2066.0
172.5°	1996.6	2023.8	2051.9	2083.0
175°	2049.0	2063.8	2080.9	2100.0
177.5°	2089.4	2094.5	2099.6	2108.1
180°	2106.4	2106.4	2106.4	2106.4

TEST NUMBER: P1428304
 CATALOG NUMBER: SQ2W-PR1-K-150U-050D-L940-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.07	14.75	15.20	15.87	17.41	10.44	11.12	11.57	12.24	13.78
	3H	15.27	15.87	16.40	17.00	18.56	11.59	12.20	12.73	13.32	14.88
	4H	15.74	16.32	16.89	17.44	19.01	12.05	12.62	13.19	13.75	15.31
	6H	16.03	16.56	17.18	17.69	19.26	12.38	12.91	13.53	14.03	15.61
	8H	16.13	16.63	17.28	17.77	19.34	12.51	13.01	13.66	14.15	15.73
	12H	16.16	16.64	17.32	17.77	19.37	12.54	13.01	13.69	14.15	15.74
4H	2H	14.15	14.73	15.31	15.85	17.42	11.13	11.71	12.28	12.83	14.40
	3H	15.60	16.08	16.75	17.23	18.80	12.47	12.95	13.63	14.10	15.68
	4H	16.22	16.66	17.38	17.80	19.40	13.01	13.45	14.17	14.59	16.19
	6H	16.64	17.02	17.81	18.18	19.77	13.43	13.81	14.59	14.97	16.56
	8H	16.80	17.15	17.96	18.30	19.91	13.61	13.96	14.77	15.11	16.72
	12H	16.85	17.17	18.03	18.34	19.95	13.65	13.97	14.83	15.13	16.74
8H	4H	16.23	16.58	17.39	17.74	19.34	13.32	13.67	14.49	14.83	16.43
	6H	16.76	17.05	17.94	18.24	19.84	13.86	14.15	15.04	15.34	16.94
	8H	16.99	17.25	18.18	18.42	20.04	14.12	14.37	15.31	15.54	17.17
	12H	17.10	17.33	18.29	18.50	20.15	14.21	14.43	15.40	15.60	17.25
12H	4H	16.18	16.50	17.36	17.66	19.27	13.33	13.65	14.51	14.82	16.43
	6H	16.75	17.00	17.94	18.17	19.80	13.93	14.18	15.12	15.35	16.98
	8H	16.99	17.21	18.18	18.38	20.04	14.21	14.43	15.40	15.60	17.26