

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428358

Luminaire Tested: SQ2W-PW1-K-025U-075D-L940-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1428358
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-8)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PW1-K-025U-075D-L940-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE WAVES LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 250 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4580.6 lumens
Efficiency: N/A
Efficacy: 133.9 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.23
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 34.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1428358

CATALOG NUMBER: SQ2W-PW1-K-025U-075D-L940-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

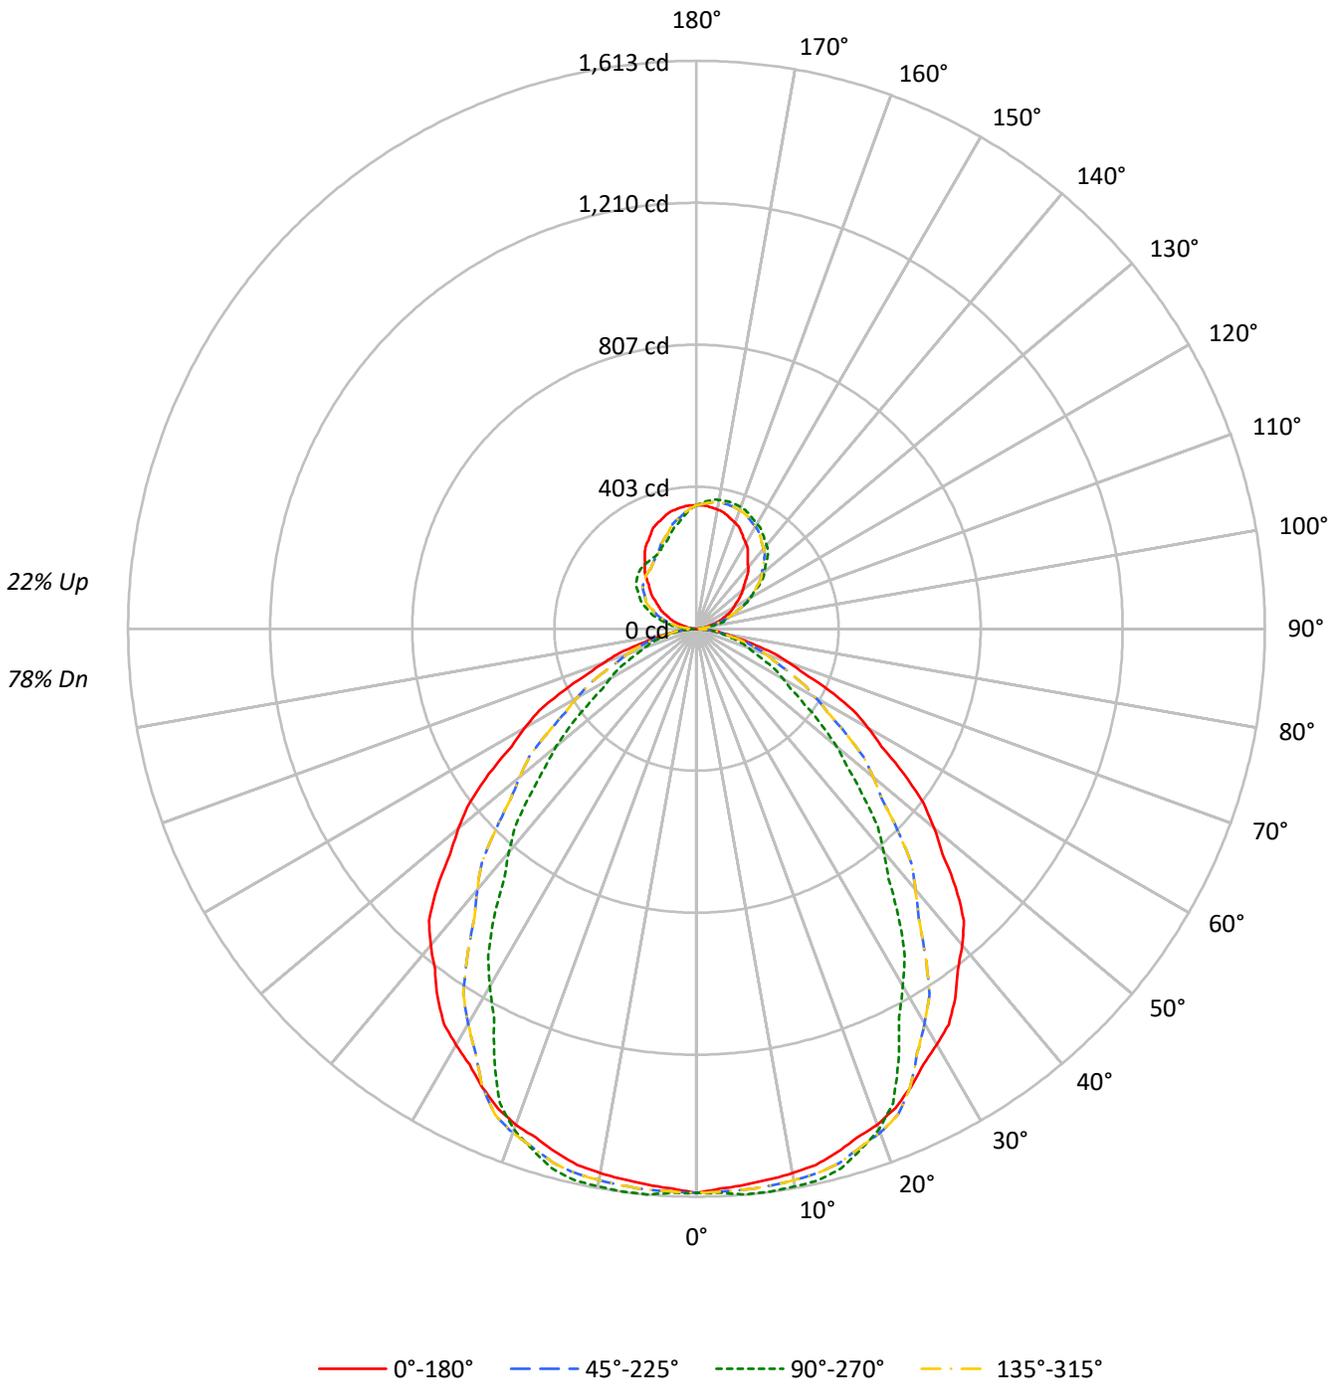



TEST NUMBER: P1428358

CATALOG NUMBER: SQ2W-PW1-K-025U-075D-L940-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	114	114	114	114	108	108	108	108	99	99	99	90	90	90	82	82	82	78				78
1	105	101	97	94	100	96	93	90	88	86	83	80	79	77	74	72	71	67				67
2	96	89	83	78	92	85	80	75	78	74	70	72	68	66	66	63	61	58				58
3	88	79	72	66	84	76	69	64	70	65	60	64	60	56	59	56	53	50				50
4	81	71	63	57	78	68	61	55	63	57	52	58	53	49	53	49	46	44				44
5	75	64	55	50	72	61	54	48	57	50	46	52	47	43	48	44	41	38				38
6	70	58	49	44	66	55	48	43	51	45	40	48	42	38	44	40	36	34				34
7	65	52	44	39	62	51	43	38	47	41	36	44	38	34	41	36	33	31				31
8	60	48	40	35	58	46	39	34	43	37	32	40	35	31	38	33	30	28				28
9	56	44	36	31	54	43	36	31	40	34	29	37	32	28	35	30	27	25				25
10	53	41	33	28	51	39	33	28	37	31	27	35	29	26	32	28	25	23				23

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	25868	25868	25868	25868
5°	25695	26141	25695	26141
10°	25743	26367	25743	26367
15°	25736	26527	25736	26527
20°	25747	26008	25747	26008
25°	25607	24166	25607	24166
30°	25433	21848	25433	21848
35°	25233	19730	25233	19730
40°	24731	17430	24731	17430
45°	23763	15225	23763	15225
50°	22116	13031	22116	13031
55°	20231	10567	20231	10567
60°	18131	9116	18131	9116
65°	15855	8103	15855	8103
70°	12968	7345	12968	7345
75°	10087	6756	10087	6756
80°	7522	5960	7522	5960
85°	5094	3390	5094	3390

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 23763 cd/sqm



TEST NUMBER: P1428358

CATALOG NUMBER: SQ2W-PW1-K-025U-075D-L940-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	152.6	3.3
10°-20°	442.1	9.7
20°-30°	650.5	14.2
30°-40°	711.3	15.5
40°-50°	638.1	13.9
50°-60°	476.0	10.4
60°-70°	300.8	6.6
70°-80°	149.0	3.3
80°-90°	36.3	0.8
90°-100°	27.9	0.6
100°-110°	81.4	1.8
110°-120°	132.8	2.9
120°-130°	168.5	3.7
130°-140°	180.3	3.9
140°-150°	168.4	3.7
150°-160°	138.6	3.0
160°-170°	92.9	2.0
170°-180°	33.0	0.7
0°-30°	1245.2	27.2
0°-40°	1956.4	42.7
0°-60°	3070.5	67.0
0°-90°	3556.7	77.6
90°-120°	242.1	5.3
90°-150°	759.4	16.6
90°-180°	1024.0	22.4
0°-180°	4580.6	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1602	1602	1602	1602	1602	
5°	1585	1613	1585	1613	1585	151
15°	1540	1587	1540	1587	1540	435
25°	1437	1356	1437	1356	1437	662
35°	1280	1001	1280	1001	1280	798
45°	1041	667	1041	667	1041	798
55°	719	375	719	375	719	642
65°	415	212	415	212	415	411
75°	162	108	162	108	162	178
85°	28	18	28	18	28	35
90°	1	8	1	15	1	2
95°	11	8	11	48	11	13
105°	52	83	52	114	52	55
115°	99	137	99	169	99	98
125°	147	218	147	208	147	131
135°	199	285	199	230	199	154
145°	255	329	255	235	255	159
155°	302	357	302	244	302	139
165°	334	372	334	280	334	94
175°	350	364	350	329	350	33
180°	351	351	351	351	351	



TEST NUMBER: P1428358

CATALOG NUMBER: SQ2W-PW1-K-025U-075D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2
2.5°	1591.2	1600.5	1609.7	1607.5	1601.5	1598.8	1599.4	1600.2	1601.8	1603.4	1601.8
5°	1585.4	1597.0	1608.5	1606.8	1600.7	1598.0	1598.7	1600.7	1606.8	1612.9	1606.8
7.5°	1577.5	1589.2	1600.8	1600.3	1595.7	1594.5	1596.8	1600.0	1606.0	1612.0	1606.0
10°	1570.2	1582.4	1594.6	1594.6	1590.5	1590.2	1593.6	1597.5	1602.9	1608.3	1602.9
12.5°	1560.4	1573.2	1585.9	1586.9	1583.9	1584.3	1588.3	1592.6	1598.0	1603.4	1598.0
15°	1539.7	1553.2	1566.8	1569.7	1569.0	1571.0	1575.8	1580.2	1583.6	1587.0	1583.6
17.5°	1515.5	1529.1	1542.7	1545.3	1544.4	1544.5	1545.8	1547.1	1548.7	1550.3	1548.7
20°	1498.5	1512.0	1525.6	1527.4	1525.4	1522.0	1517.3	1513.7	1513.7	1513.7	1513.7
22.5°	1474.0	1488.7	1503.3	1503.4	1498.7	1489.9	1477.0	1466.2	1461.9	1457.6	1461.9
25°	1437.4	1451.7	1465.9	1459.3	1445.7	1425.7	1399.3	1376.9	1366.7	1356.5	1366.7
27.5°	1394.7	1406.2	1417.7	1400.5	1373.6	1341.4	1303.8	1272.1	1258.0	1243.9	1258.0
30°	1364.2	1373.0	1381.8	1354.5	1315.2	1274.8	1233.5	1199.0	1185.5	1171.9	1185.5
32.5°	1332.4	1335.8	1339.2	1303.2	1254.1	1208.1	1165.1	1129.2	1114.5	1099.9	1114.5
35°	1280.2	1274.1	1268.0	1220.2	1158.5	1106.0	1062.5	1026.8	1013.9	1001.0	1013.9
37.5°	1218.6	1200.4	1182.2	1128.4	1062.6	1007.0	961.5	923.9	909.7	895.4	909.7
40°	1173.4	1147.7	1121.9	1064.1	995.6	938.6	893.2	855.5	841.3	827.0	841.3
42.5°	1123.4	1091.1	1058.8	999.4	930.9	873.9	828.5	790.7	775.9	761.1	775.9
45°	1040.7	1002.7	964.7	902.8	833.0	776.0	731.9	695.3	681.1	666.8	681.1
47.5°	947.6	909.9	872.2	810.5	740.7	684.5	641.8	606.7	594.5	582.3	594.5
50°	880.5	843.8	807.2	748.2	681.7	627.2	584.4	548.7	533.7	518.8	533.7
52.5°	812.1	779.3	746.4	689.6	624.8	570.5	526.6	488.7	468.4	448.0	468.4
55°	718.7	687.5	656.3	602.7	541.7	486.8	437.9	398.4	386.9	375.4	386.9
57.5°	622.6	595.6	568.6	520.4	465.2	415.5	371.1	335.5	326.0	316.5	326.0
60°	561.5	537.8	514.1	467.9	414.4	368.9	331.6	301.3	291.8	282.3	291.8
62.5°	502.9	481.9	460.9	416.7	364.7	323.9	294.2	270.0	262.1	254.2	262.1
65°	415.0	399.5	383.9	347.4	304.0	270.1	245.7	225.7	218.9	212.1	218.9
67.5°	329.6	320.9	312.2	284.9	251.4	224.0	202.5	185.3	180.9	176.4	180.9
70°	274.7	272.0	269.2	246.7	217.5	194.1	176.5	162.4	159.0	155.6	159.0
72.5°	227.1	228.1	229.2	210.5	185.1	165.5	151.7	140.7	138.4	136.1	138.4
75°	161.7	167.2	172.6	160.2	141.9	128.0	118.5	111.1	109.7	108.3	109.7
77.5°	110.2	118.3	126.4	118.4	105.0	94.7	87.7	82.1	81.0	80.0	81.0
80°	80.9	89.0	97.2	91.6	81.4	73.6	68.2	64.1	64.1	64.1	64.1
82.5°	56.5	63.0	69.5	65.5	58.1	53.0	50.3	48.2	48.2	48.2	48.2
85°	27.5	30.9	34.2	33.1	30.3	27.0	22.9	19.7	19.0	18.3	19.0
87.5°	7.5	9.4	11.4	10.1	7.6	6.0	5.5	5.1	5.2	5.2	5.2
90°	1.1	2.5	4.3	5.7	6.7	7.1	7.1	7.4	7.8	7.8	7.8
92.5°	3.9	6.2	6.2	6.2	7.6	8.2	8.8	8.9	9.2	9.2	9.2
95°	11.0	12.0	18.1	17.7	12.0	9.6	8.1	8.1	8.1	8.1	8.1
97.5°	21.0	22.5	23.5	31.5	33.3	32.2	26.2	22.0	19.7	18.6	19.7
100°	29.8	30.5	32.6	32.9	41.8	50.3	46.0	40.7	39.0	37.9	39.0
102.5°	38.5	39.0	42.2	43.7	45.8	50.6	65.3	63.7	62.5	62.3	62.5
105°	51.7	52.1	58.1	60.9	62.3	62.3	62.0	69.1	80.4	82.9	80.4
107.5°	65.8	67.4	74.5	82.1	83.7	84.2	82.3	81.3	80.8	81.1	80.8
110°	75.4	77.9	86.4	96.0	98.5	99.2	98.5	97.4	96.7	96.7	96.7



TEST NUMBER: P1428358

CATALOG NUMBER: SQ2W-PW1-K-025U-075D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	84.8	88.4	98.0	109.0	113.2	115.3	113.8	113.0	112.3	112.9	112.3
115°	99.2	104.5	117.2	128.6	137.1	138.1	137.8	137.8	137.4	137.4	137.4
117.5°	112.5	121.0	135.3	148.5	158.3	161.2	162.6	162.2	161.7	162.4	161.7
120°	121.9	131.8	148.1	162.9	172.5	176.8	178.2	177.5	178.2	177.5	178.2
122.5°	131.8	144.0	160.0	175.4	186.7	191.5	193.2	193.3	193.5	193.1	193.5
125°	146.6	161.5	180.3	196.2	207.9	213.6	215.0	215.4	216.1	217.8	216.1
127.5°	161.7	178.5	199.1	214.5	226.5	233.4	235.6	236.3	237.8	238.6	237.8
130°	172.2	191.3	212.2	226.7	238.4	245.8	249.7	250.8	252.6	252.2	252.6
132.5°	183.2	203.2	224.4	239.5	250.3	258.3	261.6	264.7	265.3	265.8	265.3
135°	199.4	221.0	242.3	257.2	267.4	275.2	279.5	282.3	284.1	285.1	284.1
137.5°	216.5	239.3	259.7	273.0	283.3	290.0	294.9	297.8	299.7	300.5	299.7
140°	228.1	250.1	269.9	283.7	292.9	299.7	303.9	307.5	309.6	309.6	309.6
142.5°	239.2	260.9	280.1	293.9	302.0	308.2	312.7	315.4	317.8	317.8	317.8
145°	254.7	276.3	294.0	307.8	314.6	320.2	325.2	327.3	328.7	328.7	328.7
147.5°	270.9	290.0	306.2	319.4	325.1	331.8	335.7	337.4	339.1	338.4	339.1
150°	280.5	298.3	313.8	326.2	331.9	338.3	342.2	343.6	345.4	344.3	345.4
152.5°	289.9	306.8	320.9	332.5	337.3	343.7	348.1	349.5	350.8	350.0	350.8
155°	302.5	317.4	330.5	341.1	345.4	351.4	355.6	357.4	358.8	357.1	358.8
157.5°	313.8	326.6	338.0	347.8	352.3	357.5	361.4	363.6	365.1	364.3	365.1
160°	320.6	332.3	342.5	351.7	356.0	360.6	364.9	367.3	368.7	367.7	368.7
162.5°	326.2	336.8	346.5	354.9	358.5	362.6	367.7	369.9	371.3	370.0	371.3
165°	334.4	342.9	351.4	358.5	361.7	364.9	370.2	372.6	373.7	372.3	373.7
167.5°	340.6	347.1	353.9	360.0	362.4	365.5	370.8	372.9	374.2	372.4	374.2
170°	344.0	349.6	355.6	360.6	362.4	365.2	370.5	372.3	373.4	371.6	373.4
172.5°	346.8	351.0	355.9	360.3	361.2	363.5	368.5	370.3	371.1	369.6	371.1
175°	349.6	352.1	355.6	358.5	358.1	359.5	363.8	365.2	366.6	364.5	366.6
177.5°	351.0	352.1	353.2	354.9	353.8	353.8	356.9	357.8	358.0	356.9	358.0
180°	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7



TEST NUMBER: P1428358

CATALOG NUMBER: SQ2W-PW1-K-025U-075D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2
2.5°	1600.2	1599.4	1598.8	1601.5	1607.5	1609.7	1600.5	1591.2	1600.5	1609.7	1607.5
5°	1600.7	1598.7	1598.0	1600.7	1606.8	1608.5	1597.0	1585.4	1597.0	1608.5	1606.8
7.5°	1600.0	1596.8	1594.5	1595.7	1600.3	1600.8	1589.2	1577.5	1589.2	1600.8	1600.3
10°	1597.5	1593.6	1590.2	1590.5	1594.6	1594.6	1582.4	1570.2	1582.4	1594.6	1594.6
12.5°	1592.6	1588.3	1584.3	1583.9	1586.9	1585.9	1573.2	1560.4	1573.2	1585.9	1586.9
15°	1580.2	1575.8	1571.0	1569.0	1569.7	1566.8	1553.2	1539.7	1553.2	1566.8	1569.7
17.5°	1547.1	1545.8	1544.5	1544.4	1545.3	1542.7	1529.1	1515.5	1529.1	1542.7	1545.3
20°	1513.7	1517.3	1522.0	1525.4	1527.4	1525.6	1512.0	1498.5	1512.0	1525.6	1527.4
22.5°	1466.2	1477.0	1489.9	1498.7	1503.4	1503.3	1488.7	1474.0	1488.7	1503.3	1503.4
25°	1376.9	1399.3	1425.7	1445.7	1459.3	1465.9	1451.7	1437.4	1451.7	1465.9	1459.3
27.5°	1272.1	1303.8	1341.4	1373.6	1400.5	1417.7	1406.2	1394.7	1406.2	1417.7	1400.5
30°	1199.0	1233.5	1274.8	1315.2	1354.5	1381.8	1373.0	1364.2	1373.0	1381.8	1354.5
32.5°	1129.2	1165.1	1208.1	1254.1	1303.2	1339.2	1335.8	1332.4	1335.8	1339.2	1303.2
35°	1026.8	1062.5	1106.0	1158.5	1220.2	1268.0	1274.1	1280.2	1274.1	1268.0	1220.2
37.5°	923.9	961.5	1007.0	1062.6	1128.4	1182.2	1200.4	1218.6	1200.4	1182.2	1128.4
40°	855.5	893.2	938.6	995.6	1064.1	1121.9	1147.7	1173.4	1147.7	1121.9	1064.1
42.5°	790.7	828.5	873.9	930.9	999.4	1058.8	1091.1	1123.4	1091.1	1058.8	999.4
45°	695.3	731.9	776.0	833.0	902.8	964.7	1002.7	1040.7	1002.7	964.7	902.8
47.5°	606.7	641.8	684.5	740.7	810.5	872.2	909.9	947.6	909.9	872.2	810.5
50°	548.7	584.4	627.2	681.7	748.2	807.2	843.8	880.5	843.8	807.2	748.2
52.5°	488.7	526.6	570.5	624.8	689.6	746.4	779.3	812.1	779.3	746.4	689.6
55°	398.4	437.9	486.8	541.7	602.7	656.3	687.5	718.7	687.5	656.3	602.7
57.5°	335.5	371.1	415.5	465.2	520.4	568.6	595.6	622.6	595.6	568.6	520.4
60°	301.3	331.6	368.9	414.4	467.9	514.1	537.8	561.5	537.8	514.1	467.9
62.5°	270.0	294.2	323.9	364.7	416.7	460.9	481.9	502.9	481.9	460.9	416.7
65°	225.7	245.7	270.1	304.0	347.4	383.9	399.5	415.0	399.5	383.9	347.4
67.5°	185.3	202.5	224.0	251.4	284.9	312.2	320.9	329.6	320.9	312.2	284.9
70°	162.4	176.5	194.1	217.5	246.7	269.2	272.0	274.7	272.0	269.2	246.7
72.5°	140.7	151.7	165.5	185.1	210.5	229.2	228.1	227.1	228.1	229.2	210.5
75°	111.1	118.5	128.0	141.9	160.2	172.6	167.2	161.7	167.2	172.6	160.2
77.5°	82.1	87.7	94.7	105.0	118.4	126.4	118.3	110.2	118.3	126.4	118.4
80°	64.1	68.2	73.6	81.4	91.6	97.2	89.0	80.9	89.0	97.2	91.6
82.5°	48.2	50.3	53.0	58.1	65.5	69.5	63.0	56.5	63.0	69.5	65.5
85°	19.7	22.9	27.0	30.3	33.1	34.2	30.9	27.5	30.9	34.2	33.1
87.5°	5.1	5.5	6.0	7.6	10.1	11.4	9.4	7.5	9.4	11.4	10.2
90°	7.4	7.1	7.1	6.7	5.7	4.3	2.5	1.1	2.5	3.9	6.4
92.5°	8.9	8.8	8.2	7.6	6.2	6.2	6.2	3.9	6.7	9.6	13.7
95°	8.1	8.1	9.6	12.0	17.7	18.1	12.0	11.0	15.6	22.0	27.6
97.5°	22.0	26.2	32.2	33.3	31.5	23.5	22.5	21.0	28.6	34.9	44.0
100°	40.7	46.0	50.3	41.8	32.9	32.6	30.5	29.8	37.9	43.9	52.8
102.5°	63.7	65.3	50.6	45.8	43.7	42.2	39.0	38.5	46.7	55.0	62.4
105°	69.1	62.0	62.3	62.3	60.9	58.1	52.1	51.7	60.9	70.5	79.7
107.5°	81.3	82.3	84.2	83.7	82.1	74.5	67.4	65.8	74.1	85.6	95.7
110°	97.4	98.5	99.2	98.5	96.0	86.4	77.9	75.4	82.9	94.9	105.9



TEST NUMBER: P1428358

CATALOG NUMBER: SQ2W-PW1-K-025U-075D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	113.0	113.8	115.3	113.2	109.0	98.0	88.4	84.8	92.2	104.6	115.8
115°	137.8	137.8	138.1	137.1	128.6	117.2	104.5	99.2	105.6	116.9	129.3
117.5°	162.2	162.6	161.2	158.3	148.5	135.3	121.0	112.5	117.5	129.5	142.3
120°	177.5	178.2	176.8	172.5	162.9	148.1	131.8	121.9	125.7	137.4	150.2
122.5°	193.3	193.2	191.5	186.7	175.4	160.0	144.0	131.8	133.4	144.2	156.7
125°	215.4	215.0	213.6	207.9	196.2	180.3	161.5	146.6	144.5	153.7	166.5
127.5°	236.3	235.6	233.4	226.5	214.5	199.1	178.5	161.7	156.9	162.7	174.4
130°	250.8	249.7	245.8	238.4	226.7	212.2	191.3	172.2	165.4	169.0	179.2
132.5°	264.7	261.6	258.3	250.3	239.5	224.4	203.2	183.2	173.9	175.5	183.5
135°	282.3	279.5	275.2	267.4	257.2	242.3	221.0	199.4	186.7	185.3	189.9
137.5°	297.8	294.9	290.0	283.3	273.0	259.7	239.3	216.5	200.4	195.7	197.4
140°	307.5	303.9	299.7	292.9	283.7	269.9	250.1	228.1	210.1	203.3	202.3
142.5°	315.4	312.7	308.2	302.0	293.9	280.1	260.9	239.2	220.0	211.3	208.8
145°	327.3	325.2	320.2	314.6	307.8	294.0	276.3	254.7	235.6	224.2	218.9
147.5°	337.4	335.7	331.8	325.1	319.4	306.2	290.0	270.9	251.3	237.3	230.4
150°	343.6	342.2	338.3	331.9	326.2	313.8	298.3	280.5	261.8	246.9	238.0
152.5°	349.5	348.1	343.7	337.3	332.5	320.9	306.8	289.9	270.8	256.0	246.8
155°	357.4	355.6	351.4	345.4	341.1	330.5	317.4	302.5	286.2	270.6	260.4
157.5°	363.6	361.4	357.5	352.3	347.8	338.0	326.6	313.8	299.5	284.7	274.2
160°	367.3	364.9	360.6	356.0	351.7	342.5	332.3	320.6	307.5	294.0	282.7
162.5°	369.9	367.7	362.6	358.5	354.9	346.5	336.8	326.2	314.6	302.8	292.3
165°	372.6	370.2	364.9	361.7	358.5	351.4	342.9	334.4	324.5	314.9	306.4
167.5°	372.9	370.8	365.5	362.4	360.0	353.9	347.1	340.6	332.8	325.3	318.2
170°	372.3	370.5	365.2	362.4	360.6	355.6	349.6	344.0	337.9	331.6	325.9
172.5°	370.3	368.5	363.5	361.2	360.3	355.9	351.0	346.8	341.6	336.9	332.4
175°	365.2	363.8	359.5	358.1	358.5	355.6	352.1	349.6	346.4	343.6	341.1
177.5°	357.8	356.9	353.8	353.8	354.9	353.2	352.1	351.0	349.5	348.7	347.8
180°	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7



TEST NUMBER: P1428358

CATALOG NUMBER: SQ2W-PW1-K-025U-075D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2	1602.2
2.5°	1601.5	1598.8	1599.4	1600.2	1601.8	1603.4	1601.8	1600.2	1599.4	1598.8	1601.5
5°	1600.7	1598.0	1598.7	1600.7	1606.8	1612.9	1606.8	1600.7	1598.7	1598.0	1600.7
7.5°	1595.7	1594.5	1596.8	1600.0	1606.0	1612.0	1606.0	1600.0	1596.8	1594.5	1595.7
10°	1590.5	1590.2	1593.6	1597.5	1602.9	1608.3	1602.9	1597.5	1593.6	1590.2	1590.5
12.5°	1583.9	1584.3	1588.3	1592.6	1598.0	1603.4	1598.0	1592.6	1588.3	1584.3	1583.9
15°	1569.0	1571.0	1575.8	1580.2	1583.6	1587.0	1583.6	1580.2	1575.8	1571.0	1569.0
17.5°	1544.4	1544.5	1545.8	1547.1	1548.7	1550.3	1548.7	1547.1	1545.8	1544.5	1544.4
20°	1525.4	1522.0	1517.3	1513.7	1513.7	1513.7	1513.7	1513.7	1517.3	1522.0	1525.4
22.5°	1498.7	1489.9	1477.0	1466.2	1461.9	1457.6	1461.9	1466.2	1477.0	1489.9	1498.7
25°	1445.7	1425.7	1399.3	1376.9	1366.7	1356.5	1366.7	1376.9	1399.3	1425.7	1445.7
27.5°	1373.6	1341.4	1303.8	1272.1	1258.0	1243.9	1258.0	1272.1	1303.8	1341.4	1373.6
30°	1315.2	1274.8	1233.5	1199.0	1185.5	1171.9	1185.5	1199.0	1233.5	1274.8	1315.2
32.5°	1254.1	1208.1	1165.1	1129.2	1114.5	1099.9	1114.5	1129.2	1165.1	1208.1	1254.1
35°	1158.5	1106.0	1062.5	1026.8	1013.9	1001.0	1013.9	1026.8	1062.5	1106.0	1158.5
37.5°	1062.6	1007.0	961.5	923.9	909.7	895.4	909.7	923.9	961.5	1007.0	1062.6
40°	995.6	938.6	893.2	855.5	841.3	827.0	841.3	855.5	893.2	938.6	995.6
42.5°	930.9	873.9	828.5	790.7	775.9	761.1	775.9	790.7	828.5	873.9	930.9
45°	833.0	776.0	731.9	695.3	681.1	666.8	681.1	695.3	731.9	776.0	833.0
47.5°	740.7	684.5	641.8	606.7	594.5	582.3	594.5	606.7	641.8	684.5	740.7
50°	681.7	627.2	584.4	548.7	533.7	518.8	533.7	548.7	584.4	627.2	681.7
52.5°	624.8	570.5	526.6	488.7	468.4	448.0	468.4	488.7	526.6	570.5	624.8
55°	541.7	486.8	437.9	398.4	386.9	375.4	386.9	398.4	437.9	486.8	541.7
57.5°	465.2	415.5	371.1	335.5	326.0	316.5	326.0	335.5	371.1	415.5	465.2
60°	414.4	368.9	331.6	301.3	291.8	282.3	291.8	301.3	331.6	368.9	414.4
62.5°	364.7	323.9	294.2	270.0	262.1	254.2	262.1	270.0	294.2	323.9	364.7
65°	304.0	270.1	245.7	225.7	218.9	212.1	218.9	225.7	245.7	270.1	304.0
67.5°	251.4	224.0	202.5	185.3	180.9	176.4	180.9	185.3	202.5	224.0	251.4
70°	217.5	194.1	176.5	162.4	159.0	155.6	159.0	162.4	176.5	194.1	217.5
72.5°	185.1	165.5	151.7	140.7	138.4	136.1	138.4	140.7	151.7	165.5	185.1
75°	141.9	128.0	118.5	111.1	109.7	108.3	109.7	111.1	118.5	128.0	141.9
77.5°	105.0	94.7	87.7	82.1	81.0	80.0	81.0	82.1	87.7	94.7	105.0
80°	81.4	73.6	68.2	64.1	64.1	64.1	64.1	64.1	68.2	73.6	81.4
82.5°	58.1	53.0	50.3	48.2	48.2	48.2	48.2	48.2	50.3	53.0	58.1
85°	30.3	27.0	22.9	19.7	19.0	18.3	19.0	19.7	22.9	27.0	30.3
87.5°	7.9	6.7	6.7	6.6	6.9	6.7	6.9	6.6	6.7	6.7	7.9
90°	8.1	10.6	13.1	14.5	15.9	15.2	15.9	14.5	13.1	10.6	8.1
92.5°	16.4	20.5	23.6	26.1	27.3	27.1	27.3	26.1	23.6	20.5	16.4
95°	32.9	37.9	42.9	46.4	48.5	47.8	48.5	46.4	42.9	37.9	32.9
97.5°	50.8	57.5	63.0	66.3	68.4	69.9	68.4	66.3	63.0	57.5	50.8
100°	62.7	69.1	75.4	79.3	82.9	84.3	82.9	79.3	75.4	69.1	62.7
102.5°	72.3	80.7	87.6	91.8	94.8	96.2	94.8	91.8	87.6	80.7	72.3
105°	88.2	97.1	104.5	109.8	113.0	114.1	113.0	109.8	104.5	97.1	88.2
107.5°	104.1	113.2	120.1	126.0	129.9	132.1	129.9	126.0	120.1	113.2	104.1
110°	116.5	124.0	131.4	136.7	140.6	142.0	140.6	136.7	131.4	124.0	116.5



TEST NUMBER: P1428358

CATALOG NUMBER: SQ2W-PW1-K-025U-075D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	127.0	135.3	142.8	148.1	152.5	154.5	152.5	148.1	142.8	135.3	127.0
115°	141.7	152.7	159.4	164.4	167.5	169.3	167.5	164.4	159.4	152.7	141.7
117.5°	153.9	165.4	172.7	176.5	178.0	179.3	178.0	176.5	172.7	165.4	153.9
120°	161.5	172.2	180.7	185.6	187.4	188.1	187.4	185.6	180.7	172.2	161.5
122.5°	168.6	178.7	186.9	193.0	195.9	196.6	195.9	193.0	186.9	178.7	168.6
125°	178.5	188.1	196.6	202.6	205.8	207.6	205.8	202.6	196.6	188.1	178.5
127.5°	187.2	197.5	205.3	210.8	213.9	215.3	213.9	210.8	205.3	197.5	187.2
130°	192.0	202.6	210.4	216.4	219.3	220.7	219.3	216.4	210.4	202.6	192.0
132.5°	195.7	206.9	214.9	220.4	223.5	224.9	223.5	220.4	214.9	206.9	195.7
135°	200.1	211.8	220.3	225.6	228.5	229.9	228.5	225.6	220.3	211.8	200.1
137.5°	204.0	214.7	223.5	229.1	231.7	232.6	231.7	229.1	223.5	214.7	204.0
140°	206.9	216.1	224.9	230.2	233.1	233.4	233.1	230.2	224.9	216.1	206.9
142.5°	210.6	217.8	225.5	230.8	233.6	234.3	233.6	230.8	225.5	217.8	210.6
145°	217.1	221.4	226.7	231.7	234.1	234.9	234.1	231.7	226.7	221.4	217.1
147.5°	225.4	226.8	229.5	232.8	235.2	235.7	235.2	232.8	229.5	226.8	225.4
150°	231.7	231.3	232.4	234.5	236.6	236.3	236.6	234.5	232.4	231.3	231.7
152.5°	238.7	236.7	236.6	237.6	238.6	238.5	238.6	237.6	236.6	236.7	238.7
155°	250.8	246.9	244.8	244.1	244.1	243.7	244.1	244.1	244.8	246.9	250.8
157.5°	264.0	258.6	255.4	253.7	253.2	252.4	253.2	253.7	255.4	258.6	264.0
160°	273.1	267.1	263.9	261.1	260.0	258.9	260.0	261.1	263.9	267.1	273.1
162.5°	281.6	275.9	272.4	269.8	268.8	267.2	268.8	269.8	272.4	275.9	281.6
165°	295.4	289.4	285.5	283.4	282.0	280.5	282.0	283.4	285.5	289.4	295.4
167.5°	309.2	302.6	300.1	297.7	296.3	293.8	296.3	297.7	300.1	302.6	309.2
170°	317.7	311.7	310.3	308.2	305.7	302.9	305.7	308.2	310.3	311.7	317.7
172.5°	325.1	321.1	319.7	317.5	316.7	314.5	316.7	317.5	319.7	321.1	325.1
175°	335.8	332.6	332.6	332.3	331.2	329.1	331.2	332.3	332.6	332.6	335.8
177.5°	344.7	343.0	344.2	344.2	343.9	341.9	343.9	344.2	344.2	343.0	344.7
180°	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7	350.7



TEST NUMBER: P1428358

CATALOG NUMBER: SQ2W-PW1-K-025U-075D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1602.2	1602.2	1602.2	1602.2
2.5°	1607.5	1609.7	1600.5	1591.2
5°	1606.8	1608.5	1597.0	1585.4
7.5°	1600.3	1600.8	1589.2	1577.5
10°	1594.6	1594.6	1582.4	1570.2
12.5°	1586.9	1585.9	1573.2	1560.4
15°	1569.7	1566.8	1553.2	1539.7
17.5°	1545.3	1542.7	1529.1	1515.5
20°	1527.4	1525.6	1512.0	1498.5
22.5°	1503.4	1503.3	1488.7	1474.0
25°	1459.3	1465.9	1451.7	1437.4
27.5°	1400.5	1417.7	1406.2	1394.7
30°	1354.5	1381.8	1373.0	1364.2
32.5°	1303.2	1339.2	1335.8	1332.4
35°	1220.2	1268.0	1274.1	1280.2
37.5°	1128.4	1182.2	1200.4	1218.6
40°	1064.1	1121.9	1147.7	1173.4
42.5°	999.4	1058.8	1091.1	1123.4
45°	902.8	964.7	1002.7	1040.7
47.5°	810.5	872.2	909.9	947.6
50°	748.2	807.2	843.8	880.5
52.5°	689.6	746.4	779.3	812.1
55°	602.7	656.3	687.5	718.7
57.5°	520.4	568.6	595.6	622.6
60°	467.9	514.1	537.8	561.5
62.5°	416.7	460.9	481.9	502.9
65°	347.4	383.9	399.5	415.0
67.5°	284.9	312.2	320.9	329.6
70°	246.7	269.2	272.0	274.7
72.5°	210.5	229.2	228.1	227.1
75°	160.2	172.6	167.2	161.7
77.5°	118.4	126.4	118.3	110.2
80°	91.6	97.2	89.0	80.9
82.5°	65.5	69.5	63.0	56.5
85°	33.1	34.2	30.9	27.5
87.5°	10.2	11.4	9.4	7.5
90°	6.4	3.9	2.5	1.1
92.5°	13.7	9.6	6.7	3.9
95°	27.6	22.0	15.6	11.0
97.5°	44.0	34.9	28.6	21.0
100°	52.8	43.9	37.9	29.8
102.5°	62.4	55.0	46.7	38.5
105°	79.7	70.5	60.9	51.7
107.5°	95.7	85.6	74.1	65.8
110°	105.9	94.9	82.9	75.4



TEST NUMBER: P1428358

CATALOG NUMBER: SQ2W-PW1-K-025U-075D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	115.8	104.6	92.2	84.8
115°	129.3	116.9	105.6	99.2
117.5°	142.3	129.5	117.5	112.5
120°	150.2	137.4	125.7	121.9
122.5°	156.7	144.2	133.4	131.8
125°	166.5	153.7	144.5	146.6
127.5°	174.4	162.7	156.9	161.7
130°	179.2	169.0	165.4	172.2
132.5°	183.5	175.5	173.9	183.2
135°	189.9	185.3	186.7	199.4
137.5°	197.4	195.7	200.4	216.5
140°	202.3	203.3	210.1	228.1
142.5°	208.8	211.3	220.0	239.2
145°	218.9	224.2	235.6	254.7
147.5°	230.4	237.3	251.3	270.9
150°	238.0	246.9	261.8	280.5
152.5°	246.8	256.0	270.8	289.9
155°	260.4	270.6	286.2	302.5
157.5°	274.2	284.7	299.5	313.8
160°	282.7	294.0	307.5	320.6
162.5°	292.3	302.8	314.6	326.2
165°	306.4	314.9	324.5	334.4
167.5°	318.2	325.3	332.8	340.6
170°	325.9	331.6	337.9	344.0
172.5°	332.4	336.9	341.6	346.8
175°	341.1	343.6	346.4	349.6
177.5°	347.8	348.7	349.5	351.0
180°	350.7	350.7	350.7	350.7



TEST NUMBER: P1428358
 CATALOG NUMBER: SQ2W-PW1-K-025U-075D-L940-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.50	21.61	21.19	22.31	23.12	16.75	17.86	17.43	18.56	19.37
	3H	21.82	22.81	22.52	23.52	24.37	18.04	19.03	18.74	19.74	20.59
	4H	22.24	23.17	22.96	23.89	24.76	18.56	19.49	19.27	20.21	21.07
	6H	22.43	23.29	23.17	24.02	24.90	18.88	19.74	19.61	20.46	21.34
	8H	22.48	23.30	23.23	24.05	24.93	19.00	19.81	19.74	20.56	21.44
	12H	22.49	23.27	23.24	24.01	24.92	19.03	19.81	19.78	20.55	21.46
4H	2H	20.66	21.60	21.38	22.31	23.18	17.59	18.52	18.31	19.24	20.10
	3H	22.22	23.00	22.96	23.75	24.63	19.06	19.83	19.79	20.59	21.47
	4H	22.78	23.48	23.53	24.24	25.15	19.65	20.35	20.40	21.10	22.01
	6H	23.10	23.71	23.87	24.49	25.41	20.04	20.65	20.81	21.43	22.35
	8H	23.20	23.76	23.97	24.54	25.47	20.20	20.76	20.97	21.54	22.47
	12H	23.23	23.74	24.02	24.54	25.47	20.25	20.76	21.04	21.56	22.49
8H	4H	22.84	23.40	23.61	24.18	25.11	20.01	20.57	20.78	21.35	22.28
	6H	23.27	23.73	24.07	24.55	25.48	20.51	20.97	21.31	21.79	22.73
	8H	23.44	23.85	24.25	24.67	25.62	20.73	21.14	21.54	21.96	22.91
	12H	23.53	23.89	24.34	24.70	25.71	20.82	21.19	21.64	22.00	23.00
12H	4H	22.81	23.31	23.60	24.11	25.05	20.04	20.54	20.83	21.34	22.28
	6H	23.26	23.68	24.07	24.50	25.44	20.58	21.00	21.40	21.82	22.77
	8H	23.46	23.83	24.28	24.64	25.64	20.84	21.20	21.65	22.01	23.02