

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428388

Luminaire Tested: SQ2W-PW1-K-050U-100D-L940-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1428388
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-8)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PW1-K-050U-100D-L940-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE WAVES LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 500 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6793.4 lumens
Efficiency: N/A
Efficacy: 129.4 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.23
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 52.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1428388

CATALOG NUMBER: SQ2W-PW1-K-050U-100D-L940-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

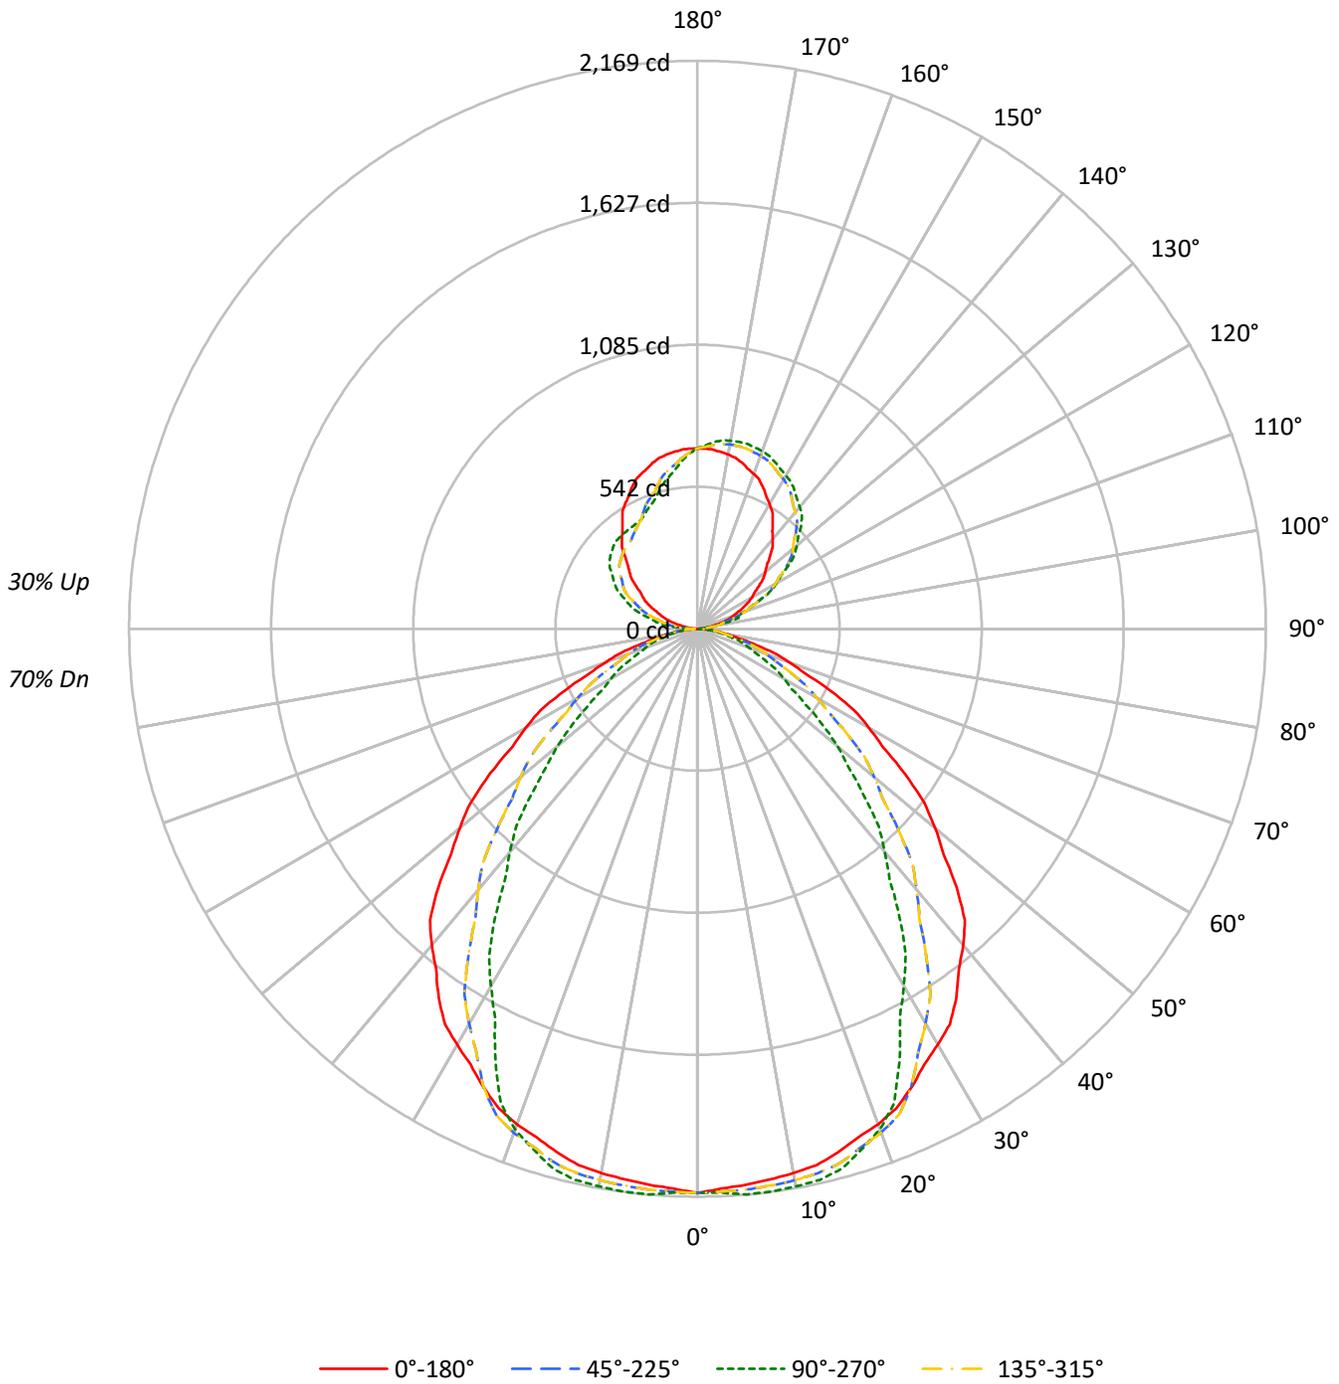



TEST NUMBER: P1428388

CATALOG NUMBER: SQ2W-PW1-K-050U-100D-L940-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20													
RC	80					70					50					30					10					0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0				
RCR	0	112	112	112	112	106	106	106	106	95	95	95	84	84	84	75	75	75	70	70	70	70	70	70	70	70	70	70	70	70	70			
	1	103	99	95	92	98	94	91	88	84	82	80	76	74	72	67	66	65	61	61	61	61	61	61	61	61	61	61	61	61	61			
	2	95	87	82	77	89	83	78	73	75	71	67	67	64	61	60	58	56	52	52	52	52	52	52	52	52	52	52	52	52	52			
	3	87	78	70	65	82	74	67	62	67	62	58	60	56	53	54	51	48	45	45	45	45	45	45	45	45	45	45	45	45	45			
	4	80	69	62	56	75	66	59	54	60	54	50	54	50	46	49	45	42	39	39	39	39	39	39	39	39	39	39	39	39	39			
	5	74	62	54	48	70	59	52	47	54	48	44	49	44	40	44	41	37	35	35	35	35	35	35	35	35	35	35	35	35	35			
	6	68	56	48	42	65	54	46	41	49	43	38	45	40	36	41	37	33	31	31	31	31	31	31	31	31	31	31	31	31	31			
	7	63	51	43	38	60	49	42	37	45	39	34	41	36	32	37	33	30	28	28	28	28	28	28	28	28	28	28	28	28	28			
	8	59	47	39	34	56	45	38	33	41	35	31	38	33	29	34	30	27	25	25	25	25	25	25	25	25	25	25	25	25	25			
	9	55	43	35	30	52	41	34	29	38	32	28	35	30	26	32	28	25	23	23	23	23	23	23	23	23	23	23	23	23	23			
	10	52	40	32	27	49	38	31	27	35	29	25	32	27	24	30	26	23	21	21	21	21	21	21	21	21	21	21	21	21	21			

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	34781	34781	34781	34781
5°	34547	35147	34547	35147
10°	34611	35452	34611	35452
15°	34602	35665	34602	35665
20°	34616	34968	34616	34968
25°	34429	32492	34429	32492
30°	34194	29374	34194	29374
35°	33927	26528	33927	26528
40°	33252	23437	33252	23437
45°	31948	20472	31948	20472
50°	29735	17520	29735	17520
55°	27200	14207	27200	14207
60°	24380	12254	24380	12254
65°	21318	10896	21318	10896
70°	17433	9880	17433	9880
75°	13568	9089	13568	9089
80°	10107	8015	10107	8015
85°	6836	4557	6836	4557

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 31948 cd/sqm



TEST NUMBER: P1428388

CATALOG NUMBER: SQ2W-PW1-K-050U-100D-L940-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	205.1	3.0
10°-20°	594.4	8.7
20°-30°	874.7	12.9
30°-40°	956.3	14.1
40°-50°	857.9	12.6
50°-60°	639.9	9.4
60°-70°	404.5	6.0
70°-80°	200.4	2.9
80°-90°	49.8	0.7
90°-100°	54.8	0.8
100°-110°	159.8	2.4
110°-120°	260.8	3.8
120°-130°	330.9	4.9
130°-140°	354.1	5.2
140°-150°	330.7	4.9
150°-160°	272.1	4.0
160°-170°	182.5	2.7
170°-180°	64.8	1.0
0°-30°	1674.1	24.6
0°-40°	2630.5	38.7
0°-60°	4128.3	60.8
0°-90°	4782.9	70.4
90°-120°	475.4	7.0
90°-150°	1491.1	21.9
90°-180°	2010.0	29.6
0°-180°	6793.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2154	2154	2154	2154	2154	
5°	2132	2169	2132	2169	2132	203
15°	2070	2134	2070	2134	2070	584
25°	1933	1824	1933	1824	1933	890
35°	1721	1346	1721	1346	1721	1074
45°	1399	897	1399	897	1399	1073
55°	966	505	966	505	966	863
65°	558	285	558	285	558	553
75°	218	146	218	146	218	240
85°	37	25	37	25	37	47
90°	2	15	2	30	2	3
95°	22	16	22	94	22	26
105°	102	163	102	224	102	108
115°	195	270	195	332	195	192
125°	288	428	288	408	288	258
135°	392	560	392	451	392	303
145°	500	645	500	461	500	313
155°	594	701	594	478	594	273
165°	657	731	657	551	657	185
175°	686	716	686	646	686	65
180°	689	689	689	689	689	



TEST NUMBER: P1428388

CATALOG NUMBER: SQ2W-PW1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2
2.5°	2139.4	2151.8	2164.2	2161.3	2153.3	2149.6	2150.4	2151.5	2153.6	2155.8	2153.6
5°	2131.6	2147.1	2162.6	2160.3	2152.1	2148.5	2149.4	2152.1	2160.3	2168.6	2160.3
7.5°	2121.0	2136.6	2152.3	2151.6	2145.4	2143.8	2146.9	2151.3	2159.3	2167.3	2159.3
10°	2111.1	2127.5	2143.9	2143.9	2138.5	2138.0	2142.6	2147.8	2155.1	2162.4	2155.1
12.5°	2098.0	2115.1	2132.3	2133.5	2129.5	2130.2	2135.5	2141.2	2148.5	2155.8	2148.5
15°	2070.1	2088.3	2106.6	2110.4	2109.5	2112.3	2118.6	2124.6	2129.1	2133.7	2129.1
17.5°	2037.7	2055.9	2074.1	2077.7	2076.5	2076.6	2078.3	2080.1	2082.3	2084.4	2082.3
20°	2014.7	2032.9	2051.2	2053.7	2050.9	2046.4	2040.0	2035.2	2035.2	2035.2	2035.2
22.5°	1981.9	2001.6	2021.3	2021.4	2015.0	2003.2	1985.8	1971.4	1965.5	1959.7	1965.5
25°	1932.6	1951.8	1970.9	1962.0	1943.8	1916.9	1881.3	1851.2	1837.6	1823.9	1837.6
27.5°	1875.2	1890.7	1906.2	1883.0	1846.9	1803.6	1753.0	1710.4	1691.4	1672.5	1691.4
30°	1834.1	1846.0	1857.9	1821.1	1768.3	1714.0	1658.4	1612.1	1593.9	1575.6	1593.9
32.5°	1791.5	1796.0	1800.6	1752.2	1686.2	1624.3	1566.5	1518.2	1498.5	1478.8	1498.5
35°	1721.3	1713.1	1704.9	1640.6	1557.6	1487.0	1428.6	1380.5	1363.2	1345.9	1363.2
37.5°	1638.4	1614.0	1589.5	1517.1	1428.7	1353.9	1292.8	1242.2	1223.0	1203.9	1223.0
40°	1577.7	1543.0	1508.4	1430.7	1338.6	1262.0	1200.9	1150.3	1131.1	1112.0	1131.1
42.5°	1510.4	1467.0	1423.6	1343.7	1251.6	1175.0	1113.9	1063.1	1043.2	1023.3	1043.2
45°	1399.2	1348.1	1297.1	1213.9	1120.0	1043.4	984.1	934.9	915.7	896.6	915.7
47.5°	1274.1	1223.4	1172.7	1089.7	995.9	920.4	862.9	815.7	799.3	782.9	799.3
50°	1183.8	1134.5	1085.3	1006.0	916.6	843.2	785.8	737.7	717.6	697.5	717.6
52.5°	1091.9	1047.7	1003.6	927.2	840.0	767.0	708.1	657.1	629.7	602.4	629.7
55°	966.3	924.4	882.4	810.4	728.3	654.5	588.8	535.7	520.2	504.7	520.2
57.5°	837.1	800.8	764.5	699.7	625.5	558.6	499.0	451.0	438.3	425.5	438.3
60°	755.0	723.1	691.2	629.2	557.1	496.0	445.9	405.1	392.3	379.5	392.3
62.5°	676.2	647.9	619.7	560.2	490.4	435.5	395.6	363.0	352.4	341.8	352.4
65°	558.0	537.1	516.1	467.1	408.7	363.1	330.3	303.4	294.3	285.2	294.3
67.5°	443.1	431.5	419.8	383.1	338.1	301.1	272.3	249.2	243.2	237.2	243.2
70°	369.3	365.6	362.0	331.7	292.5	261.0	237.3	218.4	213.8	209.3	213.8
72.5°	305.3	306.7	308.2	283.0	248.9	222.5	203.9	189.2	186.1	183.0	186.1
75°	217.5	224.8	232.1	215.4	190.8	172.1	159.3	149.3	147.5	145.7	147.5
77.5°	148.1	159.1	170.0	159.2	141.2	127.4	117.9	110.4	109.0	107.5	109.0
80°	108.7	119.7	130.6	123.1	109.4	98.9	91.6	86.2	86.2	86.2	86.2
82.5°	75.9	84.7	93.4	88.1	78.1	71.2	67.6	64.8	64.8	64.8	64.8
85°	36.9	41.5	46.0	44.5	40.8	36.2	30.8	26.4	25.5	24.6	25.5
87.5°	10.3	13.0	15.9	14.3	11.0	9.0	8.3	7.8	8.0	8.0	8.0
90°	2.1	4.9	8.3	11.1	13.2	13.9	13.9	14.6	15.3	15.3	15.3
92.5°	7.7	12.1	12.2	12.2	14.9	16.1	17.2	17.4	18.1	18.1	18.1
95°	21.6	23.6	35.5	34.8	23.6	18.8	16.0	16.0	16.0	16.0	16.0
97.5°	41.2	44.2	46.2	61.9	65.4	63.2	51.5	43.3	38.7	36.6	38.7
100°	58.4	59.8	64.0	64.7	82.1	98.8	90.4	80.0	76.5	74.4	76.5
102.5°	75.7	76.5	82.9	85.8	89.9	99.3	128.3	125.1	122.7	122.3	122.7
105°	101.5	102.2	114.1	119.6	122.4	122.4	121.7	135.6	157.9	162.7	157.9
107.5°	129.2	132.4	146.3	161.2	164.4	165.3	161.6	159.5	158.7	159.3	158.7
110°	148.1	153.0	169.7	188.5	193.4	194.7	193.4	191.3	189.9	189.9	189.9

TEST NUMBER: P1428388

CATALOG NUMBER: SQ2W-PW1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	166.5	173.6	192.5	214.1	222.3	226.5	223.4	221.9	220.5	221.6	220.5
115°	194.7	205.2	230.2	252.5	269.2	271.2	270.6	270.6	269.9	269.9	269.9
117.5°	220.9	237.6	265.7	291.6	310.9	316.5	319.2	318.4	317.6	319.0	317.6
120°	239.3	258.7	290.7	319.9	338.7	347.1	349.8	348.4	349.8	348.4	349.8
122.5°	258.7	282.7	314.1	344.4	366.5	376.0	379.3	379.6	379.9	379.1	379.9
125°	287.9	317.2	354.0	385.3	408.3	419.4	422.2	422.9	424.3	427.7	424.3
127.5°	317.4	350.5	391.0	421.2	444.7	458.2	462.5	464.0	467.0	468.5	467.0
130°	338.0	375.6	416.6	445.1	468.1	482.7	490.3	492.4	495.9	495.2	495.9
132.5°	359.7	398.9	440.5	470.2	491.4	507.2	513.7	519.7	520.9	521.9	520.9
135°	391.6	434.0	475.7	504.9	525.1	540.4	548.8	554.3	557.8	559.9	557.8
137.5°	425.1	469.9	509.9	536.0	556.3	569.5	578.9	584.8	588.4	590.1	588.4
140°	447.9	491.0	530.0	557.1	575.2	588.4	596.7	603.7	607.9	607.9	607.9
142.5°	469.6	512.2	550.0	577.1	593.0	605.1	614.0	619.3	624.0	624.0	624.0
145°	500.1	542.5	577.3	604.4	617.6	628.7	638.5	642.6	645.4	645.4	645.4
147.5°	531.9	569.5	601.2	627.2	638.3	651.4	659.1	662.4	665.9	664.3	665.9
150°	550.8	585.6	616.2	640.6	651.7	664.2	671.9	674.6	678.1	676.0	678.1
152.5°	569.2	602.3	630.1	652.8	662.3	674.8	683.5	686.3	688.7	687.2	688.7
155°	594.0	623.2	648.9	669.8	678.1	689.9	698.3	701.8	704.5	701.1	704.5
157.5°	616.1	641.3	663.7	682.8	691.8	701.9	709.7	714.0	716.8	715.3	716.8
160°	629.4	652.4	672.6	690.6	699.0	708.0	716.4	721.2	724.0	721.9	724.0
162.5°	640.6	661.3	680.3	696.8	704.0	711.9	721.9	726.2	729.0	726.4	729.0
165°	656.6	673.3	689.9	703.9	710.1	716.4	726.8	731.7	733.8	731.0	733.8
167.5°	668.7	681.5	695.0	706.9	711.5	717.6	728.1	732.1	734.7	731.3	734.7
170°	675.3	686.5	698.3	708.0	711.5	717.1	727.5	731.0	733.1	729.6	733.1
172.5°	680.9	689.2	698.8	707.5	709.3	713.7	723.6	727.1	728.6	725.7	728.6
175°	686.5	691.3	698.3	703.9	703.2	705.9	714.3	717.1	719.9	715.7	719.9
177.5°	689.1	691.3	693.6	696.9	694.7	694.7	700.8	702.5	703.0	700.8	703.0
180°	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6



TEST NUMBER: P1428388

CATALOG NUMBER: SQ2W-PW1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2
2.5°	2151.5	2150.4	2149.6	2153.3	2161.3	2164.2	2151.8	2139.4	2151.8	2164.2	2161.3
5°	2152.1	2149.4	2148.5	2152.1	2160.3	2162.6	2147.1	2131.6	2147.1	2162.6	2160.3
7.5°	2151.3	2146.9	2143.8	2145.4	2151.6	2152.3	2136.6	2121.0	2136.6	2152.3	2151.6
10°	2147.8	2142.6	2138.0	2138.5	2143.9	2143.9	2127.5	2111.1	2127.5	2143.9	2143.9
12.5°	2141.2	2135.5	2130.2	2129.5	2133.5	2132.3	2115.1	2098.0	2115.1	2132.3	2133.5
15°	2124.6	2118.6	2112.3	2109.5	2110.4	2106.6	2088.3	2070.1	2088.3	2106.6	2110.4
17.5°	2080.1	2078.3	2076.6	2076.5	2077.7	2074.1	2055.9	2037.7	2055.9	2074.1	2077.7
20°	2035.2	2040.0	2046.4	2050.9	2053.7	2051.2	2032.9	2014.7	2032.9	2051.2	2053.7
22.5°	1971.4	1985.8	2003.2	2015.0	2021.4	2021.3	2001.6	1981.9	2001.6	2021.3	2021.4
25°	1851.2	1881.3	1916.9	1943.8	1962.0	1970.9	1951.8	1932.6	1951.8	1970.9	1962.0
27.5°	1710.4	1753.0	1803.6	1846.9	1883.0	1906.2	1890.7	1875.2	1890.7	1906.2	1883.0
30°	1612.1	1658.4	1714.0	1768.3	1821.1	1857.9	1846.0	1834.1	1846.0	1857.9	1821.1
32.5°	1518.2	1566.5	1624.3	1686.2	1752.2	1800.6	1796.0	1791.5	1796.0	1800.6	1752.2
35°	1380.5	1428.6	1487.0	1557.6	1640.6	1704.9	1713.1	1721.3	1713.1	1704.9	1640.6
37.5°	1242.2	1292.8	1353.9	1428.7	1517.1	1589.5	1614.0	1638.4	1614.0	1589.5	1517.1
40°	1150.3	1200.9	1262.0	1338.6	1430.7	1508.4	1543.0	1577.7	1543.0	1508.4	1430.7
42.5°	1063.1	1113.9	1175.0	1251.6	1343.7	1423.6	1467.0	1510.4	1467.0	1423.6	1343.7
45°	934.9	984.1	1043.4	1120.0	1213.9	1297.1	1348.1	1399.2	1348.1	1297.1	1213.9
47.5°	815.7	862.9	920.4	995.9	1089.7	1172.7	1223.4	1274.1	1223.4	1172.7	1089.7
50°	737.7	785.8	843.2	916.6	1006.0	1085.3	1134.5	1183.8	1134.5	1085.3	1006.0
52.5°	657.1	708.1	767.0	840.0	927.2	1003.6	1047.7	1091.9	1047.7	1003.6	927.2
55°	535.7	588.8	654.5	728.3	810.4	882.4	924.4	966.3	924.4	882.4	810.4
57.5°	451.0	499.0	558.6	625.5	699.7	764.5	800.8	837.1	800.8	764.5	699.7
60°	405.1	445.9	496.0	557.1	629.2	691.2	723.1	755.0	723.1	691.2	629.2
62.5°	363.0	395.6	435.5	490.4	560.2	619.7	647.9	676.2	647.9	619.7	560.2
65°	303.4	330.3	363.1	408.7	467.1	516.1	537.1	558.0	537.1	516.1	467.1
67.5°	249.2	272.3	301.1	338.1	383.1	419.8	431.5	443.1	431.5	419.8	383.1
70°	218.4	237.3	261.0	292.5	331.7	362.0	365.6	369.3	365.6	362.0	331.7
72.5°	189.2	203.9	222.5	248.9	283.0	308.2	306.7	305.3	306.7	308.2	283.0
75°	149.3	159.3	172.1	190.8	215.4	232.1	224.8	217.5	224.8	232.1	215.4
77.5°	110.4	117.9	127.4	141.2	159.2	170.0	159.1	148.1	159.1	170.0	159.2
80°	86.2	91.6	98.9	109.4	123.1	130.6	119.7	108.7	119.7	130.6	123.1
82.5°	64.8	67.6	71.2	78.1	88.1	93.4	84.7	75.9	84.7	93.4	88.1
85°	26.4	30.8	36.2	40.8	44.5	46.0	41.5	36.9	41.5	46.0	44.5
87.5°	7.8	8.3	9.0	11.0	14.3	15.9	13.0	10.3	13.0	15.8	14.5
90°	14.6	13.9	13.9	13.2	11.1	8.3	4.9	2.1	4.9	7.7	12.5
92.5°	17.4	17.2	16.1	14.9	12.2	12.2	12.1	7.7	13.2	18.8	27.0
95°	16.0	16.0	18.8	23.6	34.8	35.5	23.6	21.6	30.6	43.1	54.2
97.5°	43.3	51.5	63.2	65.4	61.9	46.2	44.2	41.2	56.1	68.4	86.4
100°	80.0	90.4	98.8	82.1	64.7	64.0	59.8	58.4	74.4	86.2	103.6
102.5°	125.1	128.3	99.3	89.9	85.8	82.9	76.5	75.7	91.7	107.9	122.5
105°	135.6	121.7	122.4	122.4	119.6	114.1	102.2	101.5	119.6	138.4	156.5
107.5°	159.5	161.6	165.3	164.4	161.2	146.3	132.4	129.2	145.5	168.0	187.9
110°	191.3	193.4	194.7	193.4	188.5	169.7	153.0	148.1	162.7	186.4	208.0



TEST NUMBER: P1428388

CATALOG NUMBER: SQ2W-PW1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	221.9	223.4	226.5	222.3	214.1	192.5	173.6	166.5	181.1	205.3	227.4
115°	270.6	270.6	271.2	269.2	252.5	230.2	205.2	194.7	207.3	229.5	253.9
117.5°	318.4	319.2	316.5	310.9	291.6	265.7	237.6	220.9	230.8	254.3	279.3
120°	348.4	349.8	347.1	338.7	319.9	290.7	258.7	239.3	246.9	269.9	294.9
122.5°	379.6	379.3	376.0	366.5	344.4	314.1	282.7	258.7	261.9	283.2	307.7
125°	422.9	422.2	419.4	408.3	385.3	354.0	317.2	287.9	283.8	301.9	326.9
127.5°	464.0	462.5	458.2	444.7	421.2	391.0	350.5	317.4	308.1	319.5	342.5
130°	492.4	490.3	482.7	468.1	445.1	416.6	375.6	338.0	324.8	331.8	351.9
132.5°	519.7	513.7	507.2	491.4	470.2	440.5	398.9	359.7	341.5	344.6	360.3
135°	554.3	548.8	540.4	525.1	504.9	475.7	434.0	391.6	366.5	363.8	372.8
137.5°	584.8	578.9	569.5	556.3	536.0	509.9	469.9	425.1	393.5	384.2	387.7
140°	603.7	596.7	588.4	575.2	557.1	530.0	491.0	447.9	412.4	399.2	397.1
142.5°	619.3	614.0	605.1	593.0	577.1	550.0	512.2	469.6	431.9	414.8	409.9
145°	642.6	638.5	628.7	617.6	604.4	577.3	542.5	500.1	462.5	440.3	429.8
147.5°	662.4	659.1	651.4	638.3	627.2	601.2	569.5	531.9	493.4	465.9	452.4
150°	674.6	671.9	664.2	651.7	640.6	616.2	585.6	550.8	514.0	484.8	467.4
152.5°	686.3	683.5	674.8	662.3	652.8	630.1	602.3	569.2	531.8	502.6	484.6
155°	701.8	698.3	689.9	678.1	669.8	648.9	623.2	594.0	562.0	531.4	511.2
157.5°	714.0	709.7	701.9	691.8	682.8	663.7	641.3	616.1	588.1	558.9	538.3
160°	721.2	716.4	708.0	699.0	690.6	672.6	652.4	629.4	603.7	577.3	555.0
162.5°	726.2	721.9	711.9	704.0	696.8	680.3	661.3	640.6	617.6	594.5	573.9
165°	731.7	726.8	716.4	710.1	703.9	689.9	673.3	656.6	637.1	618.3	601.6
167.5°	732.1	728.1	717.6	711.5	706.9	695.0	681.5	668.7	653.5	638.8	624.8
170°	731.0	727.5	717.1	711.5	708.0	698.3	686.5	675.3	663.5	651.0	639.9
172.5°	727.1	723.6	713.7	709.3	707.5	698.8	689.2	680.9	670.7	661.6	652.7
175°	717.1	714.3	705.9	703.2	703.9	698.3	691.3	686.5	680.2	674.6	669.8
177.5°	702.5	700.8	694.7	694.7	696.9	693.6	691.3	689.1	686.3	684.7	683.0
180°	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6



TEST NUMBER: P1428388

CATALOG NUMBER: SQ2W-PW1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2	2154.2
2.5°	2153.3	2149.6	2150.4	2151.5	2153.6	2155.8	2153.6	2151.5	2150.4	2149.6	2153.3
5°	2152.1	2148.5	2149.4	2152.1	2160.3	2168.6	2160.3	2152.1	2149.4	2148.5	2152.1
7.5°	2145.4	2143.8	2146.9	2151.3	2159.3	2167.3	2159.3	2151.3	2146.9	2143.8	2145.4
10°	2138.5	2138.0	2142.6	2147.8	2155.1	2162.4	2155.1	2147.8	2142.6	2138.0	2138.5
12.5°	2129.5	2130.2	2135.5	2141.2	2148.5	2155.8	2148.5	2141.2	2135.5	2130.2	2129.5
15°	2109.5	2112.3	2118.6	2124.6	2129.1	2133.7	2129.1	2124.6	2118.6	2112.3	2109.5
17.5°	2076.5	2076.6	2078.3	2080.1	2082.3	2084.4	2082.3	2080.1	2078.3	2076.6	2076.5
20°	2050.9	2046.4	2040.0	2035.2	2035.2	2035.2	2035.2	2035.2	2040.0	2046.4	2050.9
22.5°	2015.0	2003.2	1985.8	1971.4	1965.5	1959.7	1965.5	1971.4	1985.8	2003.2	2015.0
25°	1943.8	1916.9	1881.3	1851.2	1837.6	1823.9	1837.6	1851.2	1881.3	1916.9	1943.8
27.5°	1846.9	1803.6	1753.0	1710.4	1691.4	1672.5	1691.4	1710.4	1753.0	1803.6	1846.9
30°	1768.3	1714.0	1658.4	1612.1	1593.9	1575.6	1593.9	1612.1	1658.4	1714.0	1768.3
32.5°	1686.2	1624.3	1566.5	1518.2	1498.5	1478.8	1498.5	1518.2	1566.5	1624.3	1686.2
35°	1557.6	1487.0	1428.6	1380.5	1363.2	1345.9	1363.2	1380.5	1428.6	1487.0	1557.6
37.5°	1428.7	1353.9	1292.8	1242.2	1223.0	1203.9	1223.0	1242.2	1292.8	1353.9	1428.7
40°	1338.6	1262.0	1200.9	1150.3	1131.1	1112.0	1131.1	1150.3	1200.9	1262.0	1338.6
42.5°	1251.6	1175.0	1113.9	1063.1	1043.2	1023.3	1043.2	1063.1	1113.9	1175.0	1251.6
45°	1120.0	1043.4	984.1	934.9	915.7	896.6	915.7	934.9	984.1	1043.4	1120.0
47.5°	995.9	920.4	862.9	815.7	799.3	782.9	799.3	815.7	862.9	920.4	995.9
50°	916.6	843.2	785.8	737.7	717.6	697.5	717.6	737.7	785.8	843.2	916.6
52.5°	840.0	767.0	708.1	657.1	629.7	602.4	629.7	657.1	708.1	767.0	840.0
55°	728.3	654.5	588.8	535.7	520.2	504.7	520.2	535.7	588.8	654.5	728.3
57.5°	625.5	558.6	499.0	451.0	438.3	425.5	438.3	451.0	499.0	558.6	625.5
60°	557.1	496.0	445.9	405.1	392.3	379.5	392.3	405.1	445.9	496.0	557.1
62.5°	490.4	435.5	395.6	363.0	352.4	341.8	352.4	363.0	395.6	435.5	490.4
65°	408.7	363.1	330.3	303.4	294.3	285.2	294.3	303.4	330.3	363.1	408.7
67.5°	338.1	301.1	272.3	249.2	243.2	237.2	243.2	249.2	272.3	301.1	338.1
70°	292.5	261.0	237.3	218.4	213.8	209.3	213.8	218.4	237.3	261.0	292.5
72.5°	248.9	222.5	203.9	189.2	186.1	183.0	186.1	189.2	203.9	222.5	248.9
75°	190.8	172.1	159.3	149.3	147.5	145.7	147.5	149.3	159.3	172.1	190.8
77.5°	141.2	127.4	117.9	110.4	109.0	107.5	109.0	110.4	117.9	127.4	141.2
80°	109.4	98.9	91.6	86.2	86.2	86.2	86.2	86.2	91.6	98.9	109.4
82.5°	78.1	71.2	67.6	64.8	64.8	64.8	64.8	64.8	67.6	71.2	78.1
85°	40.8	36.2	30.8	26.4	25.5	24.6	25.5	26.4	30.8	36.2	40.8
87.5°	11.6	10.4	10.6	10.6	11.2	10.9	11.2	10.6	10.6	10.4	11.6
90°	16.0	20.9	25.7	28.5	31.3	29.9	31.3	28.5	25.7	20.9	16.0
92.5°	32.1	40.3	46.3	51.3	53.6	53.3	53.6	51.3	46.3	40.3	32.1
95°	64.7	74.4	84.2	91.1	95.3	93.9	95.3	91.1	84.2	74.4	64.7
97.5°	99.7	112.8	123.7	130.2	134.4	137.2	134.4	130.2	123.7	112.8	99.7
100°	123.1	135.6	148.1	155.8	162.7	165.5	162.7	155.8	148.1	135.6	123.1
102.5°	142.0	158.4	172.1	180.3	186.1	188.9	186.1	180.3	172.1	158.4	142.0
105°	173.2	190.6	205.2	215.6	221.9	224.0	221.9	215.6	205.2	190.6	173.2
107.5°	204.3	222.3	235.8	247.3	255.0	259.4	255.0	247.3	235.8	222.3	204.3
110°	228.8	243.4	258.0	268.5	276.1	278.9	276.1	268.5	258.0	243.4	228.8



TEST NUMBER: P1428388

CATALOG NUMBER: SQ2W-PW1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	249.4	265.7	280.3	290.7	299.5	303.4	299.5	290.7	280.3	265.7	249.4
115°	278.2	299.8	313.0	322.7	329.0	332.5	329.0	322.7	313.0	299.8	278.2
117.5°	302.1	324.7	339.1	346.6	349.6	352.1	349.6	346.6	339.1	324.7	302.1
120°	317.2	338.0	354.7	364.4	367.9	369.3	367.9	364.4	354.7	338.0	317.2
122.5°	331.1	350.8	366.9	378.9	384.6	386.0	384.6	378.9	366.9	350.8	331.1
125°	350.5	369.3	386.0	397.8	404.1	407.6	404.1	397.8	386.0	369.3	350.5
127.5°	367.5	387.8	403.1	413.8	419.9	422.7	419.9	413.8	403.1	387.8	367.5
130°	377.0	397.8	413.1	425.0	430.5	433.3	430.5	425.0	413.1	397.8	377.0
132.5°	384.2	406.2	422.0	432.7	438.9	441.6	438.9	432.7	422.0	406.2	384.2
135°	393.0	415.9	432.6	443.0	448.6	451.4	448.6	443.0	432.6	415.9	393.0
137.5°	400.6	421.5	438.9	449.9	454.9	456.7	454.9	449.9	438.9	421.5	400.6
140°	406.2	424.3	441.6	452.1	457.6	458.3	457.6	452.1	441.6	424.3	406.2
142.5°	413.4	427.6	442.8	453.2	458.8	460.0	458.8	453.2	442.8	427.6	413.4
145°	426.3	434.7	445.1	454.9	459.7	461.1	459.7	454.9	445.1	434.7	426.3
147.5°	442.6	445.3	450.7	457.1	461.8	462.8	461.8	457.1	445.3	442.6	442.6
150°	454.9	454.2	456.3	460.4	464.6	463.9	464.6	460.4	456.3	454.2	454.9
152.5°	468.8	464.7	464.6	466.5	468.5	468.4	468.5	466.5	464.6	464.7	468.8
155°	492.4	484.8	480.6	479.2	479.2	478.5	479.2	479.2	480.6	484.8	492.4
157.5°	518.4	507.7	501.5	498.1	497.1	495.6	497.1	498.1	501.5	507.7	518.4
160°	536.2	524.4	518.2	512.6	510.5	508.4	510.5	512.6	518.2	524.4	536.2
162.5°	552.9	541.7	534.8	529.8	527.8	524.6	527.8	529.8	534.8	541.7	552.9
165°	580.1	568.2	560.6	556.4	553.6	550.8	553.6	556.4	560.6	568.2	580.1
167.5°	607.2	594.2	589.2	584.5	581.9	576.9	581.9	584.5	589.2	594.2	607.2
170°	623.9	612.0	609.3	605.1	600.2	594.7	600.2	605.1	609.3	612.0	623.9
172.5°	638.3	630.4	627.6	623.5	621.9	617.5	621.9	623.5	627.6	630.4	638.3
175°	659.3	653.1	653.1	652.4	650.3	646.1	650.3	652.4	653.1	653.1	659.3
177.5°	676.9	673.5	675.8	675.8	675.2	671.3	675.2	675.8	675.8	673.5	676.9
180°	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6



TEST NUMBER: P1428388

CATALOG NUMBER: SQ2W-PW1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	2154.2	2154.2	2154.2	2154.2
2.5°	2161.3	2164.2	2151.8	2139.4
5°	2160.3	2162.6	2147.1	2131.6
7.5°	2151.6	2152.3	2136.6	2121.0
10°	2143.9	2143.9	2127.5	2111.1
12.5°	2133.5	2132.3	2115.1	2098.0
15°	2110.4	2106.6	2088.3	2070.1
17.5°	2077.7	2074.1	2055.9	2037.7
20°	2053.7	2051.2	2032.9	2014.7
22.5°	2021.4	2021.3	2001.6	1981.9
25°	1962.0	1970.9	1951.8	1932.6
27.5°	1883.0	1906.2	1890.7	1875.2
30°	1821.1	1857.9	1846.0	1834.1
32.5°	1752.2	1800.6	1796.0	1791.5
35°	1640.6	1704.9	1713.1	1721.3
37.5°	1517.1	1589.5	1614.0	1638.4
40°	1430.7	1508.4	1543.0	1577.7
42.5°	1343.7	1423.6	1467.0	1510.4
45°	1213.9	1297.1	1348.1	1399.2
47.5°	1089.7	1172.7	1223.4	1274.1
50°	1006.0	1085.3	1134.5	1183.8
52.5°	927.2	1003.6	1047.7	1091.9
55°	810.4	882.4	924.4	966.3
57.5°	699.7	764.5	800.8	837.1
60°	629.2	691.2	723.1	755.0
62.5°	560.2	619.7	647.9	676.2
65°	467.1	516.1	537.1	558.0
67.5°	383.1	419.8	431.5	443.1
70°	331.7	362.0	365.6	369.3
72.5°	283.0	308.2	306.7	305.3
75°	215.4	232.1	224.8	217.5
77.5°	159.2	170.0	159.1	148.1
80°	123.1	130.6	119.7	108.7
82.5°	88.1	93.4	84.7	75.9
85°	44.5	46.0	41.5	36.9
87.5°	14.5	15.8	13.0	10.3
90°	12.5	7.7	4.9	2.1
92.5°	27.0	18.8	13.2	7.7
95°	54.2	43.1	30.6	21.6
97.5°	86.4	68.4	56.1	41.2
100°	103.6	86.2	74.4	58.4
102.5°	122.5	107.9	91.7	75.7
105°	156.5	138.4	119.6	101.5
107.5°	187.9	168.0	145.5	129.2
110°	208.0	186.4	162.7	148.1



TEST NUMBER: P1428388

CATALOG NUMBER: SQ2W-PW1-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	227.4	205.3	181.1	166.5
115°	253.9	229.5	207.3	194.7
117.5°	279.3	254.3	230.8	220.9
120°	294.9	269.9	246.9	239.3
122.5°	307.7	283.2	261.9	258.7
125°	326.9	301.9	283.8	287.9
127.5°	342.5	319.5	308.1	317.4
130°	351.9	331.8	324.8	338.0
132.5°	360.3	344.6	341.5	359.7
135°	372.8	363.8	366.5	391.6
137.5°	387.7	384.2	393.5	425.1
140°	397.1	399.2	412.4	447.9
142.5°	409.9	414.8	431.9	469.6
145°	429.8	440.3	462.5	500.1
147.5°	452.4	465.9	493.4	531.9
150°	467.4	484.8	514.0	550.8
152.5°	484.6	502.6	531.8	569.2
155°	511.2	531.4	562.0	594.0
157.5°	538.3	558.9	588.1	616.1
160°	555.0	577.3	603.7	629.4
162.5°	573.9	594.5	617.6	640.6
165°	601.6	618.3	637.1	656.6
167.5°	624.8	638.8	653.5	668.7
170°	639.9	651.0	663.5	675.3
172.5°	652.7	661.6	670.7	680.9
175°	669.8	674.6	680.2	686.5
177.5°	683.0	684.7	686.3	689.1
180°	688.6	688.6	688.6	688.6



TEST NUMBER: P1428388
 CATALOG NUMBER: SQ2W-PW1-K-050U-100D-L940-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.98	22.00	21.74	22.78	23.73	17.22	18.24	17.99	19.03	19.98
	3H	22.29	23.20	23.07	23.99	24.98	18.51	19.42	19.29	20.21	21.19
	4H	22.71	23.56	23.51	24.37	25.36	19.02	19.88	19.82	20.68	21.67
	6H	22.89	23.68	23.71	24.49	25.50	19.34	20.13	20.15	20.94	21.94
	8H	22.94	23.69	23.76	24.52	25.53	19.45	20.21	20.28	21.03	22.04
	12H	22.95	23.66	23.77	24.48	25.52	19.49	20.20	20.32	21.03	22.06
4H	2H	21.13	21.98	21.93	22.79	23.78	18.05	18.91	18.86	19.71	20.71
	3H	22.68	23.39	23.50	24.23	25.24	19.51	20.22	20.33	21.06	22.07
	4H	23.23	23.88	24.06	24.71	25.75	20.10	20.74	20.93	21.58	22.62
	6H	23.55	24.11	24.40	24.97	26.01	20.49	21.05	21.34	21.91	22.95
	8H	23.65	24.17	24.50	25.02	26.07	20.64	21.16	21.49	22.02	23.07
	12H	23.68	24.14	24.54	25.02	26.08	20.69	21.16	21.56	22.04	23.09
8H	4H	23.28	23.80	24.13	24.66	25.71	20.45	20.97	21.30	21.83	22.88
	6H	23.71	24.14	24.59	25.04	26.09	20.95	21.38	21.83	22.28	23.33
	8H	23.88	24.26	24.77	25.15	26.22	21.17	21.55	22.06	22.44	23.51
	12H	23.97	24.30	24.85	25.18	26.31	21.26	21.60	22.15	22.48	23.60
12H	4H	23.25	23.72	24.12	24.59	25.65	20.48	20.94	21.35	21.82	22.88
	6H	23.70	24.08	24.59	24.98	26.05	21.03	21.41	21.91	22.30	23.37
	8H	23.90	24.24	24.79	25.12	26.24	21.28	21.61	22.17	22.50	23.62