

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428493

Luminaire Tested: SQ2W-WBM-0U-050D-L940-UNV-STD-W-WM-4

Issue Date: 3/10/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1428493  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G3-2104-222-6)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/10/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2W-WBM-0U-050D-L940-UNV-STD-W-WM-4  
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE  
DOWNLIGHT - WHITE DISCREET BAFFLE, MEDIUM 80-DEGREE OPTIC  
UPLIGHT - ASYMMETRIC ROLL LENS  
DOWNLIGHT 500 LUMENS PER FOOT  
UPLIGHT N/A - DIRECT ONLY  
Light Source: 4000K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2319.0 lumens  
Efficiency: N/A  
Efficacy: 128.1 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.18 / 1.17  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Direct

Input Watts (W): 18.1  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1428493

CATALOG NUMBER: SQ2W-WBM-0U-050D-L940-UNV-STD-W-WM-4

### Luminous Intensity Polar Plot

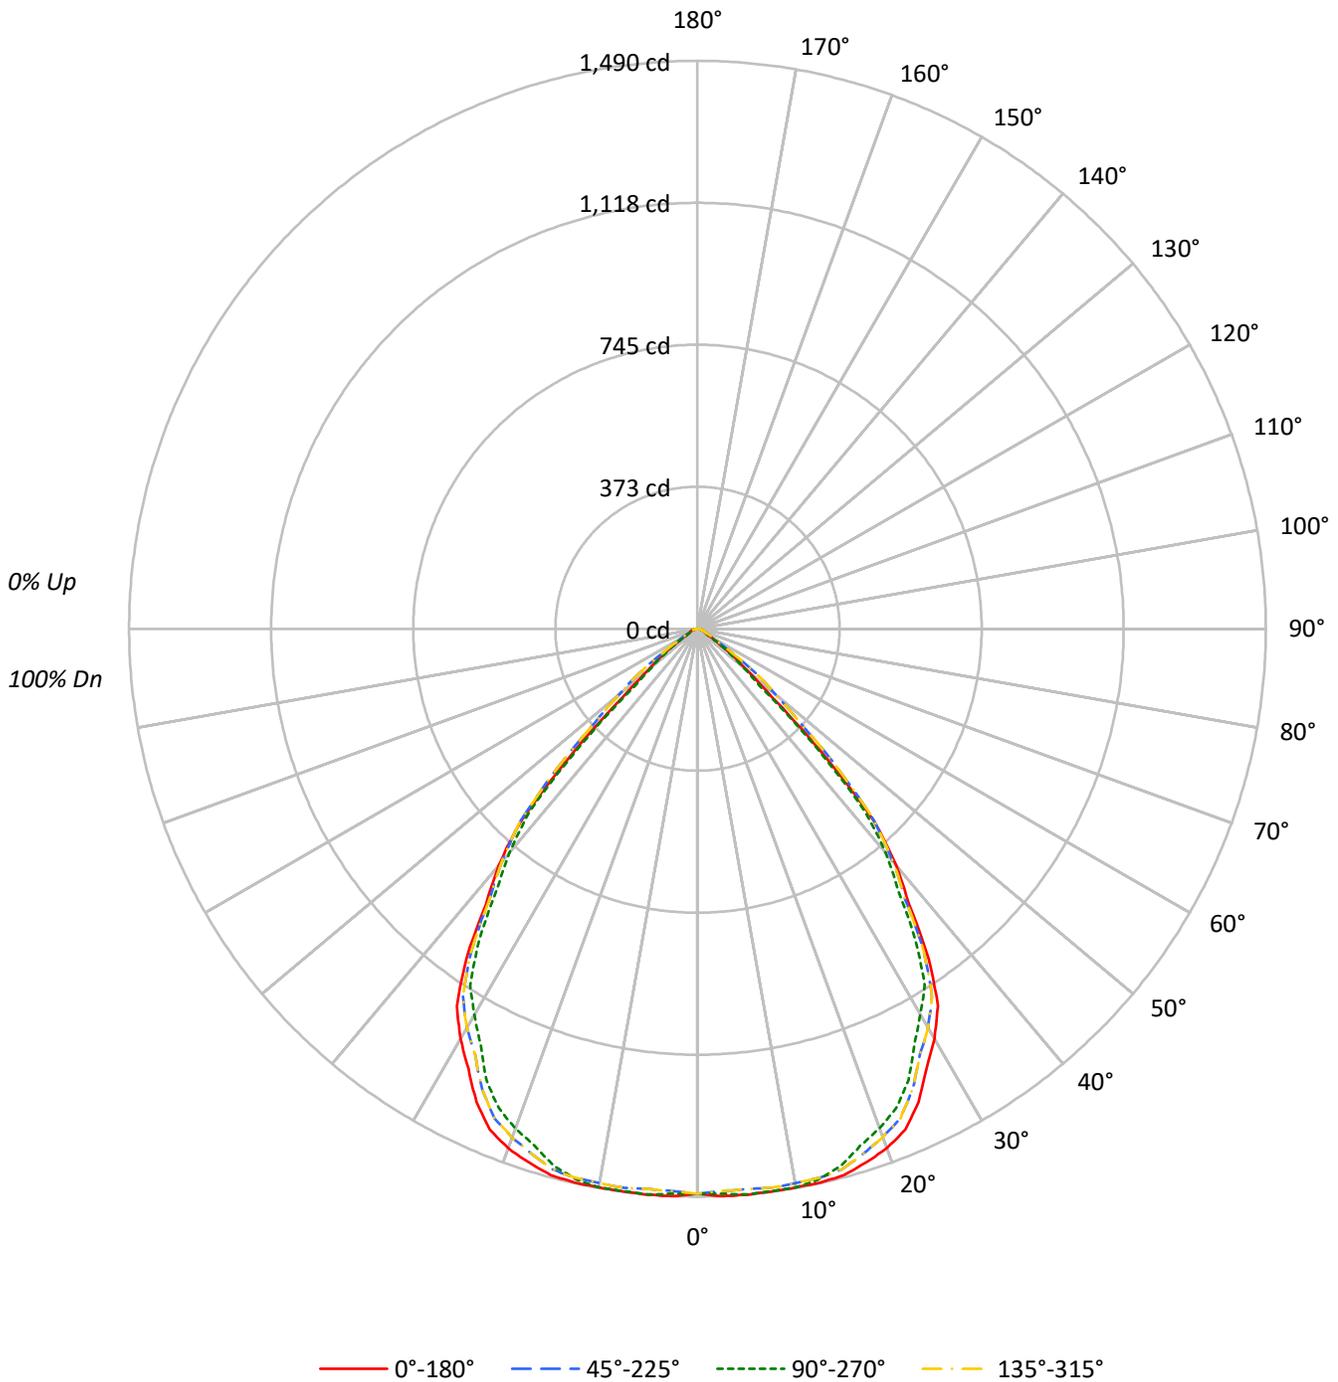



TEST NUMBER: P1428493

CATALOG NUMBER: SQ2W-WBM-0U-050D-L940-UNV-STD-W-WM-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83
3	99	92	86	81	97	90	85	80	87	83	79	85	81	78	83	79	77	75
4	93	84	78	73	91	83	77	72	81	75	71	79	74	70	77	73	70	68
5	87	77	70	65	85	76	70	65	74	69	65	73	68	64	71	67	63	62
6	82	71	64	59	80	70	64	59	69	63	59	67	62	58	66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51
8	72	61	54	49	71	61	54	49	59	53	49	58	53	49	57	52	49	47
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	23936	23936	23936	23936
5°	24154	24142	24154	24142
10°	24398	24387	24398	24387
15°	24805	24366	24805	24366
20°	24924	23970	24924	23970
25°	24410	23296	24410	23296
30°	23161	21783	23161	21783
35°	20830	19653	20830	19653
40°	17076	16178	17076	16178
45°	10677	10028	10677	10028
50°	4177	3820	4177	3820
55°	2060	2041	2060	2041
60°	962	872	962	872
65°	867	814	867	814
70°	840	807	840	807
75°	842	755	842	755
80°	790	725	790	725
85°	797	667	797	667

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 30°  
 Vertical Angle: 45°  
 Luminance: 12154 cd/sqm



TEST NUMBER: P1428493

CATALOG NUMBER: SQ2W-WBM-0U-050D-L940-UNV-STD-W-WM-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	141.7	6.1
10°-20°	414.5	17.9
20°-30°	612.8	26.4
30°-40°	634.1	27.3
40°-50°	381.4	16.4
50°-60°	91.2	3.9
60°-70°	24.9	1.1
70°-80°	13.9	0.6
80°-90°	4.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1169.1	50.4
0°-40°	1803.1	77.8
0°-60°	2275.7	98.1
0°-90°	2319.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2319.0	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1482	1482	1482	1482	1482	
5°	1490	1490	1490	1490	1490	142
15°	1484	1458	1484	1458	1484	418
25°	1370	1308	1370	1308	1370	626
35°	1057	997	1057	997	1057	649
45°	468	439	468	439	468	362
55°	73	72	73	72	73	73
65°	23	21	23	21	23	23
75°	14	12	14	12	14	14
85°	4	4	4	4	4	4
90°	0	0	0	0	0	



TEST NUMBER: P1428493

CATALOG NUMBER: SQ2W-WBM-OU-050D-L940-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5
2.5°	1489.9	1488.2	1486.4	1482.0	1476.7	1476.8	1482.3	1486.2	1484.9	1483.7	1484.9
5°	1490.3	1488.1	1485.9	1480.9	1474.9	1476.3	1485.1	1491.5	1490.6	1489.6	1490.6
7.5°	1488.8	1487.8	1486.9	1483.2	1478.6	1479.6	1486.3	1491.0	1489.5	1488.1	1489.5
10°	1488.2	1488.5	1488.8	1484.0	1477.3	1477.5	1484.4	1489.4	1488.5	1487.5	1488.5
12.5°	1487.6	1490.2	1492.8	1486.2	1476.6	1474.4	1479.9	1483.4	1481.2	1479.0	1481.2
15°	1484.0	1489.0	1494.1	1485.1	1471.6	1464.8	1464.8	1464.0	1460.8	1457.7	1460.8
17.5°	1468.2	1474.2	1480.2	1468.1	1449.9	1438.5	1433.6	1429.0	1425.1	1421.3	1425.1
20°	1450.6	1456.6	1462.6	1448.2	1427.0	1412.5	1404.6	1398.3	1396.7	1395.1	1396.7
22.5°	1422.7	1429.2	1435.7	1420.3	1397.6	1382.0	1373.3	1366.2	1363.6	1361.0	1363.6
25°	1370.2	1375.3	1380.3	1364.3	1341.3	1326.6	1320.3	1314.6	1311.2	1307.7	1311.2
27.5°	1300.3	1303.1	1305.9	1290.4	1268.8	1254.3	1247.1	1240.5	1235.7	1230.9	1235.7
30°	1242.3	1243.6	1244.8	1232.4	1215.3	1202.0	1192.6	1183.6	1176.0	1168.4	1176.0
32.5°	1173.5	1174.8	1176.0	1165.1	1150.0	1138.0	1129.1	1120.8	1114.8	1108.7	1114.8
35°	1056.8	1056.2	1055.6	1048.5	1039.4	1029.6	1019.2	1009.8	1003.4	997.1	1003.4
37.5°	910.8	911.7	912.6	907.4	900.1	892.4	884.2	876.4	870.0	863.6	870.0
40°	810.2	810.8	811.5	807.1	801.1	792.1	780.1	770.7	769.1	767.6	769.1
42.5°	687.4	696.9	706.3	702.5	694.2	685.5	676.3	667.5	660.1	652.7	660.1
45°	467.6	496.4	525.1	532.3	532.3	526.8	515.7	499.9	469.5	439.2	469.5
47.5°	264.1	296.8	329.5	351.0	368.8	361.2	328.4	294.5	257.7	220.9	257.7
50°	166.3	188.4	210.5	238.1	267.5	259.4	213.9	176.7	164.4	152.1	164.4
52.5°	118.0	129.2	140.5	166.4	197.3	193.6	155.2	124.7	118.2	111.7	118.2
55°	73.2	77.3	81.4	94.1	109.5	108.6	91.2	77.5	75.0	72.5	75.0
57.5°	43.5	47.7	52.0	57.6	63.6	63.6	57.6	52.0	48.0	44.1	48.0
60°	29.8	33.3	36.8	41.5	46.5	45.9	39.6	34.0	30.5	27.0	30.5
62.5°	25.9	27.3	28.8	32.4	36.7	36.3	31.2	27.1	25.9	24.7	25.9
65°	22.7	23.1	23.4	23.7	24.0	23.8	23.2	22.6	22.0	21.3	22.0
67.5°	20.0	20.4	20.7	20.6	20.3	20.2	20.1	19.9	19.3	18.8	19.3
70°	17.8	18.1	18.4	18.5	18.5	18.3	18.0	17.7	17.4	17.1	17.4
72.5°	16.1	16.4	16.7	16.6	16.3	16.2	16.1	15.9	15.4	14.8	15.4
75°	13.5	13.5	13.5	13.5	13.5	13.3	13.0	12.7	12.4	12.1	12.4
77.5°	10.2	10.6	10.9	10.7	10.4	10.2	10.2	10.2	9.8	9.5	9.8
80°	8.5	8.8	9.2	9.0	8.7	8.5	8.5	8.4	8.1	7.8	8.1
82.5°	6.8	6.9	6.9	6.9	6.9	6.8	6.8	6.7	6.4	6.1	6.4
85°	4.3	4.3	4.3	4.0	3.7	3.6	3.6	3.6	3.6	3.6	3.6
87.5°	1.1	1.4	1.6	1.5	1.3	1.1	1.1	1.1	1.1	1.1	1.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1428493

CATALOG NUMBER: SQ2W-WBM-OU-050D-L940-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5
2.5°	1486.2	1482.3	1476.8	1476.7	1482.0	1486.4	1488.2	1489.9	1488.2	1486.4	1482.0
5°	1491.5	1485.1	1476.3	1474.9	1480.9	1485.9	1488.1	1490.3	1488.1	1485.9	1480.9
7.5°	1491.0	1486.3	1479.6	1478.6	1483.2	1486.9	1487.8	1488.8	1487.8	1486.9	1483.2
10°	1489.4	1484.4	1477.5	1477.3	1484.0	1488.8	1488.5	1488.2	1488.5	1488.8	1484.0
12.5°	1483.4	1479.9	1474.4	1476.6	1486.2	1492.8	1490.2	1487.6	1490.2	1492.8	1486.2
15°	1464.0	1464.8	1464.8	1471.6	1485.1	1494.1	1489.0	1484.0	1489.0	1494.1	1485.1
17.5°	1429.0	1433.6	1438.5	1449.9	1468.1	1480.2	1474.2	1468.2	1474.2	1480.2	1468.1
20°	1398.3	1404.6	1412.5	1427.0	1448.2	1462.6	1456.6	1450.6	1456.6	1462.6	1448.2
22.5°	1366.2	1373.3	1382.0	1397.6	1420.3	1435.7	1429.2	1422.7	1429.2	1435.7	1420.3
25°	1314.6	1320.3	1326.6	1341.3	1364.3	1380.3	1375.3	1370.2	1375.3	1380.3	1364.3
27.5°	1240.5	1247.1	1254.3	1268.8	1290.4	1305.9	1303.1	1300.3	1303.1	1305.9	1290.4
30°	1183.6	1192.6	1202.0	1215.3	1232.4	1244.8	1243.6	1242.3	1243.6	1244.8	1232.4
32.5°	1120.8	1129.1	1138.0	1150.0	1165.1	1176.0	1174.8	1173.5	1174.8	1176.0	1165.1
35°	1009.8	1019.2	1029.6	1039.4	1048.5	1055.6	1056.2	1056.8	1056.2	1055.6	1048.5
37.5°	876.4	884.2	892.4	900.1	907.4	912.6	911.7	910.8	911.7	912.6	907.4
40°	770.7	780.1	792.1	801.1	807.1	811.5	810.8	810.2	810.8	811.5	807.1
42.5°	667.5	676.3	685.5	694.2	702.5	706.3	696.9	687.4	696.9	706.3	702.5
45°	499.9	515.7	526.8	532.3	532.3	525.1	496.4	467.6	496.4	525.1	532.3
47.5°	294.5	328.4	361.2	368.8	351.0	329.5	296.8	264.1	296.8	329.5	351.0
50°	176.7	213.9	259.4	267.5	238.1	210.5	188.4	166.3	188.4	210.5	238.1
52.5°	124.7	155.2	193.6	197.3	166.4	140.5	129.2	118.0	129.2	140.5	166.4
55°	77.5	91.2	108.6	109.5	94.1	81.4	77.3	73.2	77.3	81.4	94.1
57.5°	52.0	57.6	63.6	63.6	57.6	52.0	47.7	43.5	47.7	52.0	57.6
60°	34.0	39.6	45.9	46.5	41.5	36.8	33.3	29.8	33.3	36.8	41.5
62.5°	27.1	31.2	36.3	36.7	32.4	28.8	27.3	25.9	27.3	28.8	32.4
65°	22.6	23.2	23.8	24.0	23.7	23.4	23.1	22.7	23.1	23.4	23.7
67.5°	19.9	20.1	20.2	20.3	20.6	20.7	20.4	20.0	20.4	20.7	20.6
70°	17.7	18.0	18.3	18.5	18.5	18.4	18.1	17.8	18.1	18.4	18.5
72.5°	15.9	16.1	16.2	16.3	16.6	16.7	16.4	16.1	16.4	16.7	16.6
75°	12.7	13.0	13.3	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5
77.5°	10.2	10.2	10.2	10.4	10.7	10.9	10.6	10.2	10.6	10.9	10.7
80°	8.4	8.5	8.5	8.7	9.0	9.2	8.8	8.5	8.8	9.2	9.0
82.5°	6.7	6.8	6.8	6.9	6.9	6.9	6.9	6.8	6.9	6.9	6.9
85°	3.6	3.6	3.6	3.7	4.0	4.3	4.3	4.3	4.3	4.3	4.0
87.5°	1.1	1.1	1.1	1.3	1.5	1.6	1.4	1.1	1.4	1.6	1.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1428493

CATALOG NUMBER: SQ2W-WBM-OU-050D-L940-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5	1482.5
2.5°	1476.7	1476.8	1482.3	1486.2	1484.9	1483.7	1484.9	1486.2	1482.3	1476.8	1476.7
5°	1474.9	1476.3	1485.1	1491.5	1490.6	1489.6	1490.6	1491.5	1485.1	1476.3	1474.9
7.5°	1478.6	1479.6	1486.3	1491.0	1489.5	1488.1	1489.5	1491.0	1486.3	1479.6	1478.6
10°	1477.3	1477.5	1484.4	1489.4	1488.5	1487.5	1488.5	1489.4	1484.4	1477.5	1477.3
12.5°	1476.6	1474.4	1479.9	1483.4	1481.2	1479.0	1481.2	1483.4	1479.9	1474.4	1476.6
15°	1471.6	1464.8	1464.8	1464.0	1460.8	1457.7	1460.8	1464.0	1464.8	1464.8	1471.6
17.5°	1449.9	1438.5	1433.6	1429.0	1425.1	1421.3	1425.1	1429.0	1433.6	1438.5	1449.9
20°	1427.0	1412.5	1404.6	1398.3	1396.7	1395.1	1396.7	1398.3	1404.6	1412.5	1427.0
22.5°	1397.6	1382.0	1373.3	1366.2	1363.6	1361.0	1363.6	1366.2	1373.3	1382.0	1397.6
25°	1341.3	1326.6	1320.3	1314.6	1311.2	1307.7	1311.2	1314.6	1320.3	1326.6	1341.3
27.5°	1268.8	1254.3	1247.1	1240.5	1235.7	1230.9	1235.7	1240.5	1247.1	1254.3	1268.8
30°	1215.3	1202.0	1192.6	1183.6	1176.0	1168.4	1176.0	1183.6	1192.6	1202.0	1215.3
32.5°	1150.0	1138.0	1129.1	1120.8	1114.8	1108.7	1114.8	1120.8	1129.1	1138.0	1150.0
35°	1039.4	1029.6	1019.2	1009.8	1003.4	997.1	1003.4	1009.8	1019.2	1029.6	1039.4
37.5°	900.1	892.4	884.2	876.4	870.0	863.6	870.0	876.4	884.2	892.4	900.1
40°	801.1	792.1	780.1	770.7	769.1	767.6	769.1	770.7	780.1	792.1	801.1
42.5°	694.2	685.5	676.3	667.5	660.1	652.7	660.1	667.5	676.3	685.5	694.2
45°	532.3	526.8	515.7	499.9	469.5	439.2	469.5	499.9	515.7	526.8	532.3
47.5°	368.8	361.2	328.4	294.5	257.7	220.9	257.7	294.5	328.4	361.2	368.8
50°	267.5	259.4	213.9	176.7	164.4	152.1	164.4	176.7	213.9	259.4	267.5
52.5°	197.3	193.6	155.2	124.7	118.2	111.7	118.2	124.7	155.2	193.6	197.3
55°	109.5	108.6	91.2	77.5	75.0	72.5	75.0	77.5	91.2	108.6	109.5
57.5°	63.6	63.6	57.6	52.0	48.0	44.1	48.0	52.0	57.6	63.6	63.6
60°	46.5	45.9	39.6	34.0	30.5	27.0	30.5	34.0	39.6	45.9	46.5
62.5°	36.7	36.3	31.2	27.1	25.9	24.7	25.9	27.1	31.2	36.3	36.7
65°	24.0	23.8	23.2	22.6	22.0	21.3	22.0	22.6	23.2	23.8	24.0
67.5°	20.3	20.2	20.1	19.9	19.3	18.8	19.3	19.9	20.1	20.2	20.3
70°	18.5	18.3	18.0	17.7	17.4	17.1	17.4	17.7	18.0	18.3	18.5
72.5°	16.3	16.2	16.1	15.9	15.4	14.8	15.4	15.9	16.1	16.2	16.3
75°	13.5	13.3	13.0	12.7	12.4	12.1	12.4	12.7	13.0	13.3	13.5
77.5°	10.4	10.2	10.2	10.2	9.8	9.5	9.8	10.2	10.2	10.2	10.4
80°	8.7	8.5	8.5	8.4	8.1	7.8	8.1	8.4	8.5	8.5	8.7
82.5°	6.9	6.8	6.8	6.7	6.4	6.1	6.4	6.7	6.8	6.8	6.9
85°	3.7	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.7
87.5°	1.3	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1428493

CATALOG NUMBER: SQ2W-WBM-0U-050D-L940-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
0°	1482.5	1482.5	1482.5	1482.5
2.5°	1482.0	1486.4	1488.2	1489.9
5°	1480.9	1485.9	1488.1	1490.3
7.5°	1483.2	1486.9	1487.8	1488.8
10°	1484.0	1488.8	1488.5	1488.2
12.5°	1486.2	1492.8	1490.2	1487.6
15°	1485.1	1494.1	1489.0	1484.0
17.5°	1468.1	1480.2	1474.2	1468.2
20°	1448.2	1462.6	1456.6	1450.6
22.5°	1420.3	1435.7	1429.2	1422.7
25°	1364.3	1380.3	1375.3	1370.2
27.5°	1290.4	1305.9	1303.1	1300.3
30°	1232.4	1244.8	1243.6	1242.3
32.5°	1165.1	1176.0	1174.8	1173.5
35°	1048.5	1055.6	1056.2	1056.8
37.5°	907.4	912.6	911.7	910.8
40°	807.1	811.5	810.8	810.2
42.5°	702.5	706.3	696.9	687.4
45°	532.3	525.1	496.4	467.6
47.5°	351.0	329.5	296.8	264.1
50°	238.1	210.5	188.4	166.3
52.5°	166.4	140.5	129.2	118.0
55°	94.1	81.4	77.3	73.2
57.5°	57.6	52.0	47.7	43.5
60°	41.5	36.8	33.3	29.8
62.5°	32.4	28.8	27.3	25.9
65°	23.7	23.4	23.1	22.7
67.5°	20.6	20.7	20.4	20.0
70°	18.5	18.4	18.1	17.8
72.5°	16.6	16.7	16.4	16.1
75°	13.5	13.5	13.5	13.5
77.5°	10.7	10.9	10.6	10.2
80°	9.0	9.2	8.8	8.5
82.5°	6.9	6.9	6.9	6.8
85°	4.0	4.3	4.3	4.3
87.5°	1.5	1.6	1.4	1.1
90°	0.0	0.0	0.0	0.0



TEST NUMBER: P1428493  
 CATALOG NUMBER: SQ2W-WBM-0U-050D-L940-UNV-STD-W-WM-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.16	8.34	7.53	8.65	8.97	7.14	8.32	7.50	8.63	8.95
	3H	7.88	8.92	8.26	9.25	9.61	7.79	8.83	8.17	9.16	9.52
	4H	8.26	9.22	8.67	9.57	9.96	8.11	9.07	8.52	9.43	9.81
	6H	8.55	9.42	8.96	9.80	10.19	8.36	9.24	8.78	9.61	10.01
	8H	8.67	9.50	9.11	9.89	10.30	8.47	9.29	8.90	9.69	10.09
	12H	8.76	9.55	9.19	9.93	10.37	8.53	9.32	8.96	9.70	10.13
4H	2H	7.30	8.26	7.70	8.61	9.00	7.28	8.24	7.68	8.59	8.98
	3H	8.27	9.05	8.69	9.45	9.86	8.18	8.96	8.59	9.36	9.77
	4H	8.78	9.47	9.22	9.89	10.34	8.63	9.32	9.07	9.74	10.19
	6H	9.22	9.81	9.69	10.26	10.73	9.01	9.61	9.48	10.06	10.53
	8H	9.41	9.96	9.88	10.41	10.88	9.18	9.73	9.65	10.18	10.65
	12H	9.55	10.03	10.04	10.52	11.00	9.28	9.77	9.77	10.25	10.73
8H	4H	8.91	9.46	9.38	9.91	10.38	8.77	9.32	9.24	9.77	10.24
	6H	9.49	9.93	9.99	10.43	10.92	9.29	9.73	9.79	10.23	10.72
	8H	9.76	10.17	10.29	10.69	11.18	9.54	9.94	10.07	10.46	10.96
	12H	9.99	10.35	10.51	10.85	11.42	9.72	10.08	10.24	10.57	11.15
12H	4H	8.90	9.39	9.39	9.87	10.35	8.77	9.25	9.26	9.74	10.21
	6H	9.51	9.91	10.04	10.43	10.93	9.32	9.72	9.85	10.24	10.74
	8H	9.85	10.20	10.36	10.70	11.27	9.63	9.99	10.15	10.48	11.06