

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428607

Luminaire Tested: SQ2W-WBN-K-050U-100D-L940-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1428607
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G3-2308-130-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-WBN-K-050U-100D-L940-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - WHITE DISCREET BAFFLE, NARROW 35-DEGREE OPTIC
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 500 LUMENS PER FOOT
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6642.7 lumens
Efficiency: N/A
Efficacy: 125.3 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.58 / 0.63
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 53
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1428607

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L940-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

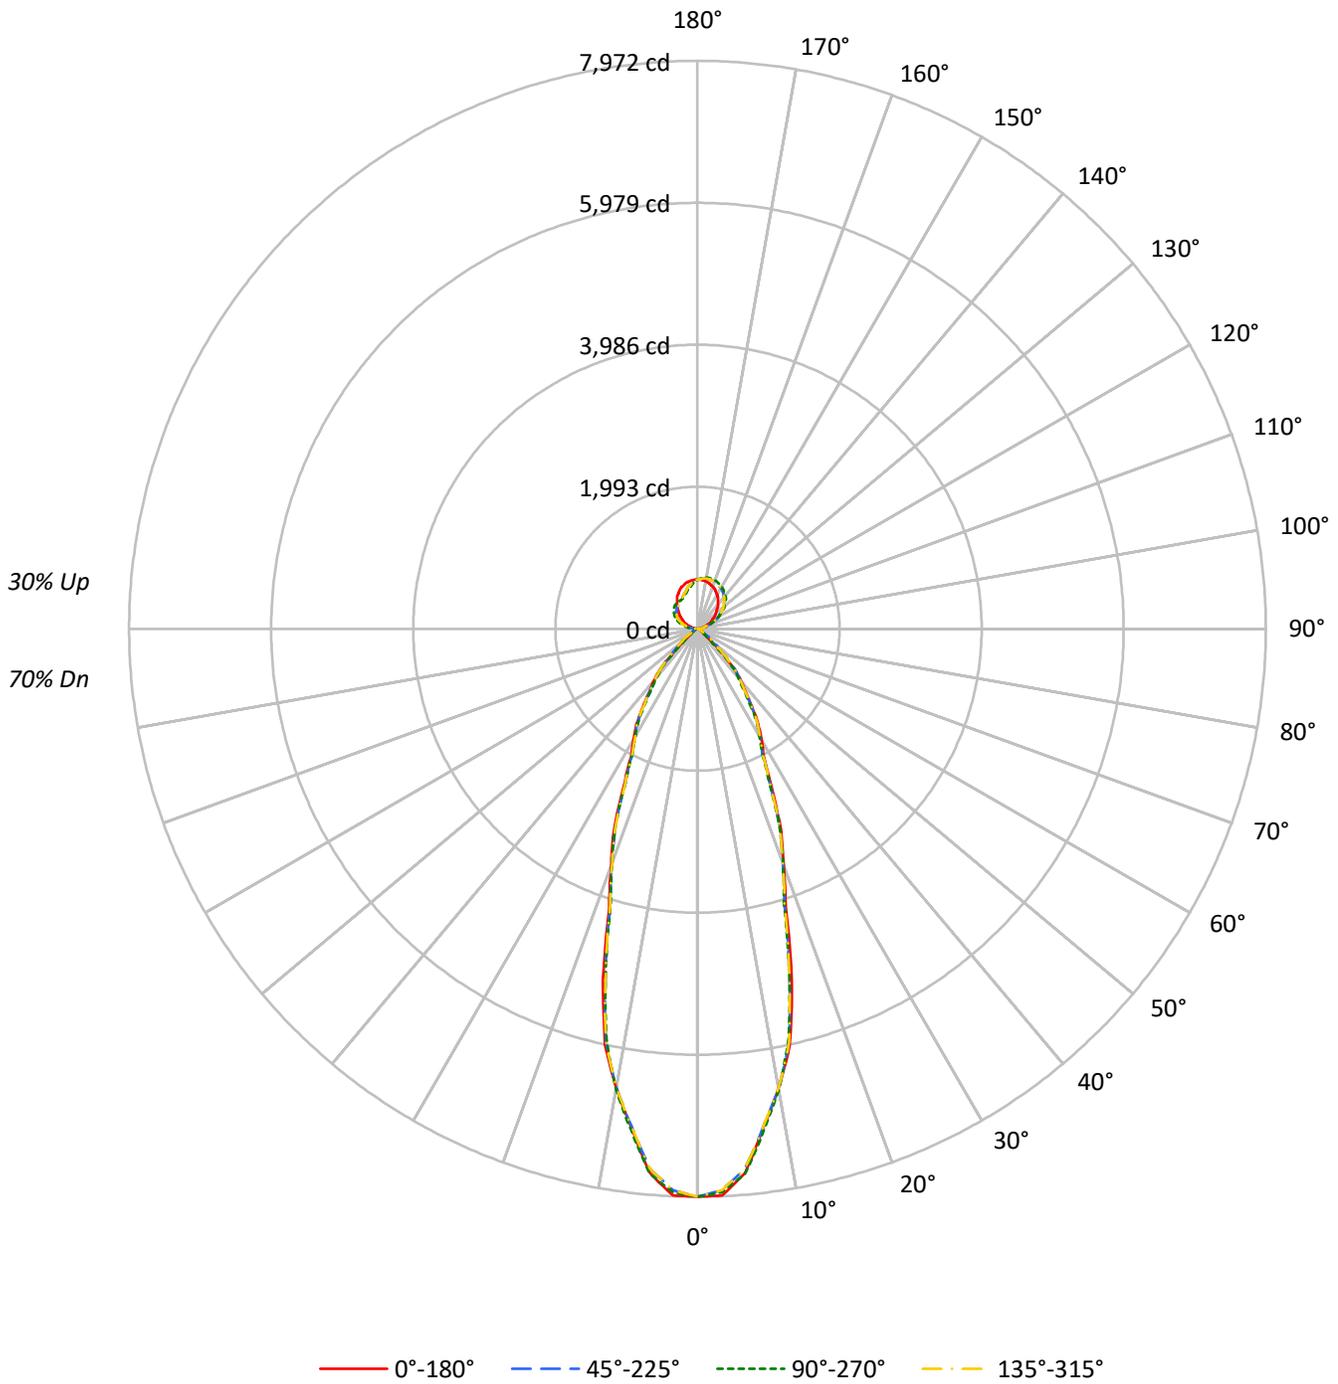



TEST NUMBER: P1428607

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L940-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20											
RC	80					70					50					30					10					0						
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0					
RCR																																
0	112	112	112	112	106	106	106	106	94	94	94	84	84	84	74	74	74	74	74	74	74	74	74	74	74	74	74	70				
1	105	102	99	97	100	97	95	92	87	86	84	79	77	76	70	70	69	69	69	69	69	69	69	69	69	69	69	65				
2	99	93	89	85	94	89	85	82	81	78	75	73	71	69	67	65	64	64	64	64	64	64	64	64	64	64	64	60				
3	93	86	80	76	88	82	77	73	75	72	68	69	66	64	63	61	59	59	59	59	59	59	59	59	59	59	59	56				
4	88	79	73	69	83	76	71	67	70	66	63	65	61	59	59	57	55	55	55	55	55	55	55	55	55	55	55	52				
5	83	73	67	63	79	71	65	61	66	61	58	61	57	54	56	53	51	51	51	51	51	51	51	51	51	51	51	49				
6	78	68	62	57	74	66	60	56	61	57	53	57	53	51	53	50	48	48	48	48	48	48	48	48	48	48	48	46				
7	74	64	58	53	70	62	56	52	58	53	50	54	50	47	50	47	45	45	45	45	45	45	45	45	45	45	45	43				
8	70	60	54	49	67	58	52	48	54	50	46	51	47	44	48	45	42	42	42	42	42	42	42	42	42	42	42	41				
9	66	56	50	46	64	55	49	45	51	47	43	48	45	42	46	42	40	40	40	40	40	40	40	40	40	40	40	38				
10	63	53	47	43	61	52	46	42	49	44	41	46	42	39	43	40	38	38	38	38	38	38	38	38	38	38	38	36				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	128719	128719	128719	128719
5°	124282	124420	124282	124420
10°	107424	107680	107424	107680
15°	85483	83119	85483	83119
20°	60725	60361	60725	60361
25°	43689	42529	43689	42529
30°	33381	32406	33381	32406
35°	26203	25089	26203	25089
40°	19852	18630	19852	18630
45°	11108	9914	11108	9914
50°	3908	3446	3908	3446
55°	2390	2269	2390	2269
60°	1828	1689	1828	1689
65°	1673	1566	1673	1566
70°	1600	1468	1600	1468
75°	1497	1410	1497	1410
80°	1311	1311	1311	1311
85°	1315	1056	1315	1056

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 13173 cd/sqm



TEST NUMBER: P1428607

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L940-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	692.0	10.4
10°-20°	1375.4	20.7
20°-30°	1139.0	17.1
30°-40°	819.4	12.3
40°-50°	417.4	6.3
50°-60°	108.5	1.6
60°-70°	45.1	0.7
70°-80°	25.0	0.4
80°-90°	10.3	0.2
90°-100°	54.8	0.8
100°-110°	159.8	2.4
110°-120°	260.8	3.9
120°-130°	330.9	5.0
130°-140°	354.1	5.3
140°-150°	330.7	5.0
150°-160°	272.1	4.1
160°-170°	182.5	2.7
170°-180°	64.8	1.0
0°-30°	3206.5	48.3
0°-40°	4025.9	60.6
0°-60°	4551.9	68.5
0°-90°	4632.2	69.7
90°-120°	475.4	7.2
90°-150°	1491.1	22.4
90°-180°	2010.0	30.3
0°-180°	6642.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	7972	7972	7972	7972	7972	
5°	7668	7677	7668	7677	7668	692
15°	5114	4973	5114	4973	5114	1388
25°	2452	2387	2452	2387	2452	1153
35°	1329	1273	1329	1273	1329	834
45°	486	434	486	434	486	389
55°	85	81	85	81	85	83
65°	44	41	44	41	44	44
75°	24	23	24	23	24	25
85°	7	6	7	6	7	7
90°	2	15	2	30	2	2
95°	22	16	22	94	22	26
105°	102	163	102	224	102	108
115°	195	270	195	332	195	192
125°	288	428	288	408	288	258
135°	392	560	392	451	392	303
145°	500	645	500	461	500	313
155°	594	701	594	478	594	273
165°	657	731	657	551	657	185
175°	686	716	686	646	686	65
180°	689	689	689	689	689	



TEST NUMBER: P1428607

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4
2.5°	7959.9	7953.9	7947.9	7921.1	7887.4	7884.6	7912.8	7932.1	7925.1	7918.1	7925.1
5°	7668.3	7663.3	7658.2	7635.3	7606.4	7616.4	7665.5	7699.4	7688.1	7676.8	7688.1
7.5°	7066.1	7070.4	7074.6	7062.9	7045.8	7058.9	7102.3	7131.8	7119.7	7107.7	7119.7
10°	6552.4	6563.7	6575.0	6559.0	6533.9	6553.0	6616.5	6653.5	6610.7	6568.0	6610.7
12.5°	5985.6	5978.3	5971.0	5956.3	5939.2	5935.8	5946.0	5947.7	5924.1	5900.4	5924.1
15°	5114.1	5087.7	5061.3	5020.7	4975.5	4960.7	4976.4	4986.5	4979.6	4972.7	4979.6
17.5°	4119.3	4129.5	4139.6	4112.2	4072.2	4051.5	4050.0	4046.9	4039.1	4031.3	4039.1
20°	3534.3	3537.5	3540.6	3523.5	3499.6	3493.9	3506.5	3515.6	3514.4	3513.1	3514.4
22.5°	3063.6	3064.3	3064.9	3042.2	3011.8	3005.9	3024.5	3035.6	3024.3	3013.0	3024.3
25°	2452.4	2450.5	2448.6	2433.5	2414.0	2399.6	2390.2	2383.6	2385.4	2387.3	2385.4
27.5°	2011.1	2003.3	1995.5	1982.6	1968.1	1963.9	1970.2	1973.8	1969.1	1964.5	1969.1
30°	1790.5	1784.2	1777.9	1765.0	1750.0	1744.3	1748.1	1749.5	1743.8	1738.2	1743.8
32.5°	1592.5	1592.7	1593.0	1581.4	1565.8	1557.1	1555.3	1553.0	1548.8	1544.7	1548.8
35°	1329.4	1333.2	1337.0	1327.5	1313.7	1302.1	1292.7	1284.2	1278.5	1272.9	1278.5
37.5°	1094.7	1098.2	1101.7	1093.8	1082.1	1069.4	1055.5	1044.0	1039.2	1034.4	1039.2
40°	941.9	944.4	946.9	941.4	933.3	921.0	904.7	891.5	887.7	883.9	887.7
42.5°	775.6	786.2	796.7	793.2	785.1	773.3	758.0	744.4	736.1	727.8	736.1
45°	486.5	519.8	553.1	568.1	576.9	572.8	555.8	531.0	482.6	434.2	482.6
47.5°	246.1	292.2	338.4	371.5	400.3	391.1	344.0	296.7	249.2	201.7	249.2
50°	155.6	187.6	219.7	260.2	303.6	294.2	231.9	179.9	158.6	137.2	158.6
52.5°	119.4	135.8	152.3	190.8	236.7	232.3	177.6	133.7	121.8	110.0	121.8
55°	84.9	91.1	97.4	118.8	145.2	143.6	114.1	90.7	85.6	80.6	85.6
57.5°	65.6	69.1	72.7	80.6	90.0	89.2	78.0	68.8	65.7	62.5	65.7
60°	56.6	59.1	61.6	65.5	69.9	69.3	63.6	58.6	55.5	52.3	55.5
62.5°	50.9	52.4	53.9	55.7	57.6	56.7	53.1	50.1	48.9	47.8	48.9
65°	43.8	44.5	45.1	45.3	45.3	44.6	43.4	42.3	41.6	41.0	41.6
67.5°	37.3	38.0	38.6	38.7	38.5	38.2	37.5	36.9	36.3	35.6	36.3
70°	33.9	34.6	35.2	34.9	34.3	33.6	33.0	32.4	31.7	31.1	31.7
72.5°	29.4	30.0	30.7	30.4	29.7	29.4	29.2	29.0	28.3	27.7	28.3
75°	24.0	24.0	24.0	24.0	24.0	23.7	23.1	22.6	22.6	22.6	22.6
77.5°	18.7	18.8	18.9	18.5	17.9	17.5	17.5	17.4	16.9	16.4	16.9
80°	14.1	14.8	15.4	15.1	14.5	14.1	14.1	14.1	14.1	14.1	14.1
82.5°	11.9	12.0	12.1	11.7	11.1	10.7	10.7	10.7	10.7	10.7	10.7
85°	7.1	7.1	7.1	6.6	6.0	6.0	6.6	6.9	6.3	5.7	6.3
87.5°	2.7	3.2	3.9	4.5	4.9	5.0	5.0	5.2	5.3	5.3	5.3
90°	2.1	4.9	8.3	11.1	13.2	13.9	13.9	14.6	15.3	15.3	15.3
92.5°	7.7	12.1	12.2	12.2	14.9	16.1	17.2	17.4	18.1	18.1	18.1
95°	21.6	23.6	35.5	34.8	23.6	18.8	16.0	16.0	16.0	16.0	16.0
97.5°	41.2	44.2	46.2	61.9	65.4	63.2	51.5	43.3	38.7	36.6	38.7
100°	58.4	59.8	64.0	64.7	82.1	98.8	90.4	80.0	76.5	74.4	76.5
102.5°	75.7	76.5	82.9	85.8	89.9	99.3	128.3	125.1	122.7	122.3	122.7
105°	101.5	102.2	114.1	119.6	122.4	122.4	121.7	135.6	157.9	162.7	157.9
107.5°	129.2	132.4	146.3	161.2	164.4	165.3	161.6	159.5	158.7	159.3	158.7
110°	148.1	153.0	169.7	188.5	193.4	194.7	193.4	191.3	189.9	189.9	189.9

TEST NUMBER: P1428607

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	166.5	173.6	192.5	214.1	222.3	226.5	223.4	221.9	220.5	221.6	220.5
115°	194.7	205.2	230.2	252.5	269.2	271.2	270.6	270.6	269.9	269.9	269.9
117.5°	220.9	237.6	265.7	291.6	310.9	316.5	319.2	318.4	317.6	319.0	317.6
120°	239.3	258.7	290.7	319.9	338.7	347.1	349.8	348.4	349.8	348.4	349.8
122.5°	258.7	282.7	314.1	344.4	366.5	376.0	379.3	379.6	379.9	379.1	379.9
125°	287.9	317.2	354.0	385.3	408.3	419.4	422.2	422.9	424.3	427.7	424.3
127.5°	317.4	350.5	391.0	421.2	444.7	458.2	462.5	464.0	467.0	468.5	467.0
130°	338.0	375.6	416.6	445.1	468.1	482.7	490.3	492.4	495.9	495.2	495.9
132.5°	359.7	398.9	440.5	470.2	491.4	507.2	513.7	519.7	520.9	521.9	520.9
135°	391.6	434.0	475.7	504.9	525.1	540.4	548.8	554.3	557.8	559.9	557.8
137.5°	425.1	469.9	509.9	536.0	556.3	569.5	578.9	584.8	588.4	590.1	588.4
140°	447.9	491.0	530.0	557.1	575.2	588.4	596.7	603.7	607.9	607.9	607.9
142.5°	469.6	512.2	550.0	577.1	593.0	605.1	614.0	619.3	624.0	624.0	624.0
145°	500.1	542.5	577.3	604.4	617.6	628.7	638.5	642.6	645.4	645.4	645.4
147.5°	531.9	569.5	601.2	627.2	638.3	651.4	659.1	662.4	665.9	664.3	665.9
150°	550.8	585.6	616.2	640.6	651.7	664.2	671.9	674.6	678.1	676.0	678.1
152.5°	569.2	602.3	630.1	652.8	662.3	674.8	683.5	686.3	688.7	687.2	688.7
155°	594.0	623.2	648.9	669.8	678.1	689.9	698.3	701.8	704.5	701.1	704.5
157.5°	616.1	641.3	663.7	682.8	691.8	701.9	709.7	714.0	716.8	715.3	716.8
160°	629.4	652.4	672.6	690.6	699.0	708.0	716.4	721.2	724.0	721.9	724.0
162.5°	640.6	661.3	680.3	696.8	704.0	711.9	721.9	726.2	729.0	726.4	729.0
165°	656.6	673.3	689.9	703.9	710.1	716.4	726.8	731.7	733.8	731.0	733.8
167.5°	668.7	681.5	695.0	706.9	711.5	717.6	728.1	732.1	734.7	731.3	734.7
170°	675.3	686.5	698.3	708.0	711.5	717.1	727.5	731.0	733.1	729.6	733.1
172.5°	680.9	689.2	698.8	707.5	709.3	713.7	723.6	727.1	728.6	725.7	728.6
175°	686.5	691.3	698.3	703.9	703.2	705.9	714.3	717.1	719.9	715.7	719.9
177.5°	689.1	691.3	693.6	696.9	694.7	694.7	700.8	702.5	703.0	700.8	703.0
180°	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6



TEST NUMBER: P1428607

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4
2.5°	7932.1	7912.8	7884.6	7887.4	7921.1	7947.9	7953.9	7959.9	7953.9	7947.9	7921.1
5°	7699.4	7665.5	7616.4	7606.4	7635.3	7658.2	7663.3	7668.3	7663.3	7658.2	7635.3
7.5°	7131.8	7102.3	7058.9	7045.8	7062.9	7074.6	7070.4	7066.1	7070.4	7074.6	7062.9
10°	6653.5	6616.5	6553.0	6533.9	6559.0	6575.0	6563.7	6552.4	6563.7	6575.0	6559.0
12.5°	5947.7	5946.0	5935.8	5939.2	5956.3	5971.0	5978.3	5985.6	5978.3	5971.0	5956.3
15°	4986.5	4976.4	4960.7	4975.5	5020.7	5061.3	5087.7	5114.1	5087.7	5061.3	5020.7
17.5°	4046.9	4050.0	4051.5	4072.2	4112.2	4139.6	4129.5	4119.3	4129.5	4139.6	4112.2
20°	3515.6	3506.5	3493.9	3499.6	3523.5	3540.6	3537.5	3534.3	3537.5	3540.6	3523.5
22.5°	3035.6	3024.5	3005.9	3011.8	3042.2	3064.9	3064.3	3063.6	3064.3	3064.9	3042.2
25°	2383.6	2390.2	2399.6	2414.0	2433.5	2448.6	2450.5	2452.4	2450.5	2448.6	2433.5
27.5°	1973.8	1970.2	1963.9	1968.1	1982.6	1995.5	2003.3	2011.1	2003.3	1995.5	1982.6
30°	1749.5	1748.1	1744.3	1750.0	1765.0	1777.9	1784.2	1790.5	1784.2	1777.9	1765.0
32.5°	1553.0	1555.3	1557.1	1565.8	1581.4	1593.0	1592.7	1592.5	1592.7	1593.0	1581.4
35°	1284.2	1292.7	1302.1	1313.7	1327.5	1337.0	1333.2	1329.4	1333.2	1337.0	1327.5
37.5°	1044.0	1055.5	1069.4	1082.1	1093.8	1101.7	1098.2	1094.7	1098.2	1101.7	1093.8
40°	891.5	904.7	921.0	933.3	941.4	946.9	944.4	941.9	944.4	946.9	941.4
42.5°	744.4	758.0	773.3	785.1	793.2	796.7	786.2	775.6	786.2	796.7	793.2
45°	531.0	555.8	572.8	576.9	568.1	553.1	519.8	486.5	519.8	553.1	568.1
47.5°	296.7	344.0	391.1	400.3	371.5	338.4	292.2	246.1	292.2	338.4	371.5
50°	179.9	231.9	294.2	303.6	260.2	219.7	187.6	155.6	187.6	219.7	260.2
52.5°	133.7	177.6	232.3	236.7	190.8	152.3	135.8	119.4	135.8	152.3	190.8
55°	90.7	114.1	143.6	145.2	118.8	97.4	91.1	84.9	91.1	97.4	118.8
57.5°	68.8	78.0	89.2	90.0	80.6	72.7	69.1	65.6	69.1	72.7	80.6
60°	58.6	63.6	69.3	69.9	65.5	61.6	59.1	56.6	59.1	61.6	65.5
62.5°	50.1	53.1	56.7	57.6	55.7	53.9	52.4	50.9	52.4	53.9	55.7
65°	42.3	43.4	44.6	45.3	45.3	45.1	44.5	43.8	44.5	45.1	45.3
67.5°	36.9	37.5	38.2	38.5	38.7	38.6	38.0	37.3	38.0	38.6	38.7
70°	32.4	33.0	33.6	34.3	34.9	35.2	34.6	33.9	34.6	35.2	34.9
72.5°	29.0	29.2	29.4	29.7	30.4	30.7	30.0	29.4	30.0	30.7	30.4
75°	22.6	23.1	23.7	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
77.5°	17.4	17.5	17.5	17.9	18.5	18.9	18.8	18.7	18.8	18.9	18.5
80°	14.1	14.1	14.1	14.5	15.1	15.4	14.8	14.1	14.8	15.4	15.1
82.5°	10.7	10.7	10.7	11.1	11.7	12.1	12.0	11.9	12.0	12.1	11.7
85°	6.9	6.6	6.0	6.0	6.6	7.1	7.1	7.1	7.1	7.1	6.6
87.5°	5.2	5.0	5.0	4.9	4.5	3.9	3.2	2.7	3.2	3.8	4.8
90°	14.6	13.9	13.9	13.2	11.1	8.3	4.9	2.1	4.9	7.7	12.5
92.5°	17.4	17.2	16.1	14.9	12.2	12.2	12.1	7.7	13.2	18.8	27.0
95°	16.0	16.0	18.8	23.6	34.8	35.5	23.6	21.6	30.6	43.1	54.2
97.5°	43.3	51.5	63.2	65.4	61.9	46.2	44.2	41.2	56.1	68.4	86.4
100°	80.0	90.4	98.8	82.1	64.7	64.0	59.8	58.4	74.4	86.2	103.6
102.5°	125.1	128.3	99.3	89.9	85.8	82.9	76.5	75.7	91.7	107.9	122.5
105°	135.6	121.7	122.4	122.4	119.6	114.1	102.2	101.5	119.6	138.4	156.5
107.5°	159.5	161.6	165.3	164.4	161.2	146.3	132.4	129.2	145.5	168.0	187.9
110°	191.3	193.4	194.7	193.4	188.5	169.7	153.0	148.1	162.7	186.4	208.0



TEST NUMBER: P1428607

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	221.9	223.4	226.5	222.3	214.1	192.5	173.6	166.5	181.1	205.3	227.4
115°	270.6	270.6	271.2	269.2	252.5	230.2	205.2	194.7	207.3	229.5	253.9
117.5°	318.4	319.2	316.5	310.9	291.6	265.7	237.6	220.9	230.8	254.3	279.3
120°	348.4	349.8	347.1	338.7	319.9	290.7	258.7	239.3	246.9	269.9	294.9
122.5°	379.6	379.3	376.0	366.5	344.4	314.1	282.7	258.7	261.9	283.2	307.7
125°	422.9	422.2	419.4	408.3	385.3	354.0	317.2	287.9	283.8	301.9	326.9
127.5°	464.0	462.5	458.2	444.7	421.2	391.0	350.5	317.4	308.1	319.5	342.5
130°	492.4	490.3	482.7	468.1	445.1	416.6	375.6	338.0	324.8	331.8	351.9
132.5°	519.7	513.7	507.2	491.4	470.2	440.5	398.9	359.7	341.5	344.6	360.3
135°	554.3	548.8	540.4	525.1	504.9	475.7	434.0	391.6	366.5	363.8	372.8
137.5°	584.8	578.9	569.5	556.3	536.0	509.9	469.9	425.1	393.5	384.2	387.7
140°	603.7	596.7	588.4	575.2	557.1	530.0	491.0	447.9	412.4	399.2	397.1
142.5°	619.3	614.0	605.1	593.0	577.1	550.0	512.2	469.6	431.9	414.8	409.9
145°	642.6	638.5	628.7	617.6	604.4	577.3	542.5	500.1	462.5	440.3	429.8
147.5°	662.4	659.1	651.4	638.3	627.2	601.2	569.5	531.9	493.4	465.9	452.4
150°	674.6	671.9	664.2	651.7	640.6	616.2	585.6	550.8	514.0	484.8	467.4
152.5°	686.3	683.5	674.8	662.3	652.8	630.1	602.3	569.2	531.8	502.6	484.6
155°	701.8	698.3	689.9	678.1	669.8	648.9	623.2	594.0	562.0	531.4	511.2
157.5°	714.0	709.7	701.9	691.8	682.8	663.7	641.3	616.1	588.1	558.9	538.3
160°	721.2	716.4	708.0	699.0	690.6	672.6	652.4	629.4	603.7	577.3	555.0
162.5°	726.2	721.9	711.9	704.0	696.8	680.3	661.3	640.6	617.6	594.5	573.9
165°	731.7	726.8	716.4	710.1	703.9	689.9	673.3	656.6	637.1	618.3	601.6
167.5°	732.1	728.1	717.6	711.5	706.9	695.0	681.5	668.7	653.5	638.8	624.8
170°	731.0	727.5	717.1	711.5	708.0	698.3	686.5	675.3	663.5	651.0	639.9
172.5°	727.1	723.6	713.7	709.3	707.5	698.8	689.2	680.9	670.7	661.6	652.7
175°	717.1	714.3	705.9	703.2	703.9	698.3	691.3	686.5	680.2	674.6	669.8
177.5°	702.5	700.8	694.7	694.7	696.9	693.6	691.3	689.1	686.3	684.7	683.0
180°	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6



TEST NUMBER: P1428607

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4	7972.4
2.5°	7887.4	7884.6	7912.8	7932.1	7925.1	7918.1	7925.1	7932.1	7912.8	7884.6	7887.4
5°	7606.4	7616.4	7665.5	7699.4	7688.1	7676.8	7688.1	7699.4	7665.5	7616.4	7606.4
7.5°	7045.8	7058.9	7102.3	7131.8	7119.7	7107.7	7119.7	7131.8	7102.3	7058.9	7045.8
10°	6533.9	6553.0	6616.5	6653.5	6610.7	6568.0	6610.7	6653.5	6616.5	6553.0	6533.9
12.5°	5939.2	5935.8	5946.0	5947.7	5924.1	5900.4	5924.1	5947.7	5946.0	5935.8	5939.2
15°	4975.5	4960.7	4976.4	4986.5	4979.6	4972.7	4979.6	4986.5	4976.4	4960.7	4975.5
17.5°	4072.2	4051.5	4050.0	4046.9	4039.1	4031.3	4039.1	4046.9	4050.0	4051.5	4072.2
20°	3499.6	3493.9	3506.5	3515.6	3514.4	3513.1	3514.4	3515.6	3506.5	3493.9	3499.6
22.5°	3011.8	3005.9	3024.5	3035.6	3024.3	3013.0	3024.3	3035.6	3024.5	3005.9	3011.8
25°	2414.0	2399.6	2390.2	2383.6	2385.4	2387.3	2385.4	2383.6	2390.2	2399.6	2414.0
27.5°	1968.1	1963.9	1970.2	1973.8	1969.1	1964.5	1969.1	1973.8	1970.2	1963.9	1968.1
30°	1750.0	1744.3	1748.1	1749.5	1743.8	1738.2	1743.8	1749.5	1748.1	1744.3	1750.0
32.5°	1565.8	1557.1	1555.3	1553.0	1548.8	1544.7	1548.8	1553.0	1555.3	1557.1	1565.8
35°	1313.7	1302.1	1292.7	1284.2	1278.5	1272.9	1278.5	1284.2	1292.7	1302.1	1313.7
37.5°	1082.1	1069.4	1055.5	1044.0	1039.2	1034.4	1039.2	1044.0	1055.5	1069.4	1082.1
40°	933.3	921.0	904.7	891.5	887.7	883.9	887.7	891.5	904.7	921.0	933.3
42.5°	785.1	773.3	758.0	744.4	736.1	727.8	736.1	744.4	758.0	773.3	785.1
45°	576.9	572.8	555.8	531.0	482.6	434.2	482.6	531.0	555.8	572.8	576.9
47.5°	400.3	391.1	344.0	296.7	249.2	201.7	249.2	296.7	344.0	391.1	400.3
50°	303.6	294.2	231.9	179.9	158.6	137.2	158.6	179.9	231.9	294.2	303.6
52.5°	236.7	232.3	177.6	133.7	121.8	110.0	121.8	133.7	177.6	232.3	236.7
55°	145.2	143.6	114.1	90.7	85.6	80.6	85.6	90.7	114.1	143.6	145.2
57.5°	90.0	89.2	78.0	68.8	65.7	62.5	65.7	78.0	89.2	90.0	
60°	69.9	69.3	63.6	58.6	55.5	52.3	55.5	63.6	69.3	69.9	
62.5°	57.6	56.7	53.1	50.1	48.9	47.8	48.9	50.1	53.1	56.7	57.6
65°	45.3	44.6	43.4	42.3	41.6	41.0	41.6	42.3	43.4	44.6	45.3
67.5°	38.5	38.2	37.5	36.9	36.3	35.6	36.3	36.9	37.5	38.2	38.5
70°	34.3	33.6	33.0	32.4	31.7	31.1	31.7	32.4	33.0	33.6	34.3
72.5°	29.7	29.4	29.2	29.0	28.3	27.7	28.3	29.0	29.2	29.4	29.7
75°	24.0	23.7	23.1	22.6	22.6	22.6	22.6	22.6	23.1	23.7	24.0
77.5°	17.9	17.5	17.5	17.4	16.9	16.4	16.9	17.4	17.5	17.5	17.9
80°	14.5	14.1	14.1	14.1	14.1	14.1	14.1	14.1	14.1	14.1	14.5
82.5°	11.1	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	11.1
85°	6.0	6.0	6.6	6.9	6.3	5.7	6.3	6.9	6.6	6.0	6.0
87.5°	5.5	6.4	7.4	8.0	8.5	8.2	8.5	8.0	7.4	6.4	5.5
90°	16.0	20.9	25.7	28.5	31.3	29.9	31.3	28.5	20.9	16.0	
92.5°	32.1	40.3	46.3	51.3	53.6	53.3	53.6	51.3	40.3	32.1	
95°	64.7	74.4	84.2	91.1	95.3	93.9	95.3	91.1	84.2	74.4	64.7
97.5°	99.7	112.8	123.7	130.2	134.4	137.2	134.4	130.2	123.7	112.8	99.7
100°	123.1	135.6	148.1	155.8	162.7	165.5	162.7	155.8	148.1	135.6	123.1
102.5°	142.0	158.4	172.1	180.3	186.1	188.9	186.1	180.3	172.1	158.4	142.0
105°	173.2	190.6	205.2	215.6	221.9	224.0	221.9	215.6	205.2	190.6	173.2
107.5°	204.3	222.3	235.8	247.3	255.0	259.4	255.0	247.3	235.8	222.3	204.3
110°	228.8	243.4	258.0	268.5	276.1	278.9	276.1	268.5	258.0	243.4	228.8



TEST NUMBER: P1428607

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	249.4	265.7	280.3	290.7	299.5	303.4	299.5	290.7	280.3	265.7	249.4
115°	278.2	299.8	313.0	322.7	329.0	332.5	329.0	322.7	313.0	299.8	278.2
117.5°	302.1	324.7	339.1	346.6	349.6	352.1	349.6	346.6	339.1	324.7	302.1
120°	317.2	338.0	354.7	364.4	367.9	369.3	367.9	364.4	354.7	338.0	317.2
122.5°	331.1	350.8	366.9	378.9	384.6	386.0	384.6	378.9	366.9	350.8	331.1
125°	350.5	369.3	386.0	397.8	404.1	407.6	404.1	397.8	386.0	369.3	350.5
127.5°	367.5	387.8	403.1	413.8	419.9	422.7	419.9	413.8	403.1	387.8	367.5
130°	377.0	397.8	413.1	425.0	430.5	433.3	430.5	425.0	413.1	397.8	377.0
132.5°	384.2	406.2	422.0	432.7	438.9	441.6	438.9	432.7	422.0	406.2	384.2
135°	393.0	415.9	432.6	443.0	448.6	451.4	448.6	443.0	432.6	415.9	393.0
137.5°	400.6	421.5	438.9	449.9	454.9	456.7	454.9	449.9	438.9	421.5	400.6
140°	406.2	424.3	441.6	452.1	457.6	458.3	457.6	452.1	441.6	424.3	406.2
142.5°	413.4	427.6	442.8	453.2	458.8	460.0	458.8	453.2	442.8	427.6	413.4
145°	426.3	434.7	445.1	454.9	459.7	461.1	459.7	454.9	445.1	434.7	426.3
147.5°	442.6	445.3	450.7	457.1	461.8	462.8	461.8	457.1	445.3	442.6	442.6
150°	454.9	454.2	456.3	460.4	464.6	463.9	464.6	460.4	456.3	454.2	454.9
152.5°	468.8	464.7	464.6	466.5	468.5	468.4	468.5	466.5	464.6	464.7	468.8
155°	492.4	484.8	480.6	479.2	479.2	478.5	479.2	479.2	480.6	484.8	492.4
157.5°	518.4	507.7	501.5	498.1	497.1	495.6	497.1	498.1	501.5	507.7	518.4
160°	536.2	524.4	518.2	512.6	510.5	508.4	510.5	512.6	518.2	524.4	536.2
162.5°	552.9	541.7	534.8	529.8	527.8	524.6	527.8	529.8	534.8	541.7	552.9
165°	580.1	568.2	560.6	556.4	553.6	550.8	553.6	556.4	560.6	568.2	580.1
167.5°	607.2	594.2	589.2	584.5	581.9	576.9	581.9	584.5	589.2	594.2	607.2
170°	623.9	612.0	609.3	605.1	600.2	594.7	600.2	605.1	609.3	612.0	623.9
172.5°	638.3	630.4	627.6	623.5	621.9	617.5	621.9	623.5	627.6	630.4	638.3
175°	659.3	653.1	653.1	652.4	650.3	646.1	650.3	652.4	653.1	653.1	659.3
177.5°	676.9	673.5	675.8	675.8	675.2	671.3	675.2	675.8	675.8	673.5	676.9
180°	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6	688.6



TEST NUMBER: P1428607

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	7972.4	7972.4	7972.4	7972.4
2.5°	7921.1	7947.9	7953.9	7959.9
5°	7635.3	7658.2	7663.3	7668.3
7.5°	7062.9	7074.6	7070.4	7066.1
10°	6559.0	6575.0	6563.7	6552.4
12.5°	5956.3	5971.0	5978.3	5985.6
15°	5020.7	5061.3	5087.7	5114.1
17.5°	4112.2	4139.6	4129.5	4119.3
20°	3523.5	3540.6	3537.5	3534.3
22.5°	3042.2	3064.9	3064.3	3063.6
25°	2433.5	2448.6	2450.5	2452.4
27.5°	1982.6	1995.5	2003.3	2011.1
30°	1765.0	1777.9	1784.2	1790.5
32.5°	1581.4	1593.0	1592.7	1592.5
35°	1327.5	1337.0	1333.2	1329.4
37.5°	1093.8	1101.7	1098.2	1094.7
40°	941.4	946.9	944.4	941.9
42.5°	793.2	796.7	786.2	775.6
45°	568.1	553.1	519.8	486.5
47.5°	371.5	338.4	292.2	246.1
50°	260.2	219.7	187.6	155.6
52.5°	190.8	152.3	135.8	119.4
55°	118.8	97.4	91.1	84.9
57.5°	80.6	72.7	69.1	65.6
60°	65.5	61.6	59.1	56.6
62.5°	55.7	53.9	52.4	50.9
65°	45.3	45.1	44.5	43.8
67.5°	38.7	38.6	38.0	37.3
70°	34.9	35.2	34.6	33.9
72.5°	30.4	30.7	30.0	29.4
75°	24.0	24.0	24.0	24.0
77.5°	18.5	18.9	18.8	18.7
80°	15.1	15.4	14.8	14.1
82.5°	11.7	12.1	12.0	11.9
85°	6.6	7.1	7.1	7.1
87.5°	4.8	3.8	3.2	2.7
90°	12.5	7.7	4.9	2.1
92.5°	27.0	18.8	13.2	7.7
95°	54.2	43.1	30.6	21.6
97.5°	86.4	68.4	56.1	41.2
100°	103.6	86.2	74.4	58.4
102.5°	122.5	107.9	91.7	75.7
105°	156.5	138.4	119.6	101.5
107.5°	187.9	168.0	145.5	129.2
110°	208.0	186.4	162.7	148.1



TEST NUMBER: P1428607

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L940-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	227.4	205.3	181.1	166.5
115°	253.9	229.5	207.3	194.7
117.5°	279.3	254.3	230.8	220.9
120°	294.9	269.9	246.9	239.3
122.5°	307.7	283.2	261.9	258.7
125°	326.9	301.9	283.8	287.9
127.5°	342.5	319.5	308.1	317.4
130°	351.9	331.8	324.8	338.0
132.5°	360.3	344.6	341.5	359.7
135°	372.8	363.8	366.5	391.6
137.5°	387.7	384.2	393.5	425.1
140°	397.1	399.2	412.4	447.9
142.5°	409.9	414.8	431.9	469.6
145°	429.8	440.3	462.5	500.1
147.5°	452.4	465.9	493.4	531.9
150°	467.4	484.8	514.0	550.8
152.5°	484.6	502.6	531.8	569.2
155°	511.2	531.4	562.0	594.0
157.5°	538.3	558.9	588.1	616.1
160°	555.0	577.3	603.7	629.4
162.5°	573.9	594.5	617.6	640.6
165°	601.6	618.3	637.1	656.6
167.5°	624.8	638.8	653.5	668.7
170°	639.9	651.0	663.5	675.3
172.5°	652.7	661.6	670.7	680.9
175°	669.8	674.6	680.2	686.5
177.5°	683.0	684.7	686.3	689.1
180°	688.6	688.6	688.6	688.6



TEST NUMBER: P1428607
 CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L940-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.83	5.61	5.64	6.41	7.39	4.45	5.24	5.27	6.04	7.01
	3H	6.06	6.75	6.88	7.56	8.57	5.66	6.36	6.49	7.17	8.17
	4H	6.58	7.23	7.42	8.04	9.06	6.18	6.83	7.02	7.65	8.66
	6H	6.93	7.53	7.78	8.35	9.38	6.51	7.11	7.36	7.93	8.96
	8H	7.08	7.64	7.94	8.48	9.51	6.65	7.21	7.51	8.05	9.08
	12H	7.17	7.71	8.03	8.54	9.59	6.72	7.25	7.58	8.09	9.14
4H	2H	5.15	5.80	6.00	6.62	7.64	4.84	5.49	5.69	6.31	7.33
	3H	6.65	7.19	7.50	8.04	9.07	6.31	6.84	7.16	7.69	8.72
	4H	7.30	7.78	8.16	8.63	9.69	6.94	7.42	7.80	8.27	9.33
	6H	7.79	8.20	8.67	9.07	10.14	7.40	7.81	8.28	8.68	9.75
	8H	8.00	8.38	8.88	9.25	10.32	7.59	7.97	8.47	8.84	9.92
	12H	8.13	8.48	9.03	9.36	10.44	7.70	8.04	8.59	8.93	10.01
8H	4H	7.46	7.84	8.34	8.71	9.78	7.14	7.52	8.02	8.39	9.46
	6H	8.09	8.40	9.00	9.31	10.39	7.73	8.04	8.64	8.96	10.03
	8H	8.40	8.68	9.32	9.59	10.68	8.01	8.29	8.93	9.20	10.29
	12H	8.64	8.88	9.55	9.77	10.92	8.22	8.46	9.13	9.35	10.50
12H	4H	7.44	7.78	8.33	8.67	9.74	7.13	7.47	8.03	8.36	9.44
	6H	8.12	8.40	9.04	9.30	10.39	7.78	8.05	8.69	8.96	10.05
	8H	8.47	8.71	9.39	9.61	10.76	8.10	8.34	9.01	9.23	10.38