

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P709355

Luminaire Tested: DL2W-WB-M-075U-100D-930-UNV-STD-W-WM-4

Issue Date: 3/5/2020

Test Information

Test Method: LM-79-2019
Report Number: P709355
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2303-941-3, G3-2104-222-7)
Test Lab: INNOVATION CENTER
Issue Date: 3/5/2020
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: DL2W-WB-M-075U-100D-930-UNV-STD-W-WM-4
Description: CORELITE DISCREET DL2W WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6977.1 lumens
Efficiency: N/A
Efficacy: 113.1 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.24 / 1.18
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 61.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P709355

CATALOG NUMBER: DL2W-WB-M-075U-100D-930-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

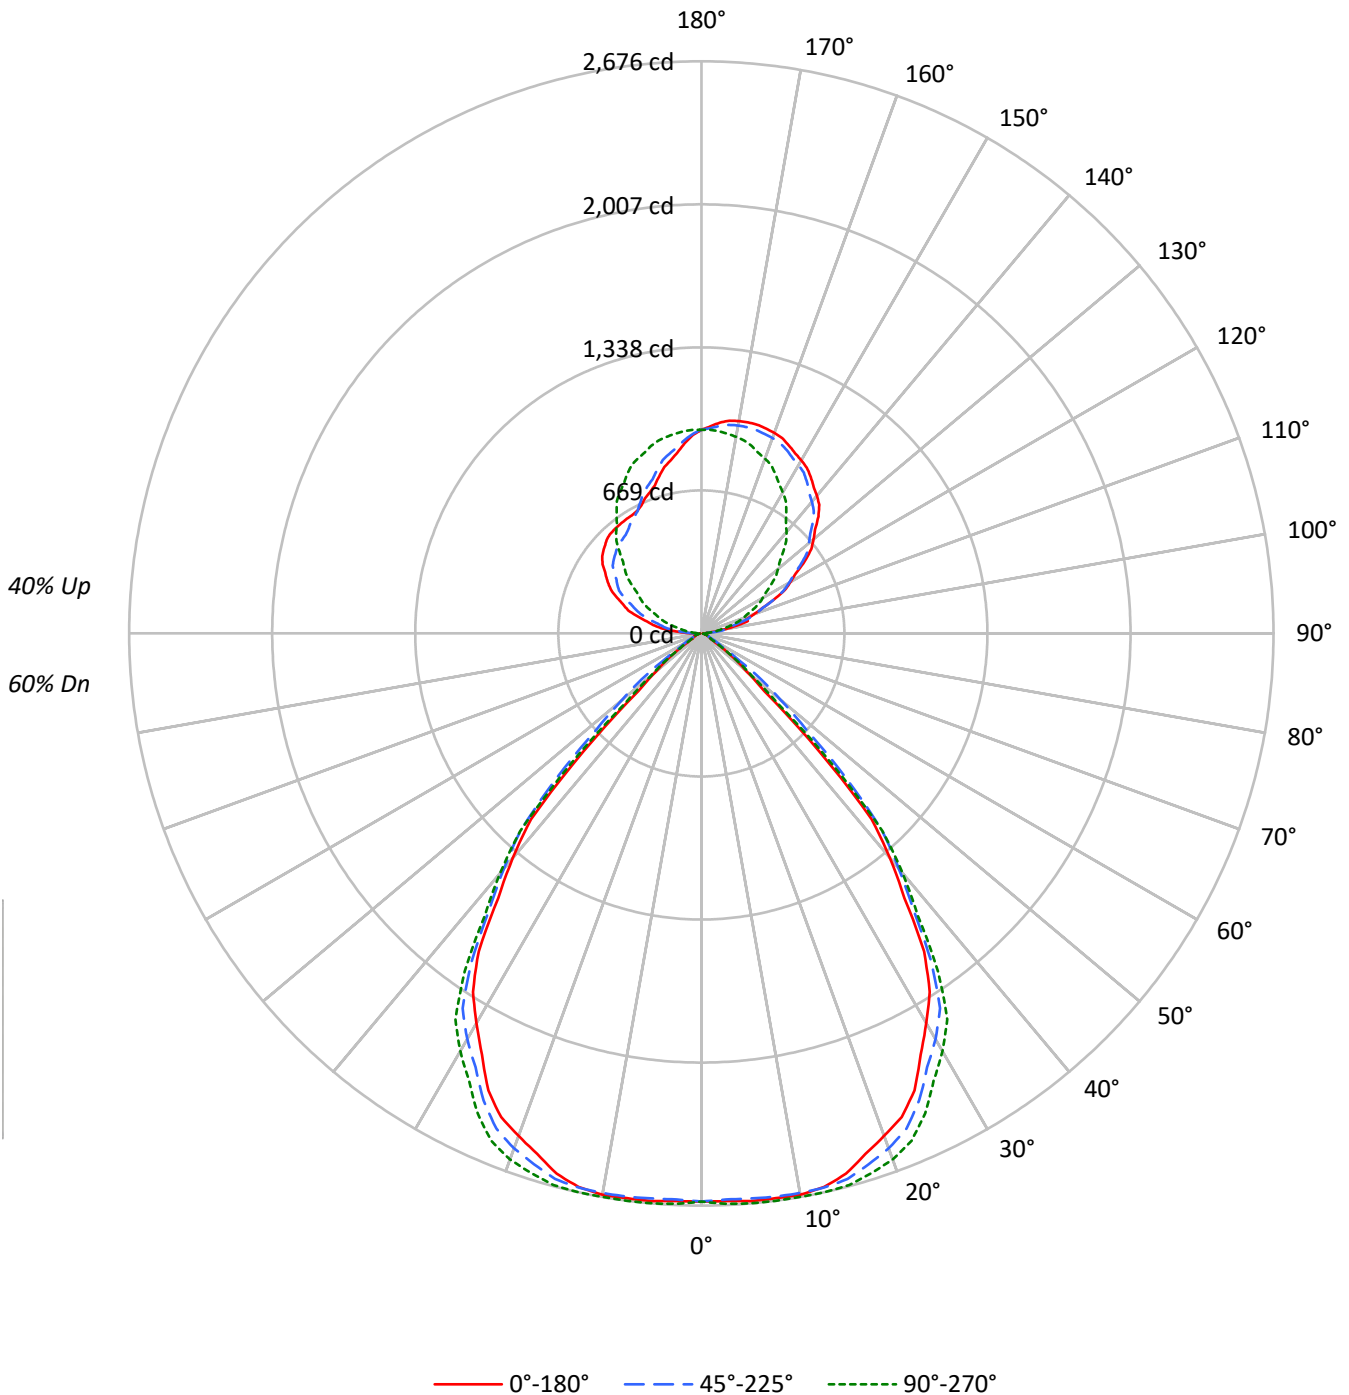

TEST NUMBER: P709355

CATALOG NUMBER: DL2W-WB-M-075U-100D-930-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	65	65	65	60																			
1	102	99	95	93	96	93	90	87	81	79	77	71	69	68	61	60	59	55																			
2	95	89	84	79	89	84	79	75	74	71	68	65	63	61	57	55	54	50																			
3	88	80	74	69	83	76	70	66	67	63	60	60	57	54	52	50	48	45																			
4	82	73	66	61	77	69	63	58	62	57	53	55	51	48	48	46	44	41																			
5	76	66	59	54	72	63	56	52	56	51	48	50	47	44	45	42	40	37																			
6	71	60	53	48	67	57	51	46	52	47	43	46	43	40	42	39	36	34																			
7	66	55	48	43	62	53	46	42	48	43	39	43	39	36	39	35	33	31																			
8	62	51	44	39	58	48	42	38	44	39	35	40	36	33	36	33	30	28																			
9	58	47	40	35	55	45	39	34	41	36	32	37	33	30	34	30	28	26																			
10	55	43	37	32	51	42	35	31	38	33	29	35	30	28	31	28	26	24																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	42899	42899	42899	42899	42899
5°	43188	42996	43358	42996	43188
10°	43702	43562	43860	43562	43702
15°	43721	44157	44637	44157	43721
20°	42959	44033	44974	44033	42959
25°	42006	42942	44113	42942	42006
30°	39209	40834	42041	40834	39209
35°	35784	36941	38041	36941	35784
40°	28922	30290	30888	30290	28922
45°	17785	21892	19783	21892	17785
50°	6980	12152	7754	12152	6980
55°	3654	5534	3654	5534	3654
60°	1582	2719	1741	2719	1582
65°	1471	1641	1578	1641	1471
70°	1407	1548	1496	1548	1407
75°	1379	1500	1497	1500	1379
80°	1339	1441	1432	1441	1339
85°	1241	1260	1241	1260	1241

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 60°
 Vertical Angle: 45°
 Luminance: 22112 cd/sqm

TEST NUMBER: P709355

CATALOG NUMBER: DL2W-WB-M-075U-100D-930-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	254.5	3.6
10°-20°	745.9	10.7
20°-30°	1107.0	15.9
30°-40°	1149.8	16.5
40°-50°	691.9	9.9
50°-60°	165.7	2.4
60°-70°	44.9	0.6
70°-80°	25.2	0.4
80°-90°	11.8	0.2
90°-100°	75.8	1.1
100°-110°	221.0	3.2
110°-120°	360.6	5.2
120°-130°	457.6	6.6
130°-140°	489.7	7.0
140°-150°	457.2	6.6
150°-160°	376.3	5.4
160°-170°	252.3	3.6
170°-180°	89.6	1.3
0°-30°	2107.4	30.2
0°-40°	3257.3	46.7
0°-60°	4114.9	59.0
0°-90°	4196.9	60.2
90°-120°	657.4	9.4
90°-150°	2062.0	29.6
90°-180°	2780.0	39.8
0°-180°	6977.1	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	2657	2657	2657	2657	2657	
5°	2665	2653	2675	2653	2665	254
15°	2616	2642	2670	2642	2616	735
25°	2358	2410	2476	2410	2358	1074
35°	1816	1874	1930	1874	1816	1106
45°	779	959	866	959	779	603
55°	130	197	130	197	130	127
65°	38	43	41	43	38	39
75°	22	24	24	24	22	23
85°	7	7	7	7	7	8
90°	21	19	3	26	41	10
95°	22	29	30	96	130	37
105°	225	169	140	252	310	210
115°	373	374	269	400	460	369
125°	592	572	398	498	564	525
135°	774	737	542	559	624	593
145°	892	862	692	595	638	558
155°	970	946	821	676	662	448
165°	1011	986	908	794	762	285
175°	990	974	949	907	894	95
180°	952	952	952	952	952	

TEST NUMBER: P709355

CATALOG NUMBER: DL2W-WB-M-075U-100D-930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2657.0	2657.0	2657.0	2657.0	2657.0	2657.0	2657.0	2657.0	2657.0	2657.0	2657.0
2.5°	2657.0	2661.1	2665.2	2659.0	2649.5	2648.9	2657.5	2664.6	2667.3	2670.1	2667.3
5°	2664.7	2669.4	2674.1	2665.9	2653.6	2652.1	2661.5	2669.3	2672.3	2675.2	2672.3
7.5°	2664.1	2669.3	2674.5	2667.6	2656.7	2656.8	2668.0	2676.4	2676.2	2676.0	2676.2
10°	2665.6	2669.5	2673.3	2666.6	2656.3	2657.8	2671.1	2680.4	2677.8	2675.2	2677.8
12.5°	2651.8	2657.7	2663.6	2659.4	2651.9	2656.5	2673.1	2684.6	2680.3	2676.0	2680.3
15°	2615.6	2624.2	2632.7	2635.2	2635.6	2647.8	2671.7	2687.5	2679.0	2670.4	2679.0
17.5°	2552.5	2562.6	2572.7	2582.5	2592.1	2613.2	2645.6	2667.2	2656.6	2646.0	2656.6
20°	2500.2	2511.3	2522.5	2535.8	2549.9	2575.6	2612.7	2638.1	2627.8	2617.5	2627.8
22.5°	2447.9	2456.0	2464.0	2477.3	2492.5	2520.5	2561.5	2589.5	2578.9	2568.3	2578.9
25°	2357.9	2364.3	2370.7	2382.9	2397.0	2423.9	2463.7	2491.6	2483.9	2476.2	2483.9
27.5°	2221.5	2232.5	2243.4	2258.4	2274.7	2300.2	2334.7	2360.0	2357.5	2355.0	2357.5
30°	2103.1	2121.9	2140.7	2159.2	2177.5	2203.0	2235.5	2259.3	2257.1	2255.0	2257.1
32.5°	1987.7	2007.2	2026.7	2046.6	2066.7	2089.0	2113.7	2133.0	2136.7	2140.4	2136.7
35°	1815.5	1825.0	1834.4	1849.2	1865.9	1882.5	1899.2	1913.7	1921.9	1930.0	1921.9
37.5°	1560.7	1572.0	1583.3	1601.1	1621.1	1637.2	1649.4	1659.1	1661.2	1663.2	1661.2
40°	1372.2	1385.9	1399.6	1413.9	1428.4	1445.8	1465.8	1479.2	1472.4	1465.5	1472.4
42.5°	1179.1	1190.8	1202.4	1220.8	1241.5	1260.7	1278.4	1287.5	1270.7	1254.0	1270.7
45°	778.9	841.3	903.7	933.7	953.0	964.5	968.4	959.6	913.0	866.4	913.0
47.5°	399.5	463.3	527.2	591.5	656.1	671.7	638.6	599.1	540.4	481.8	540.4
50°	277.9	299.7	321.5	390.7	475.8	491.8	438.8	389.0	348.9	308.7	348.9
52.5°	204.8	216.7	228.6	282.0	349.3	356.9	305.0	260.5	238.4	216.4	238.4
55°	129.8	134.9	140.1	164.8	196.0	197.2	168.6	145.2	137.5	129.8	137.5
57.5°	76.7	84.9	93.0	103.4	114.6	114.6	103.5	93.3	85.9	78.5	85.9
60°	49.0	55.5	61.9	72.1	83.7	84.7	75.3	66.7	60.3	53.9	60.3
62.5°	44.4	46.7	49.0	56.2	65.0	65.6	57.9	51.5	49.2	46.9	49.2
65°	38.5	39.7	41.0	42.0	42.8	43.1	42.6	42.2	41.8	41.3	41.8
67.5°	33.7	34.6	35.5	36.0	36.4	36.8	37.2	37.3	36.4	35.6	36.4
70°	29.8	31.1	32.4	32.7	32.7	32.9	33.3	33.4	32.6	31.7	32.6
72.5°	26.7	27.7	28.6	29.1	29.4	29.8	30.3	30.4	29.5	28.7	29.5
75°	22.1	22.5	23.0	23.4	23.8	24.3	24.7	24.9	24.5	24.0	24.5
77.5°	17.5	17.9	18.4	18.7	19.1	19.3	19.4	19.3	18.9	18.5	18.9
80°	14.4	14.9	15.3	15.4	15.4	15.6	16.0	16.2	15.8	15.4	15.8
82.5°	11.3	11.4	11.5	11.8	12.1	12.4	12.4	12.5	12.4	12.3	12.4
85°	6.7	6.7	6.7	6.7	6.7	6.9	7.4	7.6	7.2	6.7	7.2
87.5°	6.5	6.5	6.3	6.2	6.2	6.0	5.4	4.6	3.7	2.9	3.7
90°	21.2	21.2	20.2	19.2	19.2	18.3	15.4	11.5	6.7	2.9	6.7
92.5°	25.0	25.0	24.0	23.9	22.3	20.6	16.9	16.9	16.7	10.6	18.3
95°	22.1	22.1	22.1	22.1	26.0	32.7	48.1	49.1	32.7	29.8	42.3
97.5°	50.6	53.5	59.8	71.2	87.3	90.4	85.6	63.9	61.2	56.9	77.5
100°	102.9	105.8	110.6	125.0	136.6	113.5	89.4	88.5	82.7	80.8	102.9
102.5°	169.1	169.7	172.9	177.4	137.3	124.3	118.7	114.6	105.8	104.6	126.8
105°	225.1	218.3	187.6	168.3	169.3	169.3	165.4	157.7	141.4	140.4	165.4
107.5°	220.3	219.5	220.6	223.5	228.5	227.4	222.9	202.4	183.1	178.7	201.2
110°	262.6	262.6	264.5	267.4	269.3	267.4	260.6	234.7	211.6	204.9	225.1

TEST NUMBER: P709355

CATALOG NUMBER: DL2W-WB-M-075U-100D-930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	306.4	304.9	306.8	308.9	313.2	307.4	296.0	266.2	240.1	230.3	250.5
115°	373.2	373.2	374.1	374.1	375.1	372.2	349.1	318.4	283.7	269.3	286.6
117.5°	441.1	439.2	440.3	441.5	437.6	429.9	403.2	367.4	328.5	305.5	319.1
120°	481.9	483.8	481.9	483.8	479.9	468.4	442.4	402.0	357.8	330.9	341.4
122.5°	524.2	525.3	524.9	524.6	519.9	506.9	476.3	434.3	390.9	357.8	362.2
125°	591.5	586.7	584.8	583.8	580.0	564.6	532.8	489.6	438.6	398.2	392.4
127.5°	647.9	645.8	641.7	639.6	633.6	615.0	582.5	540.7	484.7	439.0	426.1
130°	684.8	685.8	681.0	678.1	667.5	647.3	615.5	576.1	519.4	467.4	449.2
132.5°	721.7	720.4	718.7	710.4	701.3	679.6	650.2	609.2	551.7	497.4	472.2
135°	774.2	771.4	766.6	758.9	747.3	726.2	698.3	657.9	600.2	541.5	506.9
137.5°	816.0	813.7	808.7	800.6	787.5	769.2	741.2	705.2	649.8	587.8	544.2
140°	840.6	840.6	834.8	825.2	813.7	795.4	770.4	732.9	679.0	619.4	570.3
142.5°	862.9	862.9	856.4	849.1	836.8	820.0	798.1	760.6	708.3	649.4	597.3
145°	892.5	892.5	888.7	882.9	869.5	854.1	835.8	798.3	750.2	691.5	639.6
147.5°	918.7	920.8	916.0	911.4	900.8	882.7	867.3	831.4	787.5	735.6	682.3
150°	934.9	937.8	932.9	929.1	918.5	901.2	885.8	852.2	809.8	761.7	710.8
152.5°	950.3	952.4	949.1	945.3	933.1	915.8	902.7	871.4	832.9	787.1	735.4
155°	969.5	974.3	970.5	965.6	954.1	937.8	926.2	897.4	861.8	821.4	777.1
157.5°	989.1	991.2	987.4	981.4	970.6	956.6	944.3	917.7	886.8	852.0	813.3
160°	998.3	1001.2	997.4	990.7	979.1	966.6	955.1	930.1	902.2	870.4	834.8
162.5°	1004.5	1008.2	1004.3	998.3	984.5	973.5	963.5	940.8	914.5	885.8	854.1
165°	1010.8	1014.7	1011.8	1005.1	990.7	982.0	973.3	954.1	931.0	907.9	881.0
167.5°	1011.2	1016.0	1012.4	1006.8	992.4	983.9	977.6	961.0	942.4	924.7	903.7
170°	1008.9	1013.7	1010.8	1006.0	991.6	983.9	979.1	965.6	949.3	933.9	917.6
172.5°	1003.5	1007.6	1005.5	1000.7	987.0	980.8	978.3	966.4	953.1	941.6	927.6
175°	989.7	995.5	991.6	987.8	976.2	972.4	973.3	965.6	956.0	949.3	940.6
177.5°	969.1	972.2	971.4	969.1	960.6	960.6	963.7	959.1	956.0	952.9	949.1
180°	952.2	952.2	952.2	952.2	952.2	952.2	952.2	952.2	952.2	952.2	952.2

TEST NUMBER: P709355

CATALOG NUMBER: DL2W-WB-M-075U-100D-930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°
0°	2657.0	2657.0	2657.0	2657.0	2657.0	2657.0	2657.0	2657.0
2.5°	2664.6	2657.5	2648.9	2649.5	2659.0	2665.2	2661.1	2657.0
5°	2669.3	2661.5	2652.1	2653.6	2665.9	2674.1	2669.4	2664.7
7.5°	2676.4	2668.0	2656.8	2656.7	2667.6	2674.5	2669.3	2664.1
10°	2680.4	2671.1	2657.8	2656.3	2666.6	2673.3	2669.5	2665.6
12.5°	2684.6	2673.1	2656.5	2651.9	2659.4	2663.6	2657.7	2651.8
15°	2687.5	2671.7	2647.8	2635.6	2635.2	2632.7	2624.2	2615.6
17.5°	2667.2	2645.6	2613.2	2592.1	2582.5	2572.7	2562.6	2552.5
20°	2638.1	2612.7	2575.6	2549.9	2535.8	2522.5	2511.3	2500.2
22.5°	2589.5	2561.5	2520.5	2492.5	2477.3	2464.0	2456.0	2447.9
25°	2491.6	2463.7	2423.9	2397.0	2382.9	2370.7	2364.3	2357.9
27.5°	2360.0	2334.7	2300.2	2274.7	2258.4	2243.4	2232.5	2221.5
30°	2259.3	2235.5	2203.0	2177.5	2159.2	2140.7	2121.9	2103.1
32.5°	2133.0	2113.7	2089.0	2066.7	2046.6	2026.7	2007.2	1987.7
35°	1913.7	1899.2	1882.5	1865.9	1849.2	1834.4	1825.0	1815.5
37.5°	1659.1	1649.4	1637.2	1621.1	1601.1	1583.3	1572.0	1560.7
40°	1479.2	1465.8	1445.8	1428.4	1413.9	1399.6	1385.9	1372.2
42.5°	1287.5	1278.4	1260.7	1241.5	1220.8	1202.4	1190.8	1179.1
45°	959.6	968.4	964.5	953.0	933.7	903.7	841.3	778.9
47.5°	599.1	638.6	671.7	656.1	591.5	527.2	463.3	399.5
50°	389.0	438.8	491.8	475.8	390.7	321.5	299.7	277.9
52.5°	260.5	305.0	356.9	349.3	282.0	228.6	216.7	204.8
55°	145.2	168.6	197.2	196.0	164.8	140.1	134.9	129.8
57.5°	93.3	103.5	114.6	114.6	103.4	93.0	84.9	76.7
60°	66.7	75.3	84.7	83.7	72.1	61.9	55.5	49.0
62.5°	51.5	57.9	65.6	65.0	56.2	49.0	46.7	44.4
65°	42.2	42.6	43.1	42.8	42.0	41.0	39.7	38.5
67.5°	37.3	37.2	36.8	36.4	36.0	35.5	34.6	33.7
70°	33.4	33.3	32.9	32.7	32.7	32.4	31.1	29.8
72.5°	30.4	30.3	29.8	29.4	29.1	28.6	27.7	26.7
75°	24.9	24.7	24.3	23.8	23.4	23.0	22.5	22.1
77.5°	19.3	19.4	19.3	19.1	18.7	18.4	17.9	17.5
80°	16.2	16.0	15.6	15.4	15.4	15.3	14.9	14.4
82.5°	12.5	12.4	12.4	12.1	11.8	11.5	11.4	11.3
85°	7.6	7.4	6.9	6.7	6.7	6.7	6.7	6.7
87.5°	4.4	5.8	6.7	8.1	9.4	10.2	11.0	10.6
90°	10.6	17.3	22.1	28.9	35.6	39.4	43.3	41.4
92.5°	26.0	37.3	44.4	55.8	64.1	71.0	74.1	73.7
95°	59.6	75.0	89.4	102.9	116.4	126.0	131.8	129.8
97.5°	94.6	119.5	137.9	156.0	171.0	180.0	185.8	189.7
100°	119.3	143.3	170.2	187.6	204.9	215.4	225.1	228.9
102.5°	149.3	169.5	196.4	219.1	237.9	249.3	257.4	261.2
105°	191.4	216.4	239.5	263.5	283.7	298.2	306.8	309.7
107.5°	232.4	259.9	282.6	307.4	326.0	342.0	352.6	358.8
110°	257.8	287.6	316.4	336.6	356.8	371.3	381.8	385.7

TEST NUMBER: P709355

CATALOG NUMBER: DL2W-WB-M-075U-100D-930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°
112.5°	283.9	314.5	344.9	367.4	387.6	402.0	414.1	419.5
115°	317.4	351.1	384.7	414.5	432.8	446.3	454.9	459.7
117.5°	351.6	386.3	417.8	449.0	469.0	479.4	483.4	486.9
120°	373.2	407.8	438.6	467.4	490.5	504.0	508.8	510.7
122.5°	391.6	425.5	457.8	485.1	507.4	524.0	531.9	533.8
125°	417.4	452.0	484.7	510.7	533.8	550.1	558.8	563.6
127.5°	441.8	473.6	508.2	536.3	557.5	572.3	580.7	584.6
130°	458.8	486.7	521.3	550.1	571.3	587.7	595.4	599.2
132.5°	476.5	498.2	531.3	561.7	583.6	598.4	606.9	610.7
135°	503.0	515.5	543.4	575.2	598.2	612.7	620.4	624.2
137.5°	531.3	536.1	554.0	582.8	606.9	622.1	629.0	631.5
140°	552.1	549.2	561.7	586.7	610.7	625.2	632.9	633.8
142.5°	573.6	566.9	571.7	591.3	612.3	626.7	634.4	636.1
145°	608.8	594.4	589.6	601.1	615.5	629.0	635.7	637.7
147.5°	644.2	625.6	612.1	615.7	623.2	632.1	638.6	640.0
150°	670.4	646.3	629.0	628.1	630.9	636.7	642.5	641.5
152.5°	695.0	670.2	648.3	642.7	642.5	645.2	647.9	647.7
155°	734.8	706.9	681.0	670.4	664.6	662.7	662.7	661.7
157.5°	772.9	744.4	716.9	702.1	693.5	688.8	687.5	685.4
160°	798.3	767.5	741.5	725.2	716.5	708.8	706.0	703.1
162.5°	822.1	793.7	764.6	749.0	739.6	732.7	729.8	725.4
165°	855.0	832.0	802.1	785.8	775.2	769.4	765.6	761.7
167.5°	883.3	864.1	839.6	821.8	814.8	808.3	804.6	797.7
170°	900.2	884.9	862.7	846.4	842.5	836.8	830.0	822.3
172.5°	914.9	902.5	882.7	871.8	867.9	862.2	860.0	853.9
175°	932.9	926.2	911.8	903.1	903.1	902.2	899.3	893.5
177.5°	946.8	944.5	936.0	931.4	934.5	934.5	933.7	928.3
180°	952.2	952.2	952.2	952.2	952.2	952.2	952.2	952.2

(END OF REPORT)