

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P709338

Luminaire Tested: DL2W-WB-M-050U-050D-935-UNV-STD-W-WM-4

Issue Date: 3/5/2020

**Test Information**

Test Method: LM-79-2019  
Report Number: P709338  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2303-941-2, G3-2104-222-5)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/5/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: DL2W-WB-M-050U-050D-935-UNV-STD-W-WM-4  
Description: CORELITE DISCREET DL2W WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 500 LUMENS PER FOOT  
UPLIGHT 500 LUMENS PER FOOT  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4097.6 lumens  
Efficiency: N/A  
Efficacy: 124.2 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.23 / 1.17  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 33  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P709338

CATALOG NUMBER: DL2W-WB-M-050U-050D-935-UNV-STD-W-WM-4

### Luminous Intensity Polar Plot

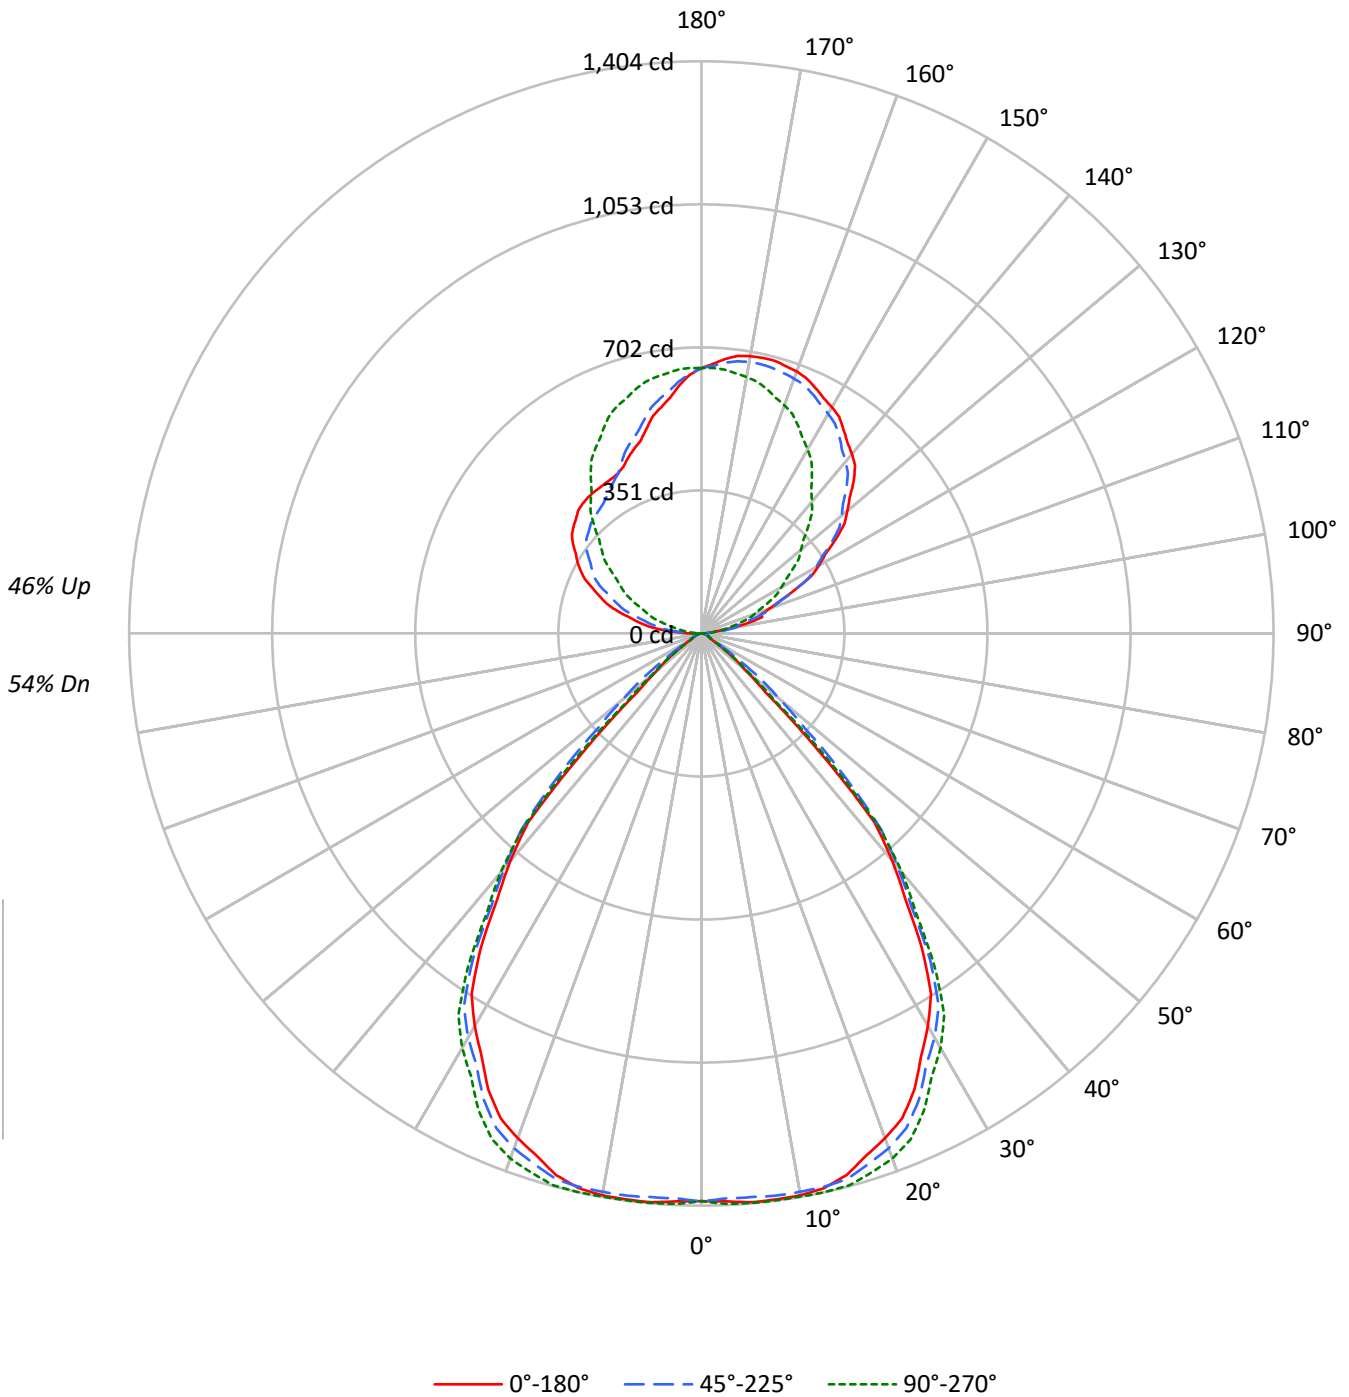

TEST NUMBER: P709338

CATALOG NUMBER: DL2W-WB-M-050U-050D-935-UNV-STD-W-WM-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59	54
1	100	97	94	91	93	90	87	85	78	76	74	66	65	64	55	55	54	49
2	93	87	82	78	86	81	77	73	70	67	65	60	58	56	51	50	49	44
3	86	78	72	67	80	73	68	64	64	60	57	55	53	50	47	45	44	40
4	80	71	64	59	75	67	61	56	58	54	50	51	48	45	44	41	40	36
5	74	64	57	52	69	60	54	50	53	49	45	47	43	40	41	38	36	33
6	69	59	51	46	65	55	49	44	49	44	40	43	39	36	38	35	33	30
7	65	54	46	41	60	51	44	40	45	40	36	40	36	33	35	32	30	27
8	60	49	42	37	56	47	40	36	42	37	33	37	33	30	32	30	27	25
9	56	45	38	34	53	43	37	33	38	34	30	34	30	28	30	27	25	23
10	53	42	35	31	50	40	34	30	36	31	27	32	28	25	28	25	23	21

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°	135°	180°
0°	22491	22491	22491	22491	22491
5°	22707	22503	22739	22503	22707
10°	22953	22810	23002	22810	22953
15°	23000	23156	23435	23156	23000
20°	22646	23097	23557	23097	22646
25°	22019	22502	23017	22502	22019
30°	20732	21333	21888	21333	20732
35°	18607	19295	19671	19295	18607
40°	15365	15823	16166	15823	15365
45°	9225	11424	10229	11424	9225
50°	3642	6300	3969	6300	3642
55°	1942	2859	1914	2859	1942
60°	840	1426	904	1426	840
65°	764	867	802	867	764
70°	755	807	803	807	755
75°	686	805	749	805	686
80°	651	744	744	744	651
85°	556	741	741	741	556

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 60°  
 Vertical Angle: 45°  
 Luminance: 11501 cd/sqm

TEST NUMBER: P709338

CATALOG NUMBER: DL2W-WB-M-050U-050D-935-UNV-STD-W-WM-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	133.4	3.3
10°-20°	391.4	9.6
20°-30°	579.5	14.1
30°-40°	600.3	14.7
40°-50°	360.8	8.8
50°-60°	86.2	2.1
60°-70°	23.5	0.6
70°-80°	13.1	0.3
80°-90°	6.9	0.2
90°-100°	52.0	1.3
100°-110°	151.3	3.7
110°-120°	246.7	6.0
120°-130°	313.2	7.6
130°-140°	335.0	8.2
140°-150°	312.8	7.6
150°-160°	257.5	6.3
160°-170°	172.7	4.2
170°-180°	61.3	1.5
0°-30°	1104.3	27.0
0°-40°	1704.6	41.6
0°-60°	2151.6	52.5
0°-90°	2195.1	53.6
90°-120°	450.0	11.0
90°-150°	1410.9	34.4
90°-180°	1903.0	46.4
0°-180°	4097.6	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	1393	1393	1393	1393	1393	
5°	1401	1388	1403	1388	1401	134
15°	1376	1385	1402	1385	1376	387
25°	1236	1263	1292	1263	1236	565
35°	944	979	998	979	944	582
45°	404	500	448	500	404	318
55°	69	102	68	102	69	67
65°	20	23	21	23	20	20
75°	11	13	12	13	11	12
85°	3	4	4	4	3	4
90°	14	13	2	18	30	7
95°	15	20	20	67	91	26
105°	155	116	95	172	213	144
115°	253	255	183	274	315	252
125°	402	390	273	341	385	359
135°	529	503	371	383	427	406
145°	609	590	473	406	436	382
155°	664	648	562	463	452	306
165°	693	674	621	542	520	196
175°	676	667	650	622	612	65
180°	651	651	651	651	651	

TEST NUMBER: P709338

CATALOG NUMBER: DL2W-WB-M-050U-050D-935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1393.0	1393.0	1393.0	1393.0	1393.0	1393.0	1393.0	1393.0	1393.0	1393.0	1393.0
2.5°	1394.6	1396.0	1397.4	1393.5	1387.8	1387.5	1392.5	1396.7	1398.9	1401.0	1398.9
5°	1401.0	1401.9	1402.8	1397.0	1389.0	1387.9	1393.7	1398.6	1400.8	1403.0	1400.8
7.5°	1400.8	1402.1	1403.5	1398.8	1392.1	1391.2	1396.1	1400.2	1401.6	1403.0	1401.6
10°	1400.0	1401.3	1402.7	1398.0	1391.3	1391.3	1398.0	1403.0	1403.0	1403.0	1403.0
12.5°	1393.6	1395.6	1397.7	1394.5	1389.6	1391.8	1400.9	1407.4	1405.6	1403.8	1405.6
15°	1376.0	1379.1	1382.2	1382.7	1382.2	1388.4	1401.3	1410.0	1406.0	1402.0	1406.0
17.5°	1343.6	1347.9	1352.1	1355.8	1359.3	1369.9	1387.7	1399.4	1393.2	1387.0	1393.2
20°	1318.0	1321.6	1325.1	1331.0	1337.7	1350.8	1370.3	1383.4	1377.2	1371.0	1377.2
22.5°	1287.6	1291.5	1295.4	1301.1	1307.4	1321.1	1342.1	1356.2	1349.6	1343.0	1349.6
25°	1236.0	1239.6	1243.1	1249.3	1256.4	1269.8	1289.3	1302.7	1297.3	1292.0	1297.3
27.5°	1168.0	1171.9	1175.8	1181.8	1188.5	1200.2	1217.1	1229.2	1226.8	1224.4	1226.8
30°	1112.0	1117.3	1122.7	1130.3	1138.8	1149.7	1163.0	1173.1	1173.6	1174.0	1173.6
32.5°	1048.8	1055.9	1063.0	1070.9	1079.0	1089.1	1101.4	1110.4	1109.8	1109.2	1109.8
35°	944.0	951.6	959.1	967.0	975.0	982.8	990.3	996.2	997.1	998.0	997.1
37.5°	822.6	825.5	828.5	835.7	844.3	852.6	860.7	866.6	866.0	865.4	866.0
40°	729.0	729.4	729.9	737.0	746.3	755.2	763.7	769.7	768.3	767.0	768.3
42.5°	629.0	630.9	632.7	640.5	650.2	658.2	664.5	666.7	656.9	647.0	656.9
45°	404.0	436.9	469.8	486.3	497.4	503.2	503.7	497.8	472.9	448.0	472.9
47.5°	211.4	243.8	276.3	309.1	342.1	349.8	332.3	311.4	280.3	249.2	280.3
50°	145.0	156.1	167.2	203.0	247.0	254.6	225.7	198.9	178.4	158.0	178.4
52.5°	105.8	112.6	119.5	147.3	182.0	185.1	156.6	132.7	122.5	112.4	122.5
55°	69.0	70.8	72.6	85.0	101.0	102.1	88.3	76.9	72.4	68.0	72.4
57.5°	41.2	44.9	48.7	54.3	60.6	60.8	54.9	49.4	45.5	41.6	45.5
60°	26.0	28.7	31.3	37.0	43.7	44.6	39.7	35.1	31.6	28.0	31.6
62.5°	23.6	24.5	25.4	29.3	34.2	34.5	30.3	26.9	25.9	24.8	25.9
65°	20.0	20.4	20.9	21.7	22.6	22.8	22.3	21.9	21.4	21.0	21.4
67.5°	17.6	18.0	18.5	18.9	19.2	19.4	19.5	19.5	19.0	18.6	19.0
70°	16.0	16.4	16.9	17.0	17.0	17.2	17.7	17.9	17.4	17.0	17.4
72.5°	14.4	14.5	14.6	14.9	15.2	15.4	15.5	15.6	15.5	15.4	15.5
75°	11.0	11.4	11.9	12.3	12.8	13.0	13.0	12.9	12.4	12.0	12.4
77.5°	8.6	9.0	9.5	9.6	9.6	9.8	10.1	10.3	10.0	9.6	10.0
80°	7.0	7.4	7.9	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0
82.5°	5.4	5.8	6.3	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4
85°	3.0	3.4	3.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
87.5°	3.6	3.6	3.6	3.9	4.0	4.2	3.8	3.2	2.6	2.0	2.6
90°	14.0	14.0	14.0	14.0	13.0	13.0	11.0	8.0	5.0	2.0	5.0
92.5°	17.2	17.2	16.4	16.4	15.4	13.8	11.8	11.2	12.2	6.8	13.0
95°	15.0	15.0	15.0	15.0	17.0	23.0	32.0	34.0	23.0	20.0	28.0
97.5°	35.4	37.8	41.2	49.6	58.4	63.0	59.2	43.0	41.6	39.8	53.2
100°	73.0	73.0	78.0	84.0	96.0	79.0	60.0	59.0	56.0	55.0	70.0
102.5°	115.4	117.8	120.4	121.6	94.4	85.4	82.4	76.6	72.0	71.0	86.8
105°	155.0	148.0	127.0	115.0	115.0	117.0	115.0	108.0	98.0	95.0	112.0
107.5°	151.6	148.6	151.2	152.4	157.2	155.8	151.6	138.8	124.8	122.2	137.2
110°	178.0	179.0	180.0	182.0	186.0	183.0	178.0	162.0	144.0	139.0	154.0

TEST NUMBER: P709338

CATALOG NUMBER: DL2W-WB-M-050U-050D-935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	209.2	208.6	211.2	212.4	212.4	211.0	202.8	182.8	163.2	157.4	170.8
115°	253.0	255.0	256.0	257.0	256.0	254.0	239.0	217.0	193.0	183.0	195.0
117.5°	303.4	298.8	300.2	301.0	301.6	294.4	278.0	252.0	224.2	209.4	218.6
120°	333.0	330.0	329.0	329.0	328.0	320.0	302.0	276.0	245.0	227.0	233.0
122.5°	359.4	358.8	358.6	357.8	357.6	346.4	326.8	299.2	267.4	245.4	247.4
125°	402.0	403.0	400.0	396.0	395.0	385.0	364.0	335.0	301.0	273.0	270.0
127.5°	442.4	444.4	441.2	439.0	433.6	419.8	399.8	370.8	332.8	301.4	291.6
130°	468.0	470.0	466.0	463.0	456.0	443.0	423.0	394.0	356.0	319.0	306.0
132.5°	493.6	494.0	490.0	486.2	478.4	465.4	445.4	417.2	376.8	339.8	322.8
135°	529.0	530.0	525.0	520.0	508.0	498.0	479.0	451.0	410.0	371.0	348.0
137.5°	558.2	558.4	554.0	546.6	538.6	525.8	508.2	481.8	444.0	402.0	372.8
140°	575.0	576.0	570.0	565.0	557.0	545.0	529.0	501.0	464.0	422.0	392.0
142.5°	589.4	590.4	586.0	581.0	573.0	561.0	546.6	520.2	484.0	442.8	410.4
145°	609.0	612.0	608.0	603.0	596.0	585.0	570.0	546.0	513.0	473.0	437.0
147.5°	629.8	630.0	627.0	624.0	616.0	604.2	593.4	569.4	538.0	502.8	465.2
150°	641.0	642.0	639.0	636.0	628.0	617.0	607.0	583.0	554.0	522.0	486.0
152.5°	650.6	652.4	650.2	646.4	639.2	627.4	618.2	595.8	569.2	538.8	504.4
155°	664.0	667.0	665.0	661.0	653.0	642.0	633.0	614.0	589.0	562.0	531.0
157.5°	676.8	679.6	677.4	672.6	664.4	654.6	646.0	628.0	606.8	583.2	554.8
160°	684.0	686.0	683.0	679.0	670.0	661.0	654.0	636.0	618.0	596.0	570.0
162.5°	688.0	690.8	687.8	683.0	674.0	665.8	659.6	643.2	626.0	606.4	583.6
165°	693.0	694.0	692.0	688.0	678.0	671.0	666.0	653.0	637.0	621.0	603.0
167.5°	692.6	696.6	693.6	689.8	679.0	674.0	669.4	657.8	646.0	632.6	619.2
170°	691.0	695.0	692.0	689.0	679.0	674.0	671.0	661.0	650.0	639.0	628.0
172.5°	687.0	690.2	688.0	685.0	675.8	671.6	670.2	661.8	652.4	643.8	634.4
175°	676.0	680.0	679.0	676.0	668.0	666.0	667.0	661.0	655.0	650.0	643.0
177.5°	662.2	666.2	664.6	663.0	657.4	656.6	659.8	656.6	653.4	651.8	648.6
180°	651.0	651.0	651.0	651.0	651.0	651.0	651.0	651.0	651.0	651.0	651.0

TEST NUMBER: P709338

CATALOG NUMBER: DL2W-WB-M-050U-050D-935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°
0°	1393.0	1393.0	1393.0	1393.0	1393.0	1393.0	1393.0	1393.0
2.5°	1396.7	1392.5	1387.5	1387.8	1393.5	1397.4	1396.0	1394.6
5°	1398.6	1393.7	1387.9	1389.0	1397.0	1402.8	1401.9	1401.0
7.5°	1400.2	1396.1	1391.2	1392.1	1398.8	1403.5	1402.1	1400.8
10°	1403.0	1398.0	1391.3	1391.3	1398.0	1402.7	1401.3	1400.0
12.5°	1407.4	1400.9	1391.8	1389.6	1394.5	1397.7	1395.6	1393.6
15°	1410.0	1401.3	1388.4	1382.2	1382.7	1382.2	1379.1	1376.0
17.5°	1399.4	1387.7	1369.9	1359.3	1355.8	1352.1	1347.9	1343.6
20°	1383.4	1370.3	1350.8	1337.7	1331.0	1325.1	1321.6	1318.0
22.5°	1356.2	1342.1	1321.1	1307.4	1301.1	1295.4	1291.5	1287.6
25°	1302.7	1289.3	1269.8	1256.4	1249.3	1243.1	1239.6	1236.0
27.5°	1229.2	1217.1	1200.2	1188.5	1181.8	1175.8	1171.9	1168.0
30°	1173.1	1163.0	1149.7	1138.8	1130.3	1122.7	1117.3	1112.0
32.5°	1110.4	1101.4	1089.1	1079.0	1070.9	1063.0	1055.9	1048.8
35°	996.2	990.3	982.8	975.0	967.0	959.1	951.6	944.0
37.5°	866.6	860.7	852.6	844.3	835.7	828.5	825.5	822.6
40°	769.7	763.7	755.2	746.3	737.0	729.9	729.4	729.0
42.5°	666.7	664.5	658.2	650.2	640.5	632.7	630.9	629.0
45°	497.8	503.7	503.2	497.4	486.3	469.8	436.9	404.0
47.5°	311.4	332.3	349.8	342.1	309.1	276.3	243.8	211.4
50°	198.9	225.7	254.6	247.0	203.0	167.2	156.1	145.0
52.5°	132.7	156.6	185.1	182.0	147.3	119.5	112.6	105.8
55°	76.9	88.3	102.1	101.0	85.0	72.6	70.8	69.0
57.5°	49.4	54.9	60.8	60.6	54.3	48.7	44.9	41.2
60°	35.1	39.7	44.6	43.7	37.0	31.3	28.7	26.0
62.5°	26.9	30.3	34.5	34.2	29.3	25.4	24.5	23.6
65°	21.9	22.3	22.8	22.6	21.7	20.9	20.4	20.0
67.5°	19.5	19.5	19.4	19.2	18.9	18.5	18.0	17.6
70°	17.9	17.7	17.2	17.0	17.0	16.9	16.4	16.0
72.5°	15.6	15.5	15.4	15.2	14.9	14.6	14.5	14.4
75°	12.9	13.0	13.0	12.8	12.3	11.9	11.4	11.0
77.5°	10.3	10.1	9.8	9.6	9.6	9.5	9.0	8.6
80°	8.0	8.0	8.0	8.0	8.0	7.9	7.4	7.0
82.5°	6.4	6.4	6.4	6.4	6.4	6.3	5.8	5.4
85°	4.0	4.0	4.0	4.0	4.0	3.9	3.4	3.0
87.5°	3.0	3.8	4.8	5.6	6.1	6.2	6.6	6.8
90°	7.0	11.0	16.0	21.0	25.0	27.0	29.0	30.0
92.5°	18.2	24.6	32.0	37.8	44.2	48.6	50.6	50.8
95°	42.0	51.0	62.0	72.0	80.0	86.0	90.0	91.0
97.5°	64.6	81.4	93.6	105.2	116.8	124.0	128.6	129.2
100°	83.0	99.0	116.0	126.0	140.0	148.0	151.0	154.0
102.5°	103.0	116.6	135.2	150.0	163.2	170.4	176.6	179.6
105°	131.0	148.0	164.0	181.0	196.0	204.0	210.0	213.0
107.5°	157.6	178.4	194.4	211.0	224.2	234.0	241.2	244.2
110°	176.0	196.0	216.0	231.0	245.0	254.0	262.0	265.0



TEST NUMBER: P709338

CATALOG NUMBER: DL2W-WB-M-050U-050D-935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°
112.5°	193.6	214.4	236.0	252.6	265.8	277.2	282.8	288.2
115°	218.0	241.0	263.0	284.0	298.0	306.0	311.0	315.0
117.5°	239.6	262.8	285.4	306.4	320.8	327.4	330.4	334.2
120°	254.0	278.0	299.0	320.0	336.0	345.0	348.0	351.0
122.5°	267.6	290.8	312.6	332.8	348.8	358.6	363.2	365.4
125°	286.0	309.0	331.0	351.0	365.0	377.0	383.0	385.0
127.5°	301.2	324.2	347.4	366.6	381.4	391.4	397.4	400.2
130°	314.0	333.0	357.0	377.0	391.0	401.0	407.0	409.0
132.5°	325.2	341.0	363.4	384.2	399.0	409.8	414.2	417.0
135°	345.0	353.0	372.0	394.0	410.0	419.0	424.0	427.0
137.5°	364.2	366.4	378.4	398.6	414.6	424.6	429.6	431.6
140°	377.0	376.0	384.0	401.0	417.0	427.0	432.0	434.0
142.5°	391.4	388.0	392.0	404.2	418.6	428.6	434.4	435.6
145°	415.0	406.0	403.0	410.0	421.0	430.0	435.0	436.0
147.5°	441.4	427.6	419.0	420.2	426.4	432.8	436.6	437.4
150°	459.0	442.0	431.0	429.0	432.0	436.0	439.0	439.0
152.5°	475.0	458.8	443.8	440.2	439.2	441.6	443.8	443.0
155°	503.0	483.0	466.0	460.0	455.0	454.0	453.0	452.0
157.5°	531.0	509.2	490.0	481.0	475.6	472.4	470.2	467.6
160°	547.0	526.0	506.0	497.0	490.0	486.0	483.0	482.0
162.5°	562.2	543.6	524.4	512.2	506.0	500.4	499.0	495.6
165°	584.0	569.0	548.0	536.0	531.0	527.0	524.0	520.0
167.5°	605.6	591.6	574.0	562.4	556.8	552.8	549.4	547.2
170°	616.0	606.0	590.0	580.0	576.0	572.0	567.0	564.0
172.5°	626.4	618.0	605.2	596.0	594.4	589.6	587.8	584.0
175°	639.0	634.0	624.0	619.0	619.0	617.0	617.0	612.0
177.5°	647.8	646.2	639.8	636.6	639.0	639.0	638.2	635.8
180°	651.0	651.0	651.0	651.0	651.0	651.0	651.0	651.0

(END OF REPORT)