

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: FAIL-SAFE

Report Number: P1356928

Luminaire Tested: 2ASL4-35VHE-3-40-UNV

Issue Date: 2/17/2026

Test Information

Test Method: LM-79-2019
Report Number: P1356928
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2511-597-12)
Test Lab: INNOVATION CENTER
Issue Date: 2/17/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: FAIL-SAFE
Catalog Number: 2ASL4-35VHE-3-40-UNV
Description: 2FT 3500 LUMEN PER FOOT 4ASL LED LUMINAIRE WITH OPL LENS AND 4000K LEDS 3 ROW
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7138.0 lumens
Efficiency: N/A
Efficacy: 112.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.3 / 1.39
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 1.98' x H: 0.1')
CIE Type: Direct

Input Watts (W): 63.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1356928
CATALOG NUMBER: 2ASL4-35VHE-3-40-UNV

Luminous Intensity Polar Plot

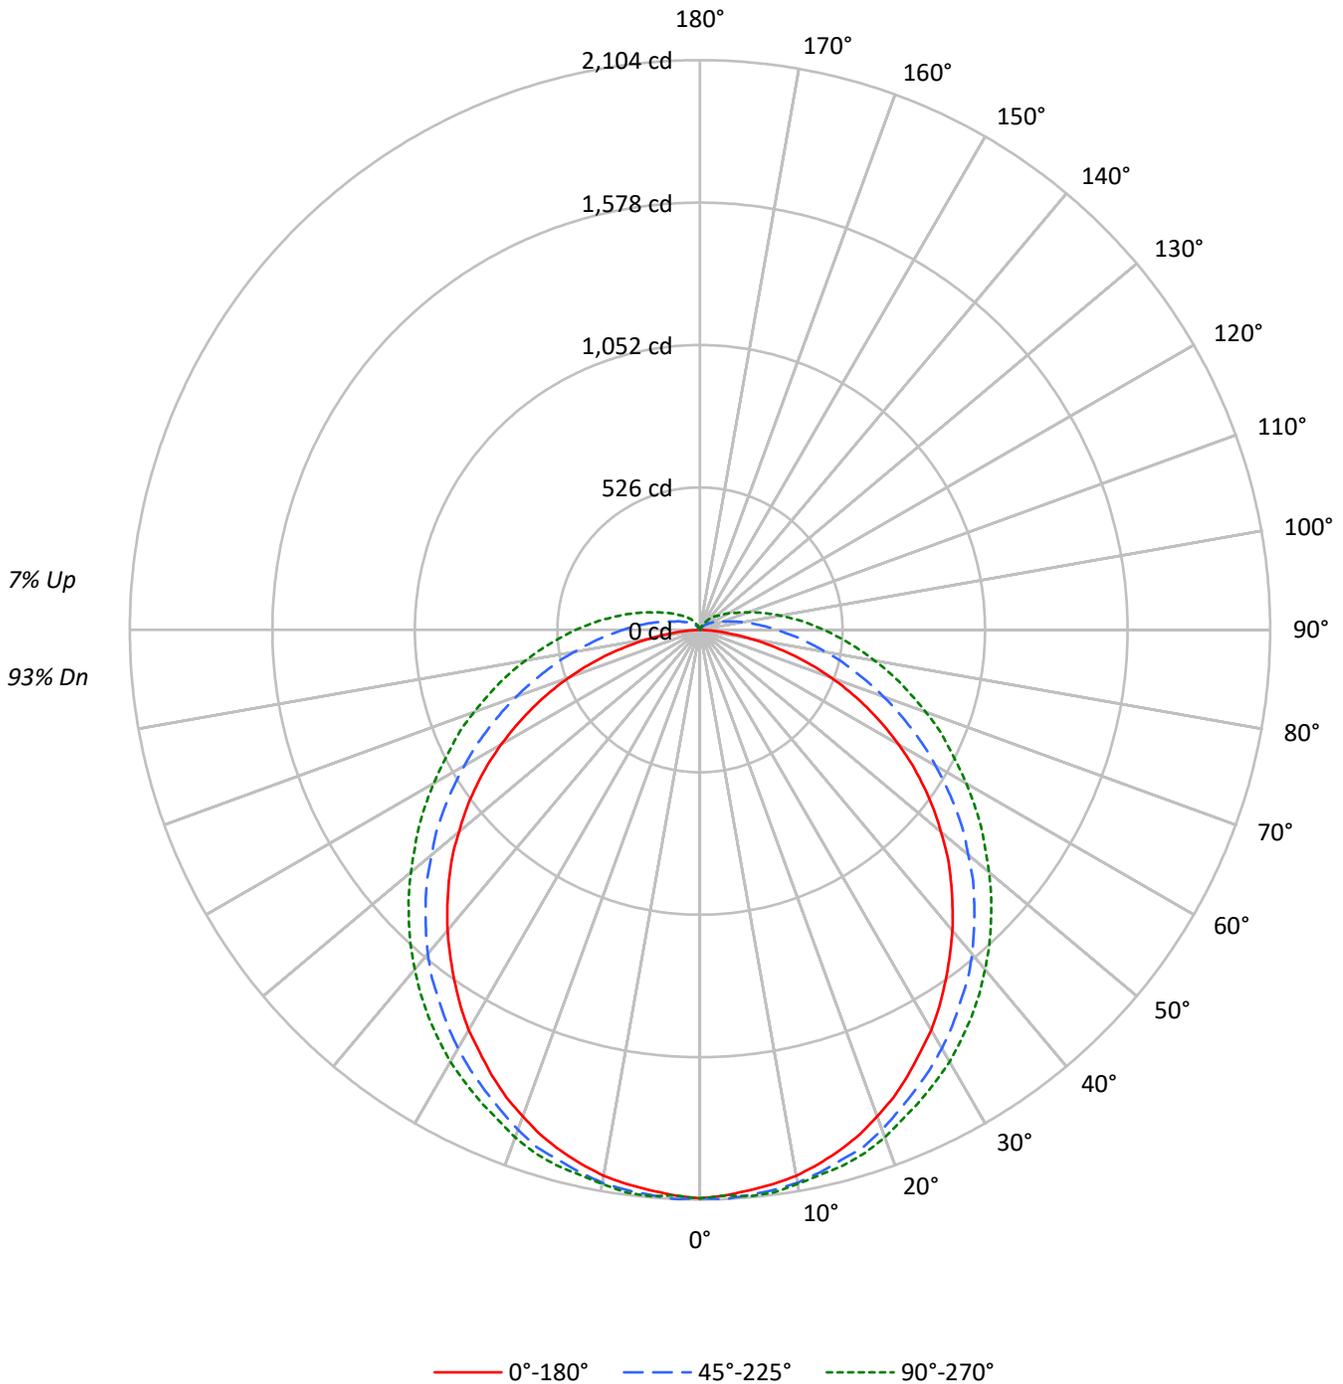



TEST NUMBER: P1356928
 CATALOG NUMBER: 2ASL4-35VHE-3-40-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	117	117	117	117	114	114	114	114	107	107	107	101	101	101	96	96	96	96	96	96	93
1	105	100	95	91	102	97	92	88	91	88	84	86	83	80	81	79	77	77	77	77	74
2	95	86	79	72	92	84	77	71	79	73	68	75	70	66	71	67	63	63	63	63	61
3	86	75	67	60	83	73	65	59	69	62	57	65	60	55	62	57	53	53	53	53	50
4	79	66	57	50	76	65	56	49	61	54	48	58	52	47	55	50	45	45	45	45	43
5	73	59	50	43	70	58	49	42	55	47	41	52	45	40	49	44	39	39	39	39	37
6	67	53	44	37	64	52	43	37	49	42	36	47	40	35	45	39	34	34	34	34	32
7	62	48	39	33	60	47	38	32	45	37	32	43	36	31	41	35	30	30	30	30	28
8	58	44	35	29	56	43	35	29	41	34	28	39	32	28	37	32	27	27	27	27	25
9	54	40	32	26	52	39	31	26	38	30	25	36	30	25	35	29	24	24	24	24	22
10	50	37	29	24	49	36	29	23	35	28	23	33	27	23	32	26	22	22	22	22	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	34254	34254	34254
5°	33872	33555	33470
10°	33602	32852	32623
15°	33152	31995	31905
20°	32569	31173	31096
25°	31904	30157	30175
30°	31204	29268	29397
35°	30352	28272	28530
40°	29559	27354	27618
45°	28703	26254	26703
50°	27730	25076	25751
55°	26674	23948	24894
60°	25321	22636	24026
65°	23621	21365	23305
70°	21464	20099	22741
75°	18399	18916	22355
80°	13893	17974	22189
85°	7656	17578	22516

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 28703 cd/sqm



TEST NUMBER: P1356928
 CATALOG NUMBER: 2ASL4-35VHE-3-40-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	199.1	2.8
10°-20°	571.6	8.0
20°-30°	864.2	12.1
30°-40°	1046.4	14.7
40°-50°	1099.0	15.4
50°-60°	1025.4	14.4
60°-70°	847.4	11.9
70°-80°	610.1	8.5
80°-90°	379.1	5.3
90°-100°	222.2	3.1
100°-110°	127.1	1.8
110°-120°	71.8	1.0
120°-130°	41.3	0.6
130°-140°	22.3	0.3
140°-150°	9.4	0.1
150°-160°	1.7	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1634.9	22.9
0°-40°	2681.3	37.6
0°-60°	4805.7	67.3
0°-90°	6642.4	93.1
90°-120°	421.0	5.9
90°-150°	493.9	6.9
90°-180°	496.0	6.9
0°-180°	7138.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2099	2099	2099	2099	2099	
5°	2078	2095	2095	2095	2099	197
15°	1990	2016	2025	2038	2047	561
25°	1816	1846	1877	1903	1920	836
35°	1580	1624	1676	1724	1746	989
45°	1309	1357	1432	1493	1519	1010
55°	1008	1065	1152	1235	1266	901
65°	681	746	860	969	1008	674
75°	349	436	589	716	768	369
85°	66	196	371	502	550	80
90°	0	118	284	406	458	3
95°	0	74	214	327	375	0
105°	0	26	118	205	240	0
115°	0	13	70	127	148	0
125°	0	9	44	83	96	0
135°	0	0	26	52	66	0
145°	0	0	13	31	35	0
155°	0	0	0	9	13	0
165°	0	0	0	0	0	0
175°	0	0	0	0	0	0
180°	0	0	0	0	0	0



TEST NUMBER: P1356928

CATALOG NUMBER: 2ASL4-35VHE-3-40-UNV

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2099.4	2099.4	2099.4	2099.4	2099.4
2.5°	2090.7	2103.7	2103.7	2090.7	2090.7
5°	2077.6	2095.0	2095.0	2095.0	2099.4
7.5°	2064.5	2086.3	2086.3	2086.3	2095.0
10°	2047.0	2068.8	2073.2	2073.2	2077.6
12.5°	2020.8	2047.0	2051.4	2055.7	2060.1
15°	1990.3	2016.5	2025.2	2038.3	2047.0
17.5°	1955.3	1985.9	2003.4	2016.5	2025.2
20°	1911.7	1942.3	1964.1	1981.5	1994.6
22.5°	1868.1	1894.2	1920.4	1942.3	1955.3
25°	1815.7	1846.2	1876.8	1903.0	1920.4
27.5°	1758.9	1793.9	1833.1	1863.7	1881.2
30°	1706.6	1741.5	1785.1	1824.4	1841.9
32.5°	1645.5	1684.7	1732.8	1772.0	1793.9
35°	1580.0	1623.6	1676.0	1724.0	1745.8
37.5°	1514.5	1558.2	1623.6	1671.6	1693.5
40°	1449.1	1492.7	1562.5	1614.9	1636.7
42.5°	1379.2	1422.9	1497.1	1553.8	1580.0
45°	1309.4	1357.4	1431.6	1492.7	1518.9
47.5°	1239.6	1287.6	1366.1	1431.6	1457.8
50°	1161.0	1213.4	1291.9	1366.1	1392.3
52.5°	1086.8	1139.2	1226.5	1300.7	1326.8
55°	1008.2	1065.0	1152.3	1235.2	1265.7
57.5°	929.7	986.4	1078.1	1165.4	1200.3
60°	846.7	907.8	1003.9	1095.5	1134.8
62.5°	763.8	829.3	934.0	1030.1	1069.3
65°	680.9	746.3	859.8	968.9	1008.2
67.5°	598.0	667.8	790.0	903.5	951.5
70°	515.0	589.2	720.2	838.0	886.0
72.5°	432.1	510.7	654.7	776.9	824.9
75°	349.2	436.5	589.2	715.8	768.2
77.5°	266.2	366.6	532.5	659.1	711.4
80°	192.0	305.5	471.4	602.3	654.7
82.5°	122.2	244.4	419.0	549.9	602.3
85°	65.5	196.4	371.0	501.9	549.9
87.5°	21.8	152.8	323.0	453.9	501.9
90°	0.0	117.8	283.7	405.9	458.3
92.5°	0.0	91.7	248.8	366.6	414.6
95°	0.0	74.2	213.9	327.3	375.4
97.5°	0.0	61.1	187.7	292.4	336.1
100°	0.0	48.0	161.5	261.9	301.2
102.5°	0.0	39.3	139.7	231.3	270.6
105°	0.0	26.2	117.8	205.1	240.1
107.5°	0.0	21.8	100.4	183.3	213.9
110°	0.0	17.5	91.7	157.1	187.7



TEST NUMBER: P1356928

CATALOG NUMBER: 2ASL4-35VHE-3-40-UNV

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	0.0	13.1	82.9	139.7	170.2
115°	0.0	13.1	69.8	126.6	148.4
117.5°	0.0	13.1	61.1	113.5	135.3
120°	0.0	8.7	56.7	100.4	122.2
122.5°	0.0	8.7	48.0	91.7	109.1
125°	0.0	8.7	43.6	82.9	96.0
127.5°	0.0	4.4	39.3	74.2	87.3
130°	0.0	4.4	34.9	65.5	78.6
132.5°	0.0	4.4	30.6	61.1	74.2
135°	0.0	0.0	26.2	52.4	65.5
137.5°	0.0	0.0	21.8	48.0	56.7
140°	0.0	0.0	17.5	39.3	52.4
142.5°	0.0	0.0	13.1	34.9	43.6
145°	0.0	0.0	13.1	30.6	34.9
147.5°	0.0	0.0	8.7	21.8	30.6
150°	0.0	0.0	4.4	17.5	21.8
152.5°	0.0	0.0	0.0	13.1	17.5
155°	0.0	0.0	0.0	8.7	13.1
157.5°	0.0	0.0	0.0	0.0	4.4
160°	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1356928
 CATALOG NUMBER: 2ASL4-35VHE-3-40-UNV

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	21.58	23.12	22.05	23.57	24.06	23.52	25.06	23.99	25.52	26.00
	3H	23.08	24.48	23.56	24.95	25.47	25.95	27.35	26.43	27.82	28.34
	4H	23.56	24.89	24.06	25.37	25.91	27.12	28.45	27.62	28.93	29.47
	6H	23.84	25.08	24.35	25.57	26.13	28.32	29.56	28.84	30.06	30.61
	8H	23.89	25.08	24.42	25.60	26.16	28.93	30.12	29.46	30.64	31.20
	12H	23.90	25.04	24.44	25.56	26.15	29.58	30.72	30.11	31.23	31.82
4H	2H	22.44	23.77	22.94	24.25	24.79	23.96	25.29	24.46	25.78	26.31
	3H	24.18	25.31	24.69	25.84	26.40	26.61	27.75	27.13	28.27	28.84
	4H	24.78	25.82	25.32	26.36	26.95	27.95	28.99	28.49	29.53	30.12
	6H	25.18	26.10	25.74	26.66	27.27	29.35	30.27	29.90	30.83	31.44
	8H	25.28	26.14	25.84	26.70	27.32	30.06	30.93	30.62	31.49	32.11
	12H	25.32	26.10	25.90	26.69	27.32	30.84	31.62	31.42	32.21	32.84
8H	4H	25.44	26.31	26.00	26.87	27.49	28.17	29.04	28.73	29.60	30.22
	6H	26.02	26.75	26.61	27.36	27.98	29.74	30.47	30.33	31.08	31.70
	8H	26.20	26.86	26.81	27.48	28.12	30.60	31.26	31.20	31.87	32.51
	12H	26.32	26.91	26.93	27.51	28.22	31.56	32.15	32.16	32.75	33.45
12H	4H	25.63	26.41	26.21	27.00	27.63	28.18	28.97	28.76	29.56	30.18
	6H	26.30	26.97	26.91	27.58	28.22	29.78	30.44	30.38	31.06	31.69
	8H	26.58	27.17	27.19	27.78	28.48	30.71	31.29	31.31	31.90	32.60

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Fail-Safe

Report Number: SP1-2511-597-4

Test Date: 11/18/2025

Luminaire Tested: 4ASL-2-40-UNV-OPL-1_600mA

Data in this report applies to families of products including 4ASL

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2511-597-4
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 11/18/2025
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Fail-Safe
 Catalog Number: **4ASL-2-40-UNV-OPL-1_600mA**
 Description: 2foot 4ASL LED LUMINAIRE WITH OPL LENS AND 4000K LEDs with 1 rows at 600mA

Spectral Parameters

CCT (K): 4015
 CIE u': 0.2259
 CIE v': 0.4990
 Duv: -0.0019
 CIE x: 0.3785
 CIE y: 0.3715
 CIE z: 0.2500
 Peak Wavelength (nm): 630
 Dominant Wavelength (nm): 580
 Purity: 25.06827
 R_f: 90.7
 R_g: 100.2

CRI (Ra): 93.9
 R1: 95.7
 R2: 96.3
 R3: 94.8
 R4: 95.2
 R5: 94.6
 R6: 93.5
 R7: 94.0
 R8: 87.2
 R9: 66.3
 R10: 89.1
 R11: 95.0
 R12: 73.8
 R13: 96.0
 R14: 96.4
 R15: 93.2



Test Conditions


Stabilization Time: 23M
 Operation Time: 1H 23M
 Sphere Temperature (°C): 24.1

REPORT NUMBER: SP1-2511-597-4


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	6/16/2025	12/16/2025
Power Meter	XITRON INXT2011004	10/21/2025	10/21/2026
AC Power Source	CHROMA 61603 IN0063	10/21/2025	10/21/2026
DC Power Source	AGILENT E3634A IN0208	10/21/2025	10/21/2026
Sphere Thermometer	ONSET IN0085	10/21/2025	10/21/2026
Room Thermometer	ONSET IN0046	10/21/2025	10/21/2026

REPORT NUMBER: SP1-2511-597-4

CIE 1931 Chromaticity Diagram

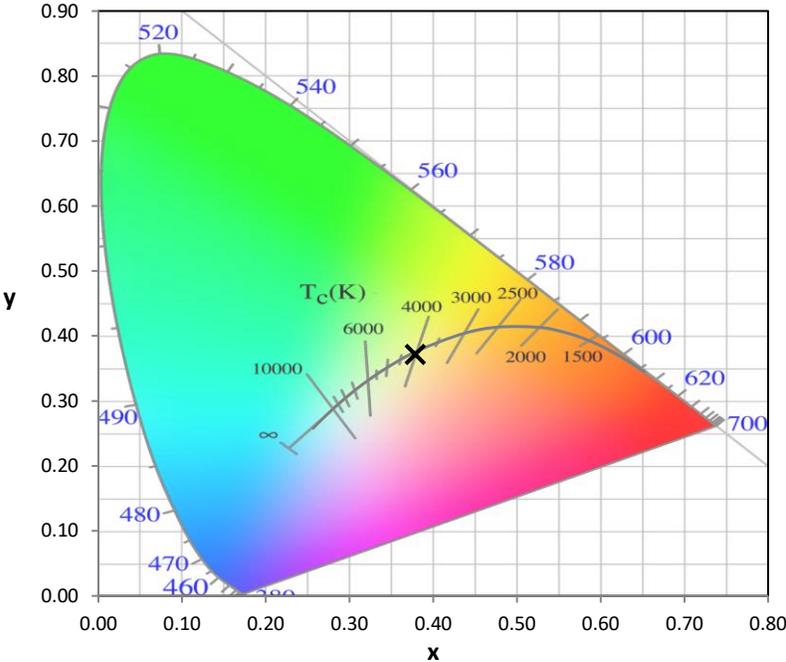

CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

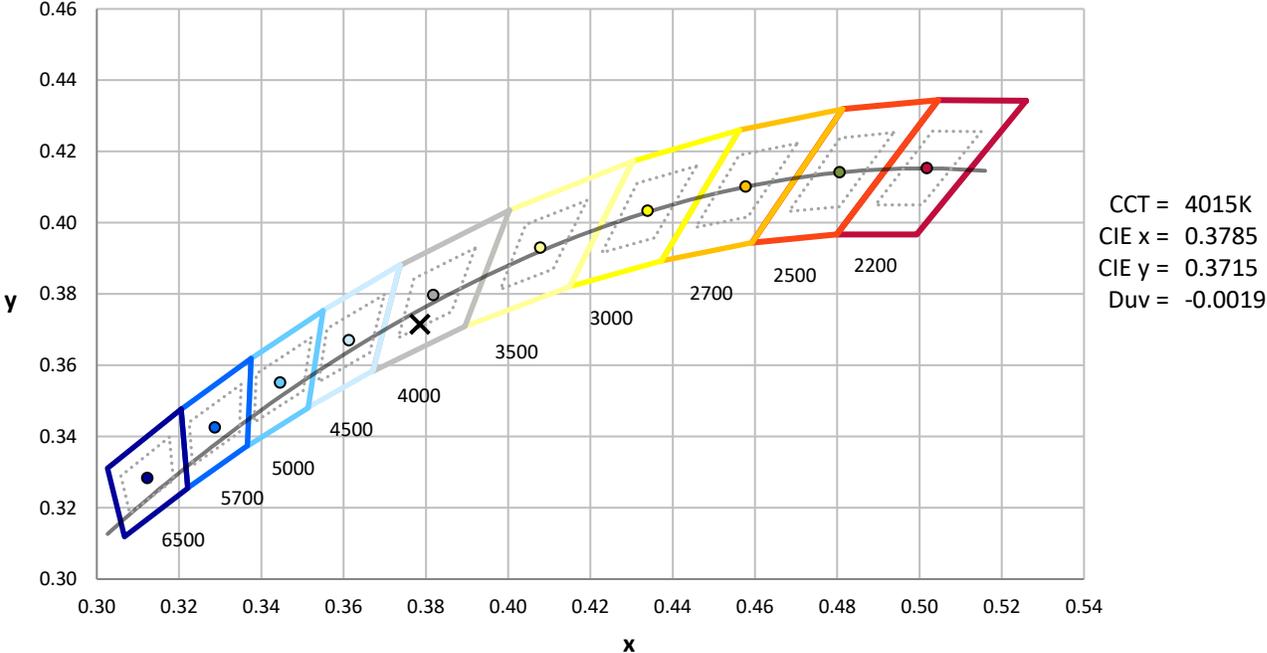


CCT = 4015K
 CIE x = 0.3785
 CIE y = 0.3715
 Duv = -0.0019

Point lies inside the ANSI 4000K 4-step quadrangle

REPORT NUMBER: SP1-2511-597-4

Photopic Flux vs. Wavelength

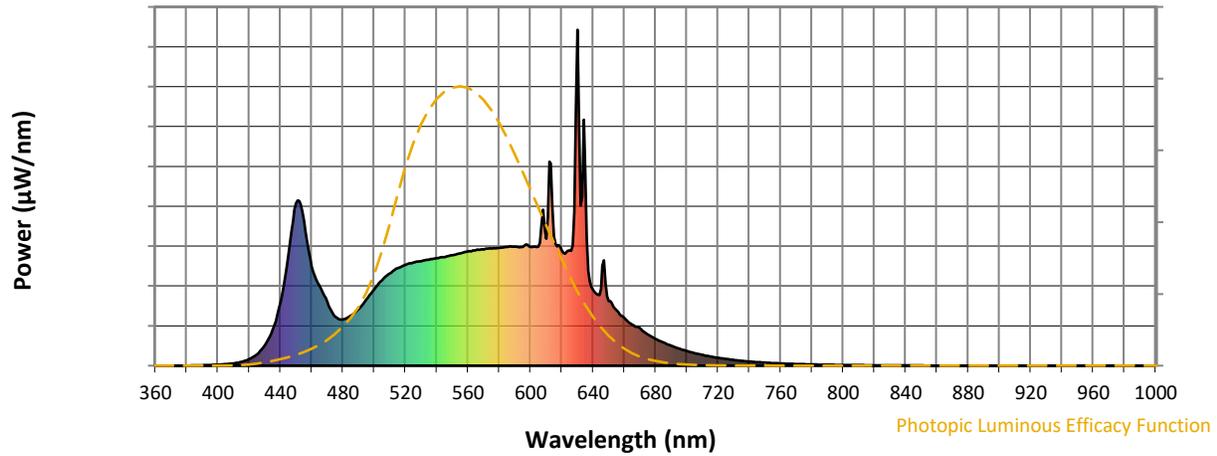

Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)
360	0	NR	490	169	NR	620	343	NR	750	9	NR	880	0	NR
365	0	NR	495	197	NR	625	343	NR	755	8	NR	885	0	NR
370	0	NR	500	228	NR	630	1000	NR	760	7	NR	890	0	NR
375	0	NR	505	254	NR	635	591	NR	765	6	NR	895	0	NR
380	0	NR	510	274	NR	640	225	NR	770	5	NR	900	0	NR
385	1	NR	515	290	NR	645	229	NR	775	4	NR	905	0	NR
390	1	NR	520	300	NR	650	193	NR	780	4	NR	910	0	NR
395	2	NR	525	307	NR	655	165	NR	785	3	NR	915	0	NR
400	3	NR	530	311	NR	660	142	NR	790	3	NR	920	0	NR
405	5	NR	535	316	NR	665	122	NR	795	2	NR	925	0	NR
410	7	NR	540	320	NR	670	112	NR	800	2	NR	930	0	NR
415	11	NR	545	323	NR	675	93	NR	805	2	NR	935	0	NR
420	20	NR	550	329	NR	680	80	NR	810	2	NR	940	0	NR
425	35	NR	555	334	NR	685	69	NR	815	1	NR	945	0	NR
430	61	NR	560	340	NR	690	59	NR	820	1	NR	950	0	NR
435	108	NR	565	344	NR	695	51	NR	825	1	NR	955	0	NR
440	187	NR	570	346	NR	700	43	NR	830	1	NR	960	0	NR
445	329	NR	575	349	NR	705	37	NR	835	1	NR	965	0	NR
450	484	NR	580	351	NR	710	32	NR	840	1	NR	970	0	NR
455	433	NR	585	353	NR	715	27	NR	845	1	NR	975	0	NR
460	296	NR	590	354	NR	720	23	NR	850	1	NR	980	0	NR
465	237	NR	595	353	NR	725	20	NR	855	0	NR	985	0	NR
470	188	NR	600	354	NR	730	17	NR	860	0	NR	990	0	NR
475	146	NR	605	354	NR	735	15	NR	865	0	NR	995	0	NR
480	138	NR	610	378	NR	740	12	NR	870	0	NR	1000	0	NR
485	149	NR	615	385	NR	745	11	NR	875	0	NR			

REPORT NUMBER: SP1-2511-597-4

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.79

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	169	NR	620	343	NR	750	9	NR	880	0	NR
365	0	NR	495	197	NR	625	343	NR	755	8	NR	885	0	NR
370	0	NR	500	228	NR	630	1000	NR	760	7	NR	890	0	NR
375	0	NR	505	254	NR	635	591	NR	765	6	NR	895	0	NR
380	0	NR	510	274	NR	640	225	NR	770	5	NR	900	0	NR
385	1	NR	515	290	NR	645	229	NR	775	4	NR	905	0	NR
390	1	NR	520	300	NR	650	193	NR	780	4	NR	910	0	NR
395	2	NR	525	307	NR	655	165	NR	785	3	NR	915	0	NR
400	3	NR	530	311	NR	660	142	NR	790	3	NR	920	0	NR
405	5	NR	535	316	NR	665	122	NR	795	2	NR	925	0	NR
410	7	NR	540	320	NR	670	112	NR	800	2	NR	930	0	NR
415	11	NR	545	323	NR	675	93	NR	805	2	NR	935	0	NR
420	20	NR	550	329	NR	680	80	NR	810	2	NR	940	0	NR
425	35	NR	555	334	NR	685	69	NR	815	1	NR	945	0	NR
430	61	NR	560	340	NR	690	59	NR	820	1	NR	950	0	NR
435	108	NR	565	344	NR	695	51	NR	825	1	NR	955	0	NR
440	187	NR	570	346	NR	700	43	NR	830	1	NR	960	0	NR
445	329	NR	575	349	NR	705	37	NR	835	1	NR	965	0	NR
450	484	NR	580	351	NR	710	32	NR	840	1	NR	970	0	NR
455	433	NR	585	353	NR	715	27	NR	845	1	NR	975	0	NR
460	296	NR	590	354	NR	720	23	NR	850	1	NR	980	0	NR
465	237	NR	595	353	NR	725	20	NR	855	0	NR	985	0	NR
470	188	NR	600	354	NR	730	17	NR	860	0	NR	990	0	NR
475	146	NR	605	354	NR	735	15	NR	865	0	NR	995	0	NR
480	138	NR	610	378	NR	740	12	NR	870	0	NR	1000	0	NR
485	149	NR	615	385	NR	745	11	NR	875	0	NR			

REPORT NUMBER: SP1-2511-597-4

Melanopic Flux vs. Wavelength




Melanopic Lumens: NR

M/P: 3.74





λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	169	NR	620	343	NR	750	9	NR	880	0	NR
365	0	NR	495	197	NR	625	343	NR	755	8	NR	885	0	NR
370	0	NR	500	228	NR	630	1000	NR	760	7	NR	890	0	NR
375	0	NR	505	254	NR	635	591	NR	765	6	NR	895	0	NR
380	0	NR	510	274	NR	640	225	NR	770	5	NR	900	0	NR
385	1	NR	515	290	NR	645	229	NR	775	4	NR	905	0	NR
390	1	NR	520	300	NR	650	193	NR	780	4	NR	910	0	NR
395	2	NR	525	307	NR	655	165	NR	785	3	NR	915	0	NR
400	3	NR	530	311	NR	660	142	NR	790	3	NR	920	0	NR
405	5	NR	535	316	NR	665	122	NR	795	2	NR	925	0	NR
410	7	NR	540	320	NR	670	112	NR	800	2	NR	930	0	NR
415	11	NR	545	323	NR	675	93	NR	805	2	NR	935	0	NR
420	20	NR	550	329	NR	680	80	NR	810	2	NR	940	0	NR
425	35	NR	555	334	NR	685	69	NR	815	1	NR	945	0	NR
430	61	NR	560	340	NR	690	59	NR	820	1	NR	950	0	NR
435	108	NR	565	344	NR	695	51	NR	825	1	NR	955	0	NR
440	187	NR	570	346	NR	700	43	NR	830	1	NR	960	0	NR
445	329	NR	575	349	NR	705	37	NR	835	1	NR	965	0	NR
450	484	NR	580	351	NR	710	32	NR	840	1	NR	970	0	NR
455	433	NR	585	353	NR	715	27	NR	845	1	NR	975	0	NR
460	296	NR	590	354	NR	720	23	NR	850	1	NR	980	0	NR
465	237	NR	595	353	NR	725	20	NR	855	0	NR	985	0	NR
470	188	NR	600	354	NR	730	17	NR	860	0	NR	990	0	NR
475	146	NR	605	354	NR	735	15	NR	865	0	NR	995	0	NR
480	138	NR	610	378	NR	740	12	NR	870	0	NR	1000	0	NR
485	149	NR	615	385	NR	745	11	NR	875	0	NR			

Summary

$R_f = 90.7$
 $R_g = 100.2$
 $CIE R_a = 93.9$
 $R_9 = 66.3$

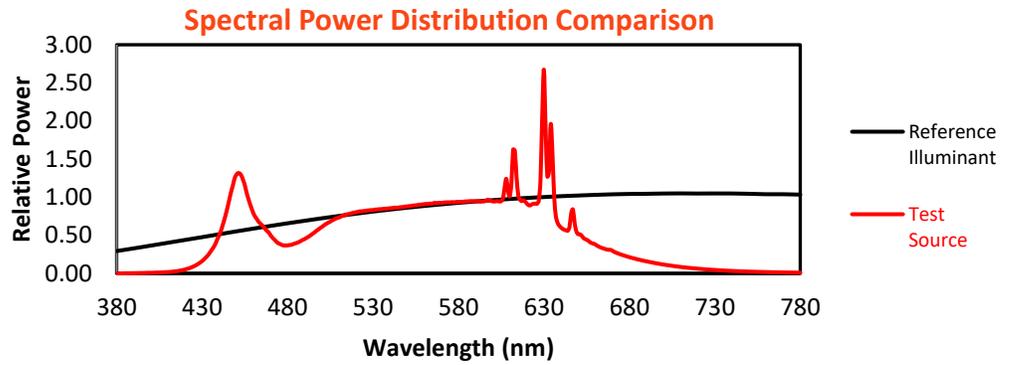


Color Vector Graphics

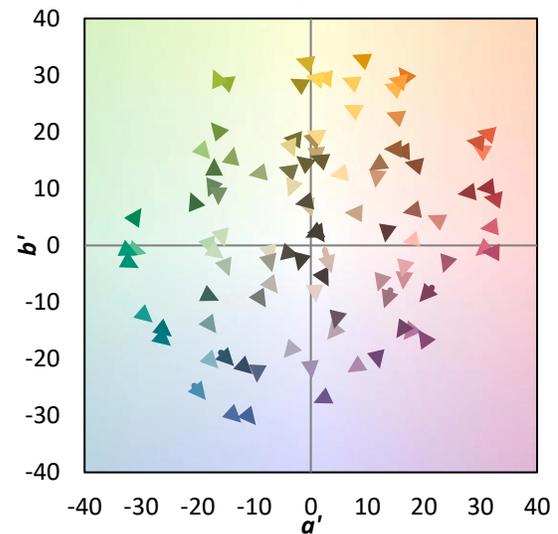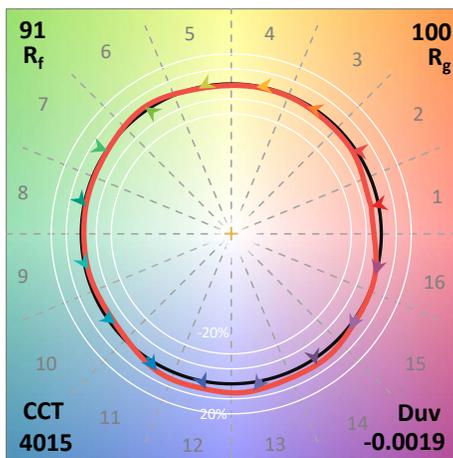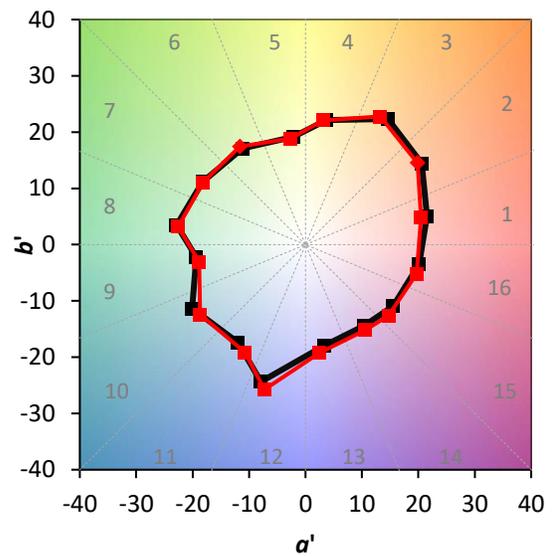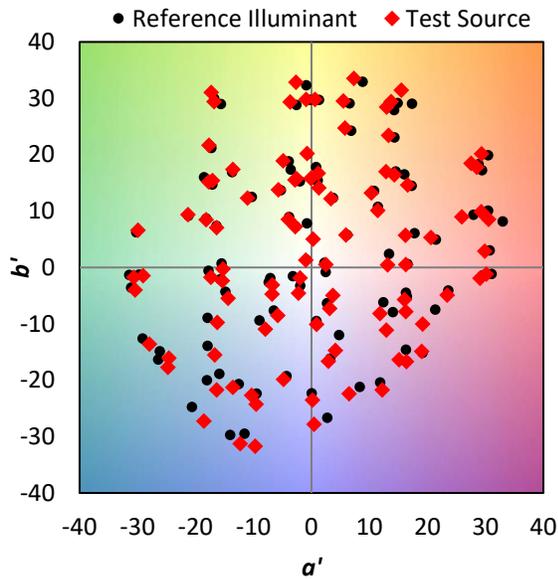


Individual Sample Fidelity Index ($R_{f,i}$)

CES01 = 86	CES26 = 92	CES51 = 98	CES76 = 84
CES02 = 62	CES27 = 91	CES52 = 98	CES77 = 87
CES03 = 31	CES28 = 95	CES53 = 97	CES78 = 81
CES04 = 69	CES29 = 95	CES54 = 93	CES79 = 94
CES05 = 49	CES30 = 93	CES55 = 92	CES80 = 92
CES06 = 50	CES31 = 95	CES56 = 95	CES81 = 81
CES07 = 42	CES32 = 87	CES57 = 94	CES82 = 96
CES08 = 41	CES33 = 99	CES58 = 94	CES83 = 96
CES09 = 29	CES34 = 91	CES59 = 97	CES84 = 93
CES10 = 74	CES35 = 95	CES60 = 92	CES85 = 81
CES11 = 57	CES36 = 80	CES61 = 92	CES86 = 84
CES12 = 63	CES37 = 93	CES62 = 85	CES87 = 91
CES13 = 43	CES38 = 87	CES63 = 92	CES88 = 98
CES14 = 74	CES39 = 99	CES64 = 90	CES89 = 85
CES15 = 71	CES40 = 97	CES65 = 88	CES90 = 98
CES16 = 47	CES41 = 97	CES66 = 86	CES91 = 71
CES17 = 49	CES42 = 91	CES67 = 85	CES92 = 77
CES18 = 56	CES43 = 91	CES68 = 87	CES93 = 86
CES19 = 71	CES44 = 99	CES69 = 87	CES94 = 76
CES20 = 66	CES45 = 95	CES70 = 84	CES95 = 82
CES21 = 85	CES46 = 96	CES71 = 78	CES96 = 92
CES22 = 78	CES47 = 94	CES72 = 93	CES97 = 95
CES23 = 91	CES48 = 92	CES73 = 78	CES98 = 95
CES24 = 90	CES49 = 95	CES74 = 91	CES99 = 94
CES25 = 71	CES50 = 99	CES75 = 80	

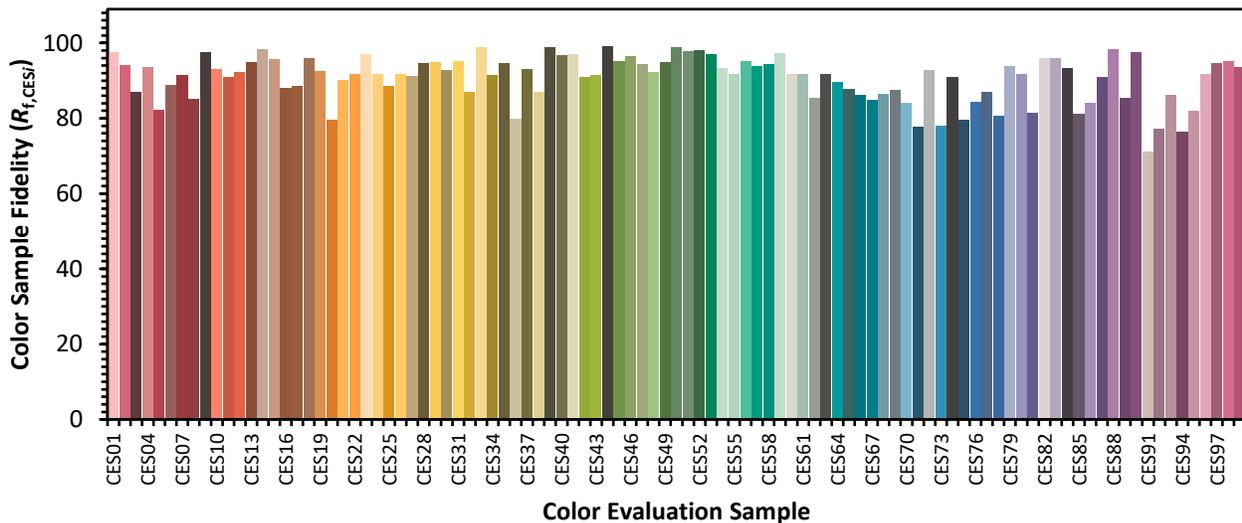

Color Rendition by Hue-Angle Bin

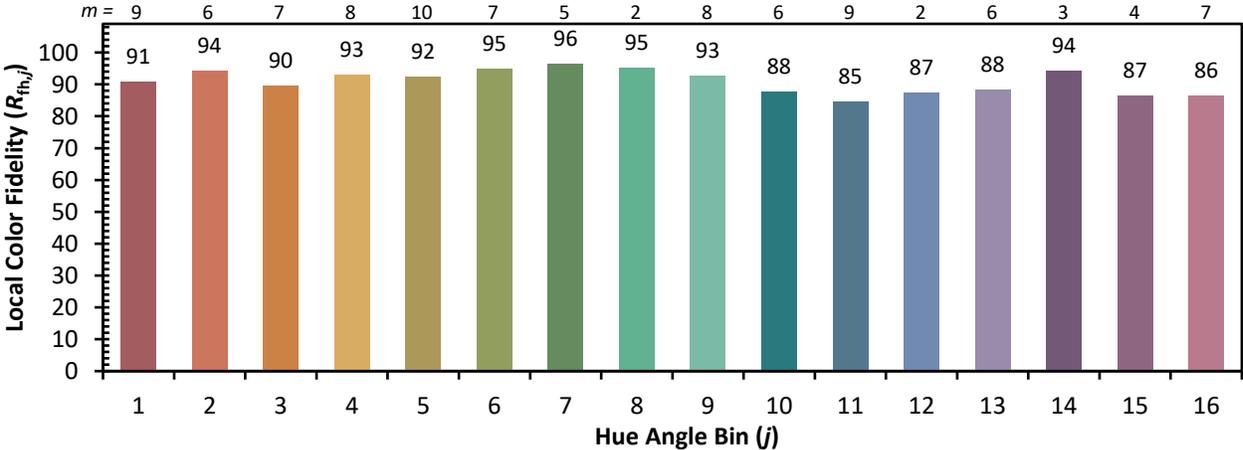

Measure Comparisons



(END OF REPORT)