

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: FAIL-SAFE

Report Number: P1357233

Luminaire Tested: 4ASL4-35VHE-3-35-UNV

Issue Date: 2/17/2026

Test Information

Test Method: LM-79-2019
Report Number: P1357233
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2511-597-12)
Test Lab: INNOVATION CENTER
Issue Date: 2/17/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: FAIL-SAFE
Catalog Number: 4ASL4-35VHE-3-35-UNV
Description: 4FT 3500 LUMEN PER FOOT 4ASL LED LUMINAIRE WITH OPL LENS AND 3500K LEDS 3 ROW
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 13860.0 lumens
Efficiency: N/A
Efficacy: 109.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.3 / 1.39
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 3.98' x H: 0.1')
CIE Type: Direct

Input Watts (W): 126.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1357233
CATALOG NUMBER: 4ASL4-35VHE-3-35-UNV

Luminous Intensity Polar Plot

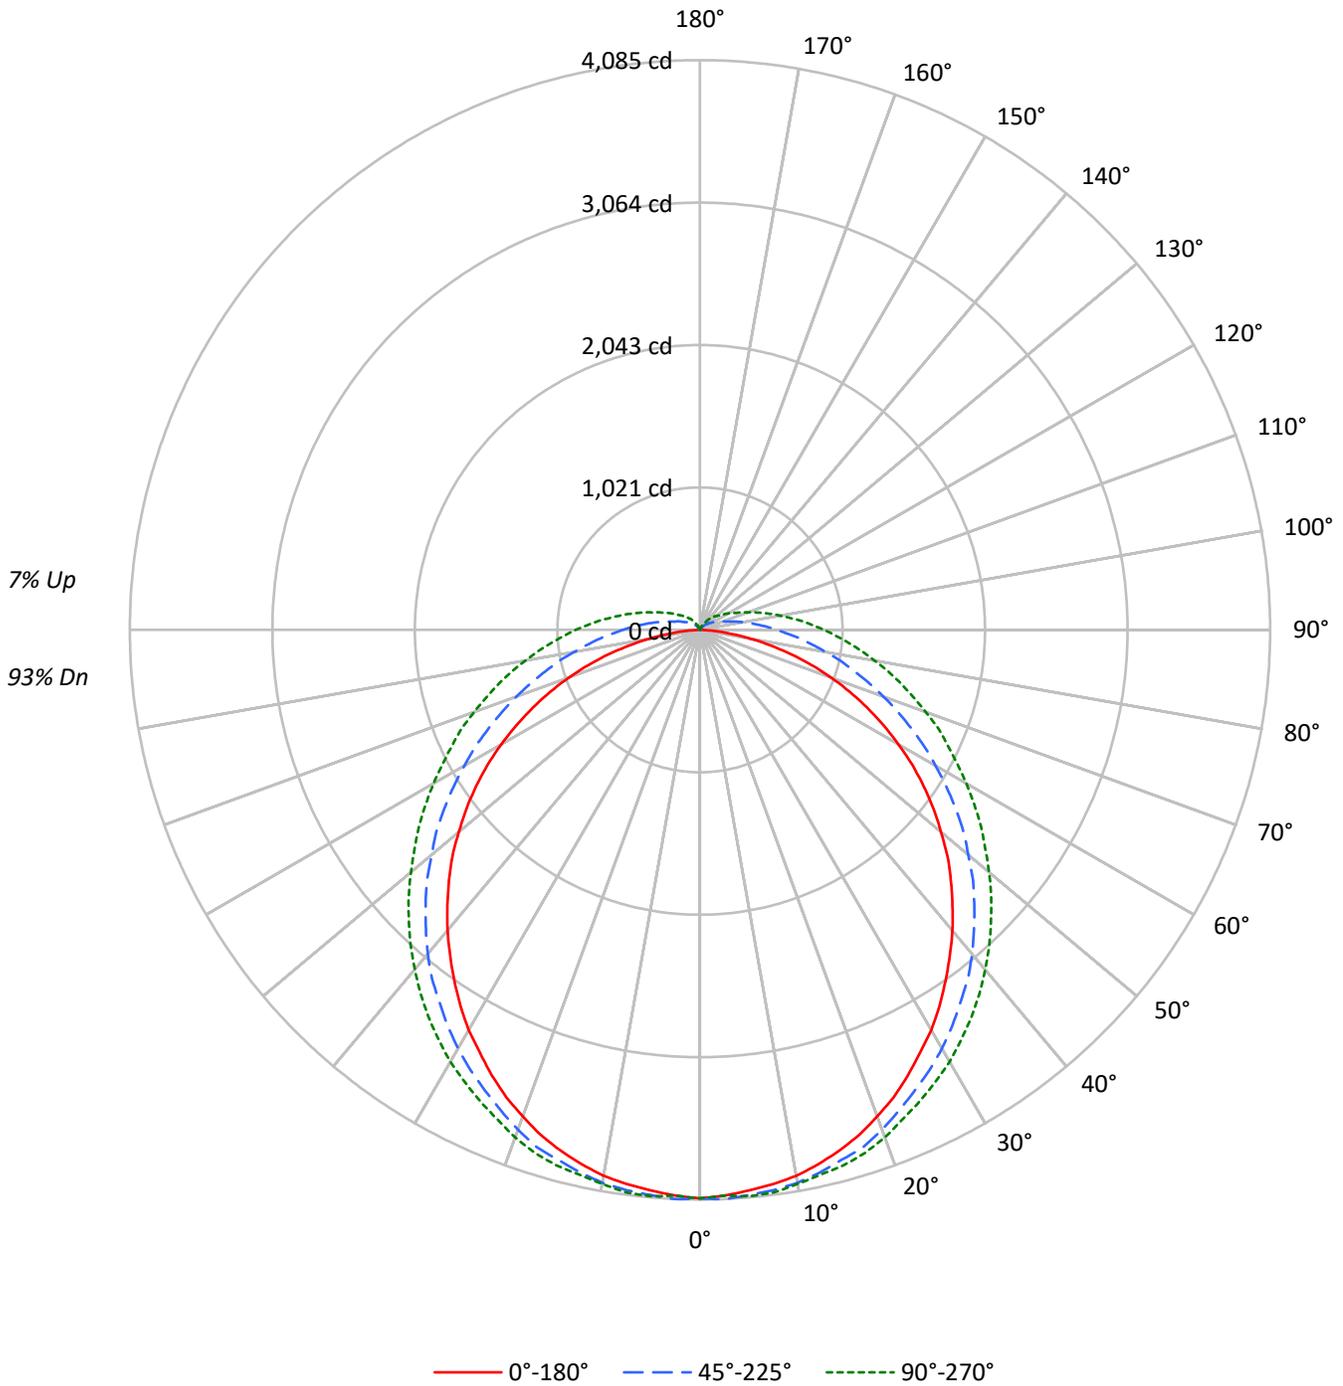



TEST NUMBER: P1357233
 CATALOG NUMBER: 4ASL4-35VHE-3-35-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	117	117	117	117	114	114	114	114	107	107	107	101	101	101	96	96	96	96	96	96	93
1	105	100	95	91	102	97	92	88	91	88	84	86	83	80	81	79	77	77	77	77	74
2	95	86	79	72	92	84	77	71	79	73	68	75	70	66	71	67	63	63	63	63	61
3	86	75	67	60	83	73	65	59	69	62	57	65	60	55	62	57	53	53	53	53	50
4	79	66	57	50	76	65	56	49	61	54	48	58	52	47	55	50	45	45	45	45	43
5	73	59	50	43	70	58	49	42	55	47	41	52	45	40	49	44	39	39	39	39	37
6	67	53	44	37	64	52	43	37	49	42	36	47	40	35	45	39	34	34	34	34	32
7	62	48	39	33	60	47	38	32	45	37	32	43	36	31	41	35	30	30	30	30	28
8	58	44	35	29	56	43	35	29	41	34	28	39	32	28	37	32	27	27	27	27	25
9	54	40	32	26	52	39	31	26	38	30	25	36	30	25	35	29	24	24	24	24	22
10	50	37	29	24	49	36	29	23	35	28	23	33	27	23	32	26	22	22	22	22	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	33081	33081	33081
5°	32787	32458	32324
10°	32603	31829	31506
15°	32242	31045	30813
20°	31755	30295	30032
25°	31187	29353	29143
30°	30589	28535	28391
35°	29846	27610	27554
40°	29167	26763	26674
45°	28435	25739	25789
50°	27600	24639	24870
55°	26700	23588	24043
60°	25527	22361	23204
65°	24038	21181	22508
70°	22135	20013	21963
75°	19367	18943	21590
80°	15174	18139	21429
85°	9109	17948	21747

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 28435 cd/sqm



TEST NUMBER: P1357233
 CATALOG NUMBER: 4ASL4-35VHE-3-35-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	386.5	2.8
10°-20°	1109.9	8.0
20°-30°	1678.0	12.1
30°-40°	2031.8	14.7
40°-50°	2134.0	15.4
50°-60°	1991.0	14.4
60°-70°	1645.4	11.9
70°-80°	1184.7	8.5
80°-90°	736.2	5.3
90°-100°	431.4	3.1
100°-110°	246.8	1.8
110°-120°	139.3	1.0
120°-130°	80.2	0.6
130°-140°	43.2	0.3
140°-150°	18.2	0.1
150°-160°	3.4	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3174.4	22.9
0°-40°	5206.3	37.6
0°-60°	9331.3	67.3
0°-90°	12897.6	93.1
90°-120°	817.5	5.9
90°-150°	959.0	6.9
90°-180°	962.0	6.9
0°-180°	13860.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4076	4076	4076	4076	4076	
5°	4034	4068	4068	4068	4076	383
15°	3864	3915	3932	3958	3975	1090
25°	3526	3585	3644	3695	3729	1624
35°	3068	3153	3254	3348	3390	1920
45°	2542	2636	2780	2898	2949	1962
55°	1958	2068	2237	2398	2458	1749
65°	1322	1449	1670	1881	1958	1308
75°	678	848	1144	1390	1492	717
85°	127	381	720	975	1068	155
90°	0	229	551	788	890	6
95°	0	144	415	636	729	0
105°	0	51	229	398	466	0
115°	0	25	136	246	288	0
125°	0	17	85	161	186	0
135°	0	0	51	102	127	0
145°	0	0	25	59	68	0
155°	0	0	0	17	25	0
165°	0	0	0	0	0	0
175°	0	0	0	0	0	0
180°	0	0	0	0	0	0



TEST NUMBER: P1357233

CATALOG NUMBER: 4ASL4-35VHE-3-35-UNV

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4076.4	4076.4	4076.4	4076.4	4076.4
2.5°	4059.5	4084.9	4084.9	4059.5	4059.5
5°	4034.0	4067.9	4067.9	4067.9	4076.4
7.5°	4008.6	4051.0	4051.0	4051.0	4067.9
10°	3974.7	4017.1	4025.6	4025.6	4034.0
12.5°	3923.9	3974.7	3983.2	3991.7	4000.1
15°	3864.5	3915.4	3932.3	3957.8	3974.7
17.5°	3796.7	3856.1	3890.0	3915.4	3932.3
20°	3712.0	3771.3	3813.7	3847.6	3873.0
22.5°	3627.2	3678.1	3728.9	3771.3	3796.7
25°	3525.5	3584.9	3644.2	3695.0	3728.9
27.5°	3415.4	3483.2	3559.4	3618.8	3652.7
30°	3313.7	3381.5	3466.2	3542.5	3576.4
32.5°	3195.0	3271.3	3364.5	3440.8	3483.2
35°	3067.9	3152.7	3254.3	3347.6	3389.9
37.5°	2940.8	3025.5	3152.7	3245.9	3288.2
40°	2813.7	2898.4	3034.0	3135.7	3178.1
42.5°	2678.1	2762.8	2906.9	3017.1	3067.9
45°	2542.5	2635.7	2779.8	2898.4	2949.3
47.5°	2406.9	2500.1	2652.6	2779.8	2830.6
50°	2254.3	2356.0	2508.6	2652.6	2703.5
52.5°	2110.2	2211.9	2381.4	2525.5	2576.4
55°	1957.7	2067.9	2237.4	2398.4	2457.7
57.5°	1805.1	1915.3	2093.3	2262.8	2330.6
60°	1644.1	1762.8	1949.2	2127.2	2203.5
62.5°	1483.1	1610.2	1813.6	2000.1	2076.3
65°	1322.1	1449.2	1669.5	1881.4	1957.7
67.5°	1161.1	1296.7	1534.0	1754.3	1847.5
70°	1000.0	1144.1	1398.4	1627.2	1720.4
72.5°	839.0	991.6	1271.2	1508.5	1601.8
75°	678.0	847.5	1144.1	1389.9	1491.6
77.5°	517.0	711.9	1033.9	1279.7	1381.4
80°	372.9	593.2	915.3	1169.5	1271.2
82.5°	237.3	474.6	813.6	1067.8	1169.5
85°	127.1	381.4	720.4	974.6	1067.8
87.5°	42.4	296.6	627.1	881.4	974.6
90°	0.0	228.8	550.9	788.2	889.9
92.5°	0.0	178.0	483.1	711.9	805.1
95°	0.0	144.1	415.3	635.6	728.8
97.5°	0.0	118.6	364.4	567.8	652.6
100°	0.0	93.2	313.6	508.5	584.8
102.5°	0.0	76.3	271.2	449.2	525.4
105°	0.0	50.8	228.8	398.3	466.1
107.5°	0.0	42.4	194.9	355.9	415.3
110°	0.0	33.9	178.0	305.1	364.4



TEST NUMBER: P1357233
 CATALOG NUMBER: 4ASL4-35VHE-3-35-UNV

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	0.0	25.4	161.0	271.2	330.5
115°	0.0	25.4	135.6	245.8	288.1
117.5°	0.0	25.4	118.6	220.3	262.7
120°	0.0	16.9	110.2	194.9	237.3
122.5°	0.0	16.9	93.2	178.0	211.9
125°	0.0	16.9	84.7	161.0	186.4
127.5°	0.0	8.5	76.3	144.1	169.5
130°	0.0	8.5	67.8	127.1	152.5
132.5°	0.0	8.5	59.3	118.6	144.1
135°	0.0	0.0	50.8	101.7	127.1
137.5°	0.0	0.0	42.4	93.2	110.2
140°	0.0	0.0	33.9	76.3	101.7
142.5°	0.0	0.0	25.4	67.8	84.7
145°	0.0	0.0	25.4	59.3	67.8
147.5°	0.0	0.0	16.9	42.4	59.3
150°	0.0	0.0	8.5	33.9	42.4
152.5°	0.0	0.0	0.0	25.4	33.9
155°	0.0	0.0	0.0	16.9	25.4
157.5°	0.0	0.0	0.0	0.0	8.5
160°	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1357233
 CATALOG NUMBER: 4ASL4-35VHE-3-35-UNV

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	21.49	23.03	21.96	23.48	23.97	23.52	25.06	23.98	25.51	25.99
	3H	22.99	24.39	23.47	24.86	25.38	25.98	27.38	26.46	27.85	28.37
	4H	23.47	24.80	23.97	25.28	25.82	27.18	28.51	27.68	28.99	29.53
	6H	23.74	24.98	24.26	25.48	26.03	28.43	29.67	28.94	30.16	30.72
	8H	23.79	24.98	24.32	25.50	26.06	29.08	30.26	29.60	30.78	31.34
	12H	23.81	24.95	24.34	25.46	26.05	29.79	30.92	30.32	31.44	32.03
4H	2H	22.37	23.70	22.87	24.18	24.72	23.95	25.28	24.45	25.76	26.30
	3H	24.10	25.24	24.62	25.76	26.32	26.64	27.77	27.15	28.30	28.86
	4H	24.71	25.74	25.24	26.28	26.87	28.01	29.05	28.54	29.58	30.17
	6H	25.10	26.02	25.66	26.58	27.19	29.45	30.37	30.01	30.93	31.54
	8H	25.20	26.06	25.76	26.62	27.24	30.20	31.07	30.76	31.63	32.25
	12H	25.24	26.03	25.82	26.62	27.24	31.04	31.82	31.62	32.41	33.04
8H	4H	25.39	26.25	25.95	26.81	27.43	28.22	29.09	28.78	29.65	30.27
	6H	25.97	26.70	26.56	27.30	27.93	29.84	30.57	30.43	31.17	31.80
	8H	26.15	26.81	26.75	27.42	28.06	30.73	31.39	31.34	32.01	32.64
	12H	26.26	26.85	26.87	27.46	28.16	31.75	32.34	32.36	32.95	33.65
12H	4H	25.58	26.36	26.16	26.95	27.58	28.23	29.02	28.81	29.61	30.23
	6H	26.26	26.92	26.86	27.54	28.17	29.87	30.54	30.48	31.15	31.79
	8H	26.54	27.13	27.15	27.73	28.44	30.84	31.43	31.44	32.03	32.73

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Fail-Safe

Report Number: SP1-2511-597-1

Test Date: 11/17/2025

Luminaire Tested: 4ASL-2-35-UNV-OPL-1_600mA

Data in this report applies to families of products including 4ASL

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2511-597-1
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 11/18/2025
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Fail-Safe
 Catalog Number: **4ASL-2-35-UNV-OPL-1_600mA**
 Description: 2foot 4ASL LED LUMINAIRE WITH OPL LENS AND 3500K LEDs with 1 rows at 600mA

Spectral Parameters

CCT (K): 3487
 CIE u': 0.2366
 CIE v': 0.5099
 Duv: -0.0012
 CIE x: 0.4047
 CIE y: 0.3876
 CIE z: 0.2077
 Peak Wavelength (nm): 630
 Dominant Wavelength (nm): 581
 Purity: 37.79273
 R_f: 90
 R_g: 102.4

CRI (Ra):	92.5		
R1:	94.7	R9:	61.3
R2:	94.3	R10:	85.5
R3:	92.9	R11:	93.7
R4:	93.3	R12:	80.8
R5:	93.9	R13:	94.3
R6:	93.4	R14:	95.1
R7:	92.5	R15:	90.9
R8:	85.2		



Test Conditions


Stabilization Time: 31M
 Operation Time: 1H 31M
 Sphere Temperature (°C): 24.1

REPORT NUMBER: SP1-2511-597-1


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	6/16/2025	12/16/2025
Power Meter	XITRON INXT2011004	10/21/2025	10/21/2026
AC Power Source	CHROMA 61603 IN0063	10/21/2025	10/21/2026
DC Power Source	AGILENT E3634A IN0208	10/21/2025	10/21/2026
Sphere Thermometer	ONSET IN0085	10/21/2025	10/21/2026
Room Thermometer	ONSET IN0046	10/21/2025	10/21/2026

REPORT NUMBER: SP1-2511-597-1

CIE 1931 Chromaticity Diagram

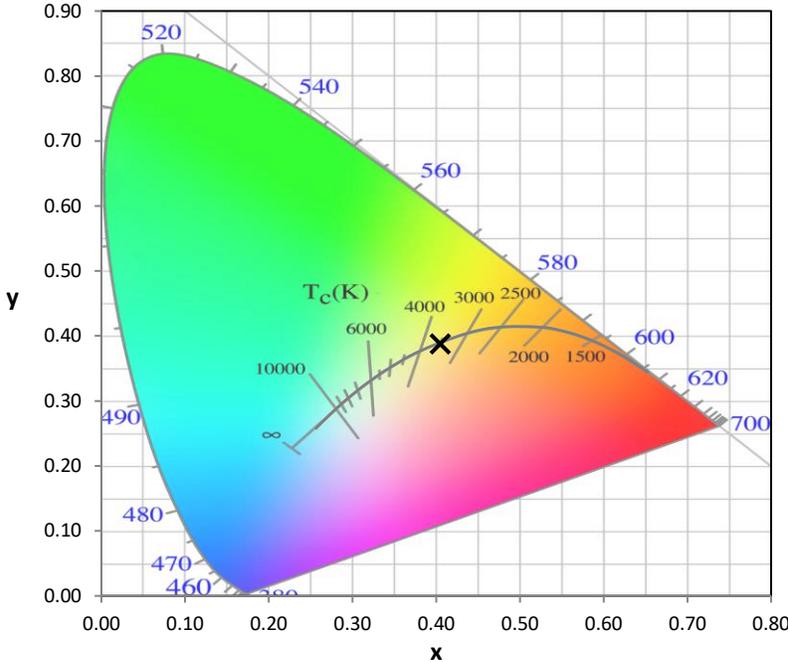

CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

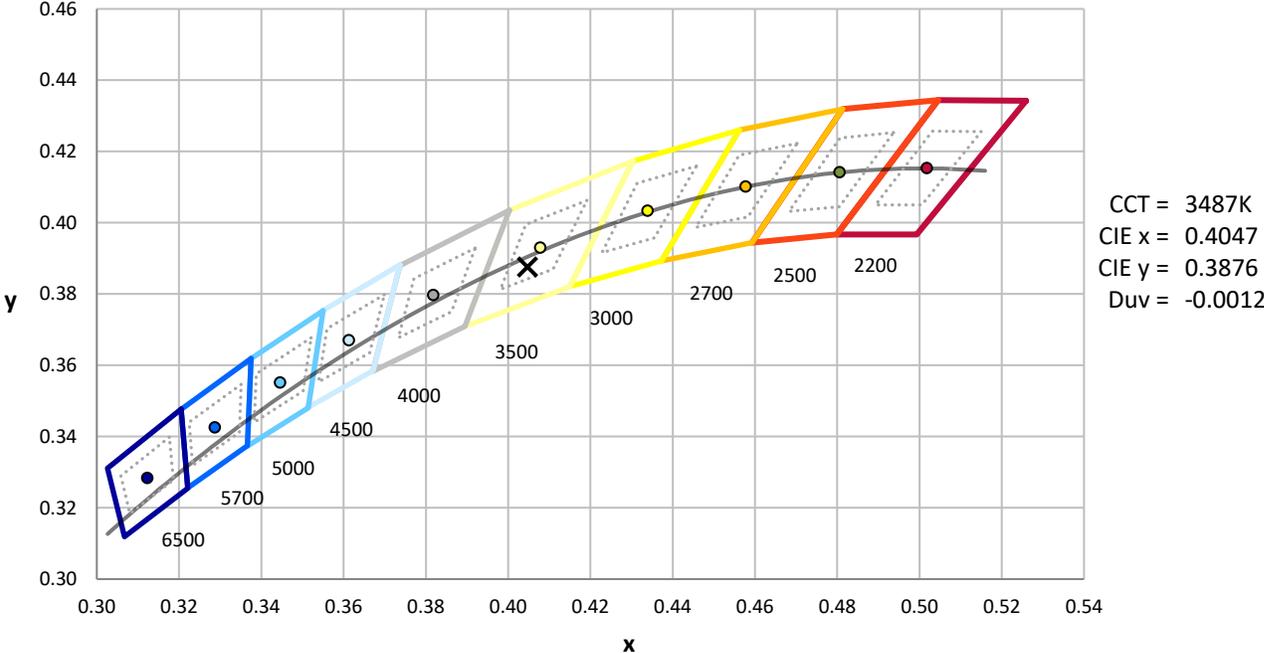

Point lies inside the ANSI 3500K 4-step quadrangle

REPORT NUMBER: SP1-2511-597-1

Photopic Flux vs. Wavelength



Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	122	NR	620	322	NR	750	8	NR	880	0	NR
365	0	NR	495	152	NR	625	323	NR	755	7	NR	885	0	NR
370	0	NR	500	180	NR	630	1000	NR	760	6	NR	890	0	NR
375	0	NR	505	205	NR	635	589	NR	765	5	NR	895	0	NR
380	0	NR	510	223	NR	640	210	NR	770	4	NR	900	0	NR
385	1	NR	515	238	NR	645	214	NR	775	4	NR	905	0	NR
390	1	NR	520	247	NR	650	181	NR	780	3	NR	910	0	NR
395	2	NR	525	252	NR	655	155	NR	785	3	NR	915	0	NR
400	3	NR	530	258	NR	660	133	NR	790	2	NR	920	0	NR
405	5	NR	535	262	NR	665	113	NR	795	2	NR	925	0	NR
410	7	NR	540	267	NR	670	104	NR	800	2	NR	930	0	NR
415	13	NR	545	271	NR	675	86	NR	805	2	NR	935	0	NR
420	24	NR	550	277	NR	680	74	NR	810	1	NR	940	0	NR
425	42	NR	555	284	NR	685	64	NR	815	1	NR	945	0	NR
430	72	NR	560	291	NR	690	55	NR	820	1	NR	950	0	NR
435	122	NR	565	296	NR	695	47	NR	825	1	NR	955	0	NR
440	207	NR	570	301	NR	700	40	NR	830	1	NR	960	0	NR
445	317	NR	575	306	NR	705	34	NR	835	1	NR	965	0	NR
450	304	NR	580	310	NR	710	29	NR	840	1	NR	970	0	NR
455	193	NR	585	315	NR	715	25	NR	845	1	NR	975	0	NR
460	149	NR	590	318	NR	720	21	NR	850	0	NR	980	0	NR
465	117	NR	595	320	NR	725	18	NR	855	0	NR	985	0	NR
470	85	NR	600	322	NR	730	15	NR	860	0	NR	990	0	NR
475	78	NR	605	325	NR	735	13	NR	865	0	NR	995	0	NR
480	84	NR	610	351	NR	740	11	NR	870	0	NR	1000	0	NR
485	98	NR	615	362	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2511-597-1

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.58

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	122	NR	620	322	NR	750	8	NR	880	0	NR
365	0	NR	495	152	NR	625	323	NR	755	7	NR	885	0	NR
370	0	NR	500	180	NR	630	1000	NR	760	6	NR	890	0	NR
375	0	NR	505	205	NR	635	589	NR	765	5	NR	895	0	NR
380	0	NR	510	223	NR	640	210	NR	770	4	NR	900	0	NR
385	1	NR	515	238	NR	645	214	NR	775	4	NR	905	0	NR
390	1	NR	520	247	NR	650	181	NR	780	3	NR	910	0	NR
395	2	NR	525	252	NR	655	155	NR	785	3	NR	915	0	NR
400	3	NR	530	258	NR	660	133	NR	790	2	NR	920	0	NR
405	5	NR	535	262	NR	665	113	NR	795	2	NR	925	0	NR
410	7	NR	540	267	NR	670	104	NR	800	2	NR	930	0	NR
415	13	NR	545	271	NR	675	86	NR	805	2	NR	935	0	NR
420	24	NR	550	277	NR	680	74	NR	810	1	NR	940	0	NR
425	42	NR	555	284	NR	685	64	NR	815	1	NR	945	0	NR
430	72	NR	560	291	NR	690	55	NR	820	1	NR	950	0	NR
435	122	NR	565	296	NR	695	47	NR	825	1	NR	955	0	NR
440	207	NR	570	301	NR	700	40	NR	830	1	NR	960	0	NR
445	317	NR	575	306	NR	705	34	NR	835	1	NR	965	0	NR
450	304	NR	580	310	NR	710	29	NR	840	1	NR	970	0	NR
455	193	NR	585	315	NR	715	25	NR	845	1	NR	975	0	NR
460	149	NR	590	318	NR	720	21	NR	850	0	NR	980	0	NR
465	117	NR	595	320	NR	725	18	NR	855	0	NR	985	0	NR
470	85	NR	600	322	NR	730	15	NR	860	0	NR	990	0	NR
475	78	NR	605	325	NR	735	13	NR	865	0	NR	995	0	NR
480	84	NR	610	351	NR	740	11	NR	870	0	NR	1000	0	NR
485	98	NR	615	362	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2511-597-1

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 3.15


λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	122	NR	620	322	NR	750	8	NR	880	0	NR
365	0	NR	495	152	NR	625	323	NR	755	7	NR	885	0	NR
370	0	NR	500	180	NR	630	1000	NR	760	6	NR	890	0	NR
375	0	NR	505	205	NR	635	589	NR	765	5	NR	895	0	NR
380	0	NR	510	223	NR	640	210	NR	770	4	NR	900	0	NR
385	1	NR	515	238	NR	645	214	NR	775	4	NR	905	0	NR
390	1	NR	520	247	NR	650	181	NR	780	3	NR	910	0	NR
395	2	NR	525	252	NR	655	155	NR	785	3	NR	915	0	NR
400	3	NR	530	258	NR	660	133	NR	790	2	NR	920	0	NR
405	5	NR	535	262	NR	665	113	NR	795	2	NR	925	0	NR
410	7	NR	540	267	NR	670	104	NR	800	2	NR	930	0	NR
415	13	NR	545	271	NR	675	86	NR	805	2	NR	935	0	NR
420	24	NR	550	277	NR	680	74	NR	810	1	NR	940	0	NR
425	42	NR	555	284	NR	685	64	NR	815	1	NR	945	0	NR
430	72	NR	560	291	NR	690	55	NR	820	1	NR	950	0	NR
435	122	NR	565	296	NR	695	47	NR	825	1	NR	955	0	NR
440	207	NR	570	301	NR	700	40	NR	830	1	NR	960	0	NR
445	317	NR	575	306	NR	705	34	NR	835	1	NR	965	0	NR
450	304	NR	580	310	NR	710	29	NR	840	1	NR	970	0	NR
455	193	NR	585	315	NR	715	25	NR	845	1	NR	975	0	NR
460	149	NR	590	318	NR	720	21	NR	850	0	NR	980	0	NR
465	117	NR	595	320	NR	725	18	NR	855	0	NR	985	0	NR
470	85	NR	600	322	NR	730	15	NR	860	0	NR	990	0	NR
475	78	NR	605	325	NR	735	13	NR	865	0	NR	995	0	NR
480	84	NR	610	351	NR	740	11	NR	870	0	NR	1000	0	NR
485	98	NR	615	362	NR	745	10	NR	875	0	NR			

Summary

$R_f = 90$
 $R_g = 102.4$
 CIE $R_a = 92.5$
 $R_9 = 61.3$



Color Vector Graphics



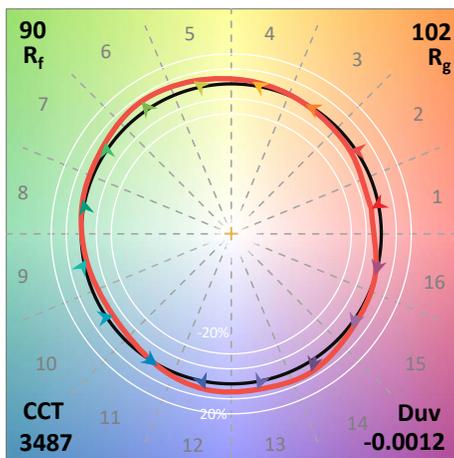


Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 86	CES26 = 87	CES51 = 95	CES76 = 82
CES02 = 62	CES27 = 96	CES52 = 94	CES77 = 89
CES03 = 31	CES28 = 93	CES53 = 90	CES78 = 79
CES04 = 70	CES29 = 84	CES54 = 98	CES79 = 93
CES05 = 50	CES30 = 89	CES55 = 97	CES80 = 91
CES06 = 51	CES31 = 85	CES56 = 91	CES81 = 81
CES07 = 43	CES32 = 80	CES57 = 90	CES82 = 96
CES08 = 41	CES33 = 86	CES58 = 91	CES83 = 94
CES09 = 29	CES34 = 88	CES59 = 98	CES84 = 95
CES10 = 75	CES35 = 93	CES60 = 97	CES85 = 84
CES11 = 58	CES36 = 93	CES61 = 96	CES86 = 82
CES12 = 64	CES37 = 91	CES62 = 98	CES87 = 90
CES13 = 43	CES38 = 95	CES63 = 91	CES88 = 94
CES14 = 74	CES39 = 96	CES64 = 93	CES89 = 83
CES15 = 71	CES40 = 92	CES65 = 90	CES90 = 94
CES16 = 47	CES41 = 93	CES66 = 91	CES91 = 83
CES17 = 49	CES42 = 87	CES67 = 91	CES92 = 80
CES18 = 56	CES43 = 85	CES68 = 91	CES93 = 89
CES19 = 71	CES44 = 99	CES69 = 93	CES94 = 75
CES20 = 66	CES45 = 90	CES70 = 87	CES95 = 85
CES21 = 86	CES46 = 90	CES71 = 85	CES96 = 91
CES22 = 78	CES47 = 86	CES72 = 95	CES97 = 90
CES23 = 91	CES48 = 91	CES73 = 80	CES98 = 91
CES24 = 90	CES49 = 88	CES74 = 94	CES99 = 92
CES25 = 71	CES50 = 94	CES75 = 84	



Color Rendition by Hue-Angle Bin

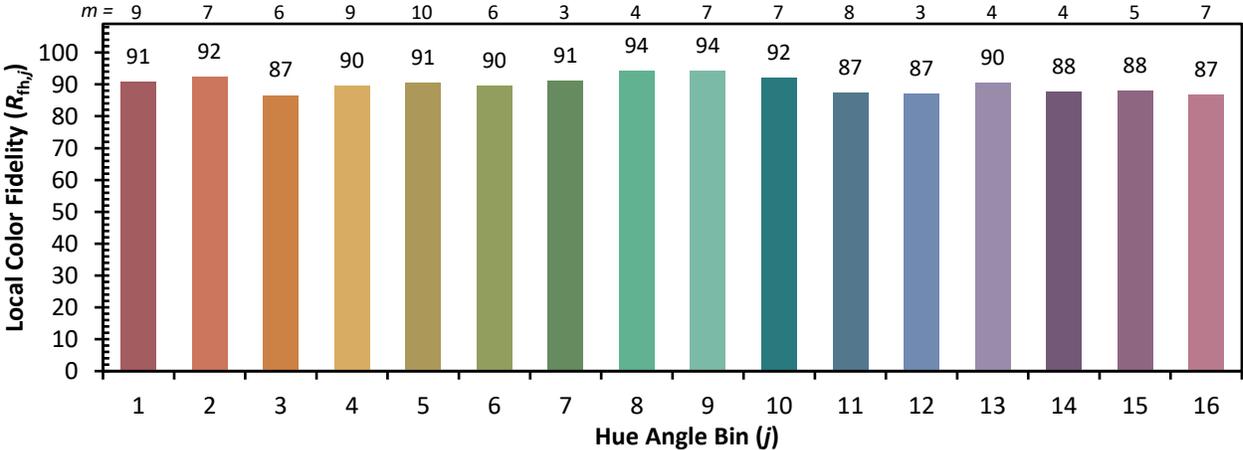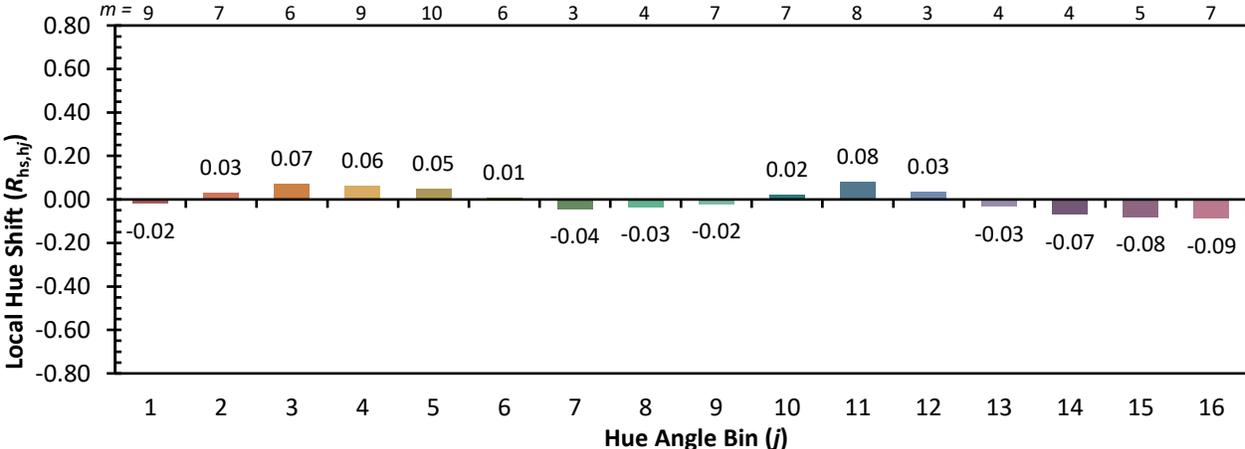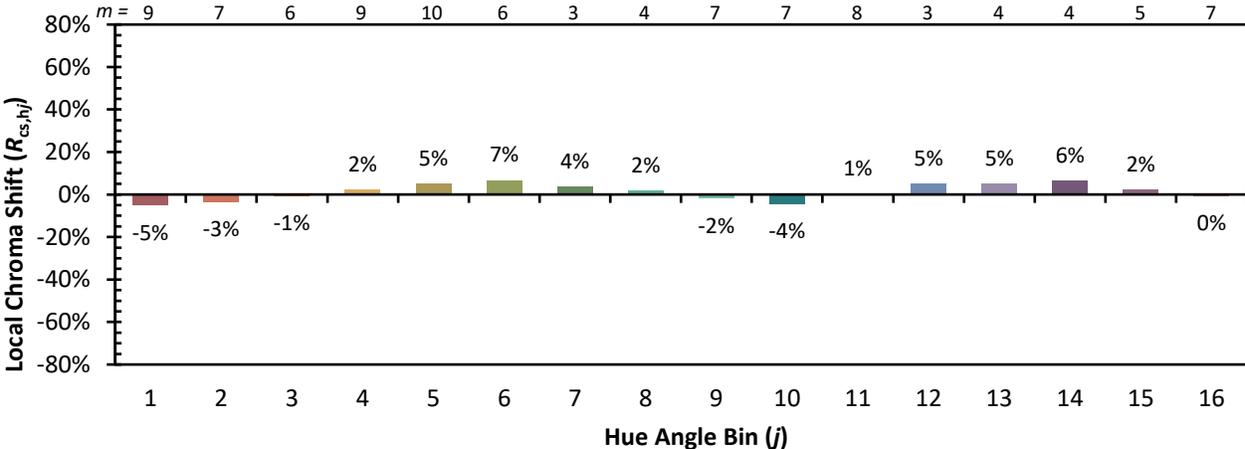

Measure Comparisons

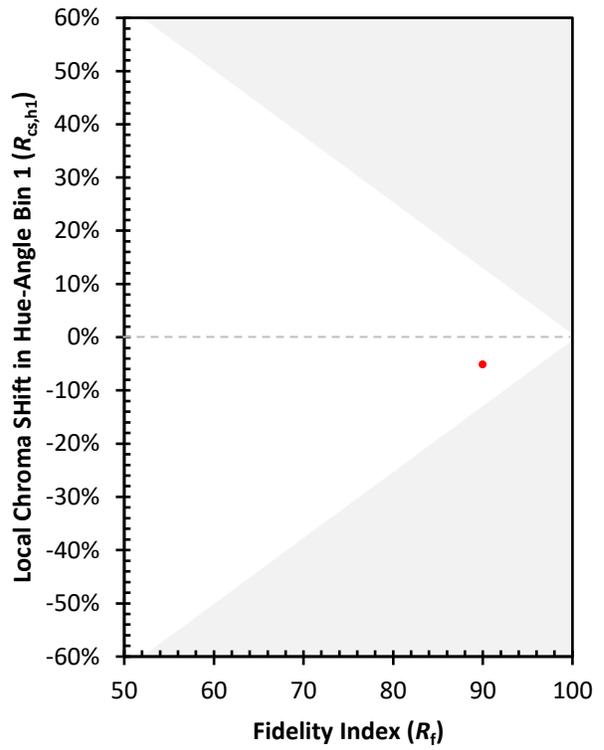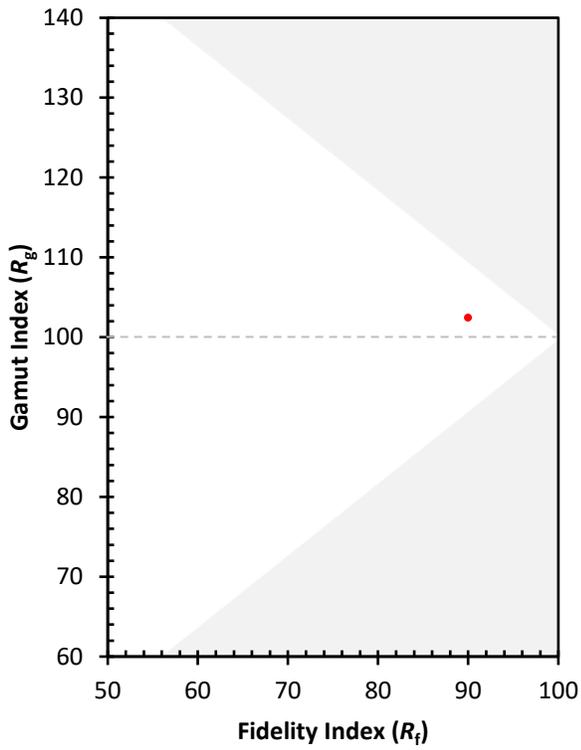

(END OF REPORT)