

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: FAIL-SAFE

Report Number: P1357559

Luminaire Tested: 8ASL4-5-1-G52-UNV

Issue Date: 2/17/2026

Test Information

Test Method: LM-79-2019
Report Number: P1357559
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2511-597-6)
Test Lab: INNOVATION CENTER
Issue Date: 2/17/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: FAIL-SAFE
Catalog Number: 8ASL4-5-1-G52-UNV
Description: 8FT 500 LUMEN PER FOOT 4ASL LED LUMINAIRE WITH OPL LENS AND G52 LEDS 1 ROW
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2004.0 lumens
Efficiency: N/A
Efficacy: 51.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.3 / 1.39
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 7.98' x H: 0.1')
CIE Type: Direct

Input Watts (W): 38.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1357559
CATALOG NUMBER: 8ASL4-5-1-G52-UNV

Luminous Intensity Polar Plot

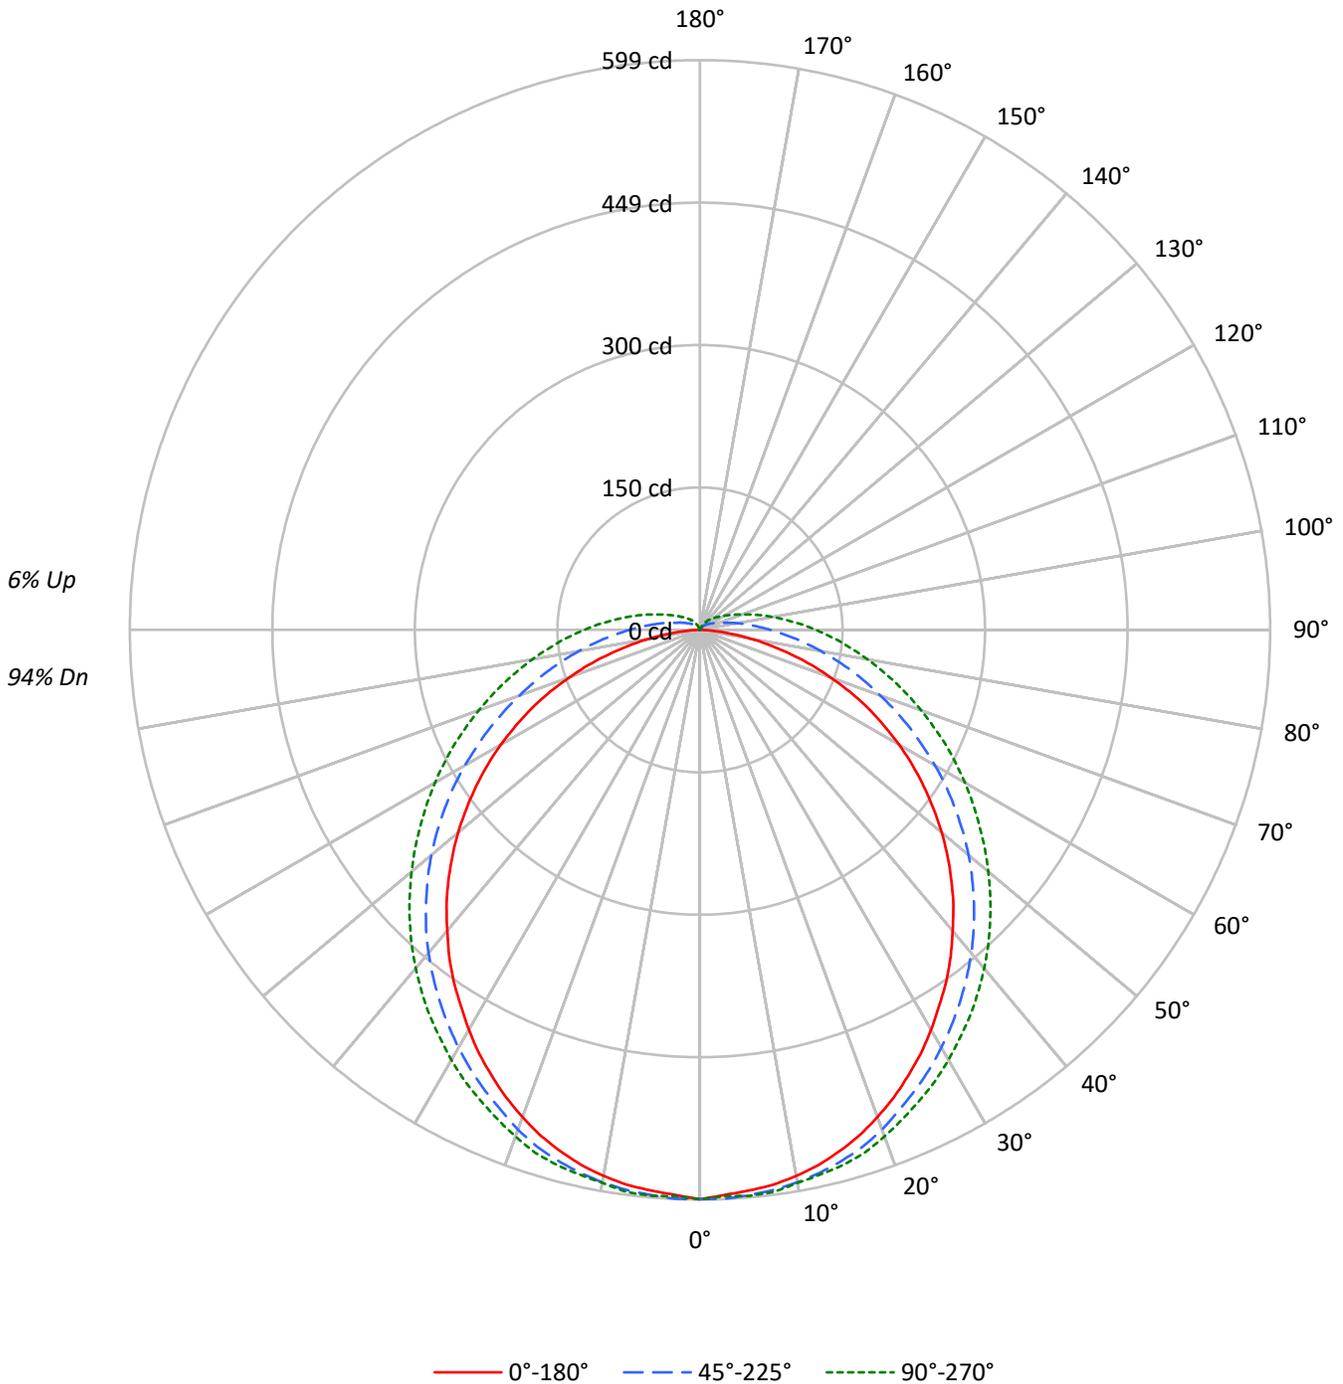



TEST NUMBER: P1357559
 CATALOG NUMBER: 8ASL4-5-1-G52-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	118	118	118	118	114	114	114	114	108	108	108	102	102	102	96	96	96	96	96	96	94
1	106	100	95	91	102	97	93	89	92	88	85	87	84	81	82	80	78	78	78	78	75
2	95	86	79	73	92	84	77	71	79	74	69	75	70	66	71	67	64	64	64	64	61
3	87	76	67	60	84	73	65	59	69	63	57	66	60	55	62	58	54	54	54	54	51
4	79	67	57	50	76	65	56	50	62	54	48	58	52	47	56	50	46	46	46	46	43
5	73	59	50	43	70	58	49	43	55	47	42	52	46	41	50	44	40	40	40	40	37
6	67	53	44	38	65	52	43	37	50	42	36	47	41	35	45	39	35	35	35	35	32
7	62	48	39	33	60	47	39	33	45	37	32	43	36	31	41	35	31	31	31	31	29
8	58	44	35	29	56	43	35	29	41	34	29	39	33	28	38	32	27	27	27	27	25
9	54	40	32	26	52	39	32	26	38	31	26	36	30	25	35	29	25	25	25	25	23
10	51	37	29	24	49	36	29	24	35	28	23	34	27	23	32	27	22	22	22	22	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2423	2423	2423
5°	2401	2375	2362
10°	2390	2329	2300
15°	2369	2279	2251
20°	2337	2223	2192
25°	2296	2155	2127
30°	2252	2092	2067
35°	2208	2028	2007
40°	2158	1964	1944
45°	2112	1894	1881
50°	2057	1820	1814
55°	1989	1737	1747
60°	1913	1650	1689
65°	1816	1559	1631
70°	1663	1463	1574
75°	1464	1379	1530
80°	1189	1307	1503
85°	739	1265	1513

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2112 cd/sqm



TEST NUMBER: P1357559
 CATALOG NUMBER: 8ASL4-5-1-G52-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.7	2.8
10°-20°	162.7	8.1
20°-30°	246.0	12.3
30°-40°	297.4	14.8
40°-50°	312.7	15.6
50°-60°	291.3	14.5
60°-70°	239.3	11.9
70°-80°	169.9	8.5
80°-90°	102.4	5.1
90°-100°	57.4	2.9
100°-110°	31.8	1.6
110°-120°	17.7	0.9
120°-130°	10.2	0.5
130°-140°	5.6	0.3
140°-150°	2.5	0.1
150°-160°	0.6	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	465.4	23.2
0°-40°	762.8	38.1
0°-60°	1366.7	68.2
0°-90°	1878.3	93.7
90°-120°	106.9	5.3
90°-150°	125.1	6.2
90°-180°	126.0	6.3
0°-180°	2004.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	599	599	599	599	599	
5°	592	597	596	596	597	56
15°	567	575	578	580	582	160
25°	517	527	534	542	546	238
35°	451	462	477	489	495	282
45°	374	387	407	424	431	288
55°	287	303	327	349	358	257
65°	195	213	243	272	284	192
75°	98	123	164	198	212	105
85°	18	53	99	135	149	23
90°	0	31	74	108	121	1
95°	0	18	54	85	98	0
105°	0	7	28	52	61	0
115°	0	3	18	31	37	0
125°	0	2	11	20	24	0
135°	0	1	7	13	16	0
145°	1	0	3	7	10	0
155°	1	1	0	2	3	0
165°	0	0	0	0	0	0
175°	0	0	0	0	0	0
180°	0	0	0	0	0	0



TEST NUMBER: P1357559
 CATALOG NUMBER: 8ASL4-5-1-G52-UNV

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	598.6	598.6	598.6	598.6	598.6
2.5°	594.5	599.9	598.6	595.9	595.9
5°	591.8	597.2	596.5	595.9	597.2
7.5°	588.4	593.8	593.8	594.5	595.9
10°	583.0	589.8	589.8	589.8	590.5
12.5°	576.2	583.0	584.4	585.0	586.4
15°	567.4	574.9	577.6	580.3	582.3
17.5°	557.3	564.7	569.5	572.8	576.2
20°	545.1	553.2	559.3	563.4	566.8
22.5°	532.2	540.3	546.4	552.5	556.6
25°	517.3	526.8	534.3	541.7	545.8
27.5°	502.4	511.9	521.4	530.2	534.9
30°	485.5	496.3	507.2	517.3	522.1
32.5°	467.9	479.4	492.3	503.1	508.5
35°	451.0	462.5	476.7	488.9	495.0
37.5°	432.7	444.2	460.4	474.0	480.1
40°	413.0	425.9	443.5	457.7	464.5
42.5°	394.1	407.0	425.9	441.5	448.3
45°	373.8	387.3	407.0	423.9	431.3
47.5°	352.8	367.0	388.0	405.6	413.7
50°	331.8	346.7	368.4	387.3	395.4
52.5°	309.4	325.0	348.0	368.4	377.2
55°	287.1	303.4	327.1	348.7	358.2
57.5°	264.8	281.0	306.7	329.8	339.9
60°	241.7	258.7	285.1	310.1	321.6
62.5°	218.0	235.6	263.4	290.5	302.7
65°	195.0	212.6	243.1	271.5	284.4
67.5°	170.6	189.6	222.1	251.9	265.4
70°	145.6	167.2	201.8	233.6	247.2
72.5°	123.2	145.6	182.8	215.3	229.5
75°	98.2	123.2	163.9	197.7	211.9
77.5°	76.5	103.6	146.3	180.8	195.0
80°	54.8	84.6	129.3	164.5	178.8
82.5°	35.2	67.7	113.8	149.6	163.2
85°	18.3	52.8	98.9	135.4	149.0
87.5°	5.4	40.6	85.3	121.2	134.7
90°	0.0	31.1	73.8	108.3	121.2
92.5°	0.0	23.7	63.6	96.8	109.7
95°	0.0	18.3	54.2	85.3	97.5
97.5°	0.0	14.2	46.7	75.2	87.3
100°	0.0	11.5	40.0	66.4	77.9
102.5°	0.0	9.5	34.5	58.9	69.1
105°	0.0	6.8	28.4	51.5	60.9
107.5°	0.0	4.7	25.1	45.4	53.5
110°	0.0	4.1	22.3	39.3	47.4



TEST NUMBER: P1357559
 CATALOG NUMBER: 8ASL4-5-1-G52-UNV

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	0.0	3.4	19.6	35.2	42.0
115°	0.0	3.4	17.6	31.1	37.2
117.5°	0.0	2.7	14.9	27.8	33.2
120°	0.0	2.7	13.5	25.1	29.8
122.5°	0.0	2.0	12.2	22.3	27.1
125°	0.0	2.0	10.8	20.3	23.7
127.5°	0.0	1.4	9.5	18.3	21.7
130°	0.0	1.4	8.8	16.3	19.6
132.5°	0.0	0.7	8.1	14.9	17.6
135°	0.0	0.7	6.8	12.9	16.3
137.5°	0.0	0.0	6.1	11.5	14.2
140°	0.0	0.0	4.7	10.2	12.9
142.5°	0.7	0.0	4.1	8.8	10.8
145°	0.7	0.0	2.7	7.4	9.5
147.5°	0.7	0.7	2.0	6.1	7.4
150°	0.7	0.7	1.4	4.1	6.1
152.5°	0.7	0.7	0.7	2.7	4.1
155°	0.7	0.7	0.0	2.0	2.7
157.5°	0.7	0.7	0.0	0.7	1.4
160°	0.7	0.7	0.0	0.0	0.7
162.5°	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1357559
 CATALOG NUMBER: 8ASL4-5-1-G52-UNV

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.49	14.05	12.95	14.49	14.96	14.52	16.07	14.98	16.51	16.98
	3H	13.98	15.40	14.46	15.85	16.36	16.95	18.36	17.42	18.82	19.32
	4H	14.46	15.80	14.95	16.27	16.79	18.13	19.47	18.62	19.94	20.46
	6H	14.74	15.98	15.24	16.47	17.01	19.36	20.61	19.87	21.10	21.64
	8H	14.79	15.98	15.31	16.49	17.04	20.01	21.20	20.53	21.71	22.26
	12H	14.80	15.95	15.33	16.45	17.03	20.73	21.87	21.25	22.37	22.95
4H	2H	13.37	14.71	13.86	15.18	15.70	14.95	16.29	15.45	16.76	17.29
	3H	15.09	16.24	15.60	16.75	17.30	17.60	18.74	18.11	19.26	19.80
	4H	15.69	16.74	16.22	17.26	17.84	18.95	20.00	19.48	20.52	21.10
	6H	16.09	17.01	16.63	17.56	18.15	20.38	21.30	20.92	21.85	22.44
	8H	16.18	17.05	16.73	17.60	18.20	21.12	21.99	21.67	22.54	23.15
	12H	16.22	17.01	16.80	17.59	18.20	21.97	22.75	22.54	23.33	23.94
8H	4H	16.35	17.22	16.90	17.77	18.38	19.16	20.03	19.72	20.58	21.19
	6H	16.92	17.66	17.51	18.25	18.86	20.75	21.49	21.34	22.08	22.69
	8H	17.10	17.76	17.69	18.37	18.99	21.64	22.30	22.23	22.90	23.53
	12H	17.21	17.80	17.80	18.39	19.08	22.66	23.25	23.26	23.85	24.54
12H	4H	16.54	17.33	17.11	17.91	18.52	19.17	19.96	19.74	20.54	21.15
	6H	17.20	17.87	17.80	18.47	19.09	20.79	21.45	21.38	22.06	22.68
	8H	17.47	18.06	18.07	18.66	19.35	21.74	22.33	22.34	22.92	23.61

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Fail-Safe

Report Number: SP1-2511-597-8

Test Date: 01/22/2026

Luminaire Tested: 4ASL-2-G520-UNV-OPL-1_600mA

Data in this report applies to families of products including 4ASL


Test Information

Test Method: LM-79-2019
 Report Number: SP1-2511-597-8
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 01/29/2026
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Fail-Safe
 Catalog Number: **4ASL-2-G520-UNV-OPL-1_600mA**
 Description: 2foot 4ASL LED LUMINAIRE WITH OPL LENS AND GREEN 520NM LEDS with 1 rows at 600mA

Spectral Parameters

CCT (K): 7535
 CIE u': 0.0718
 CIE v': 0.5710
 Duv: 0.1461
 CIE x: 0.1962
 CIE y: 0.6931
 CIE z: 0.1107
 Peak Wavelength (nm): 524
 Dominant Wavelength (nm): 529
 Purity: 75.95236
 Rf: NR
 Rg: NR

CRI (Ra):	-11.7		
R1:	-30.6	R9:	-351.9
R2:	5.1	R10:	-75.5
R3:	5.6	R11:	-78.0
R4:	-51.7	R12:	-14.7
R5:	-6.4	R13:	-32.5
R6:	-0.6	R14:	52.7
R7:	10.9	R15:	-37.0
R8:	-25.8		

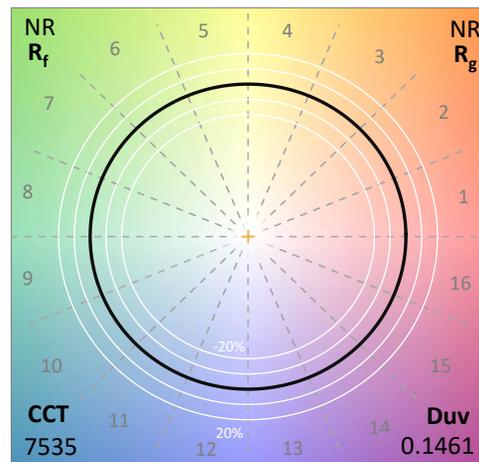

Test Conditions

Stabilization Time: 48M
 Operation Time: 1H 48M
 Sphere Temperature (°C): 25.1

REPORT NUMBER: SP1-2511-597-8

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	12/16/2025	6/16/2026
Power Meter	XITRON INXT2011004	10/21/2025	10/21/2026
AC Power Source	CHROMA 61603 IN0063	10/21/2025	10/21/2026
DC Power Source	AGILENT E3634A IN0208	10/21/2025	10/21/2026
Sphere Thermometer	ONSET IN0085	10/21/2025	10/21/2026
Room Thermometer	ONSET IN0046	10/21/2025	10/21/2026

REPORT NUMBER: SP1-2511-597-8

CIE 1931 Chromaticity Diagram




CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies outside the range

REPORT NUMBER: SP1-2511-597-8

Photopic Flux vs. Wavelength

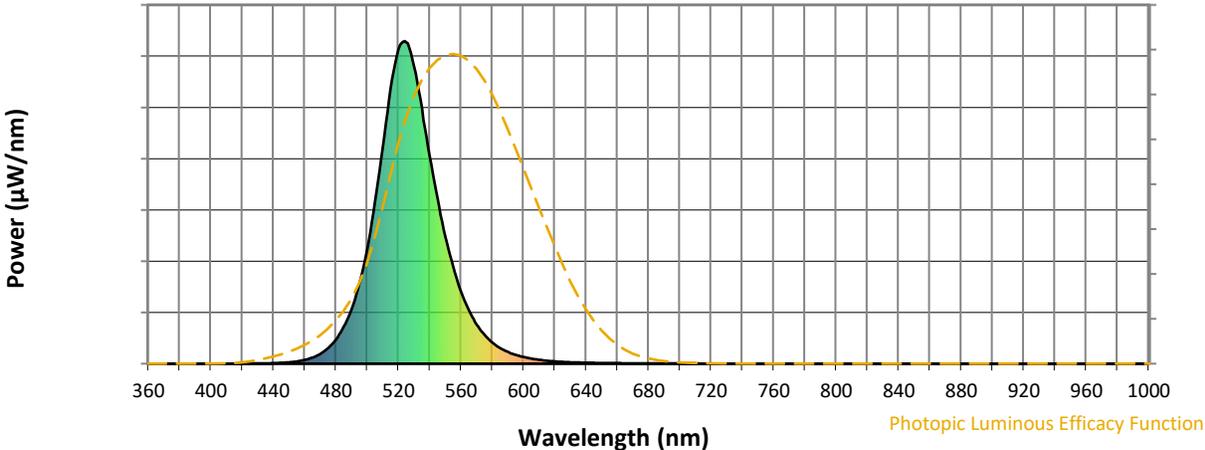

Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	169	NR	620	7	NR	750	0	NR	880	0	NR
365	0	NR	495	249	NR	625	6	NR	755	0	NR	885	0	NR
370	0	NR	500	356	NR	630	4	NR	760	0	NR	890	0	NR
375	0	NR	505	502	NR	635	4	NR	765	0	NR	895	0	NR
380	0	NR	510	674	NR	640	3	NR	770	0	NR	900	0	NR
385	0	NR	515	853	NR	645	3	NR	775	0	NR	905	0	NR
390	0	NR	520	976	NR	650	2	NR	780	0	NR	910	0	NR
395	0	NR	525	996	NR	655	2	NR	785	0	NR	915	0	NR
400	0	NR	530	920	NR	660	2	NR	790	0	NR	920	0	NR
405	0	NR	535	792	NR	665	1	NR	795	0	NR	925	0	NR
410	0	NR	540	642	NR	670	1	NR	800	0	NR	930	0	NR
415	0	NR	545	511	NR	675	1	NR	805	0	NR	935	0	NR
420	0	NR	550	394	NR	680	1	NR	810	0	NR	940	0	NR
425	1	NR	555	300	NR	685	1	NR	815	0	NR	945	0	NR
430	1	NR	560	224	NR	690	1	NR	820	0	NR	950	0	NR
435	1	NR	565	166	NR	695	1	NR	825	0	NR	955	0	NR
440	2	NR	570	122	NR	700	1	NR	830	0	NR	960	0	NR
445	3	NR	575	90	NR	705	1	NR	835	0	NR	965	0	NR
450	4	NR	580	66	NR	710	1	NR	840	0	NR	970	0	NR
455	7	NR	585	48	NR	715	0	NR	845	0	NR	975	0	NR
460	12	NR	590	36	NR	720	0	NR	850	0	NR	980	0	NR
465	19	NR	595	27	NR	725	0	NR	855	0	NR	985	0	NR
470	31	NR	600	21	NR	730	0	NR	860	0	NR	990	0	NR
475	49	NR	605	16	NR	735	0	NR	865	0	NR	995	0	NR
480	75	NR	610	12	NR	740	0	NR	870	0	NR	1000	0	NR
485	115	NR	615	9	NR	745	0	NR	875	0	NR			

REPORT NUMBER: SP1-2511-597-8

Scotopic Flux vs. Wavelength




Scotopic Lumens: NR

S/P: 2.63

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	169	NR	620	7	NR	750	0	NR	880	0	NR
365	0	NR	495	249	NR	625	6	NR	755	0	NR	885	0	NR
370	0	NR	500	356	NR	630	4	NR	760	0	NR	890	0	NR
375	0	NR	505	502	NR	635	4	NR	765	0	NR	895	0	NR
380	0	NR	510	674	NR	640	3	NR	770	0	NR	900	0	NR
385	0	NR	515	853	NR	645	3	NR	775	0	NR	905	0	NR
390	0	NR	520	976	NR	650	2	NR	780	0	NR	910	0	NR
395	0	NR	525	996	NR	655	2	NR	785	0	NR	915	0	NR
400	0	NR	530	920	NR	660	2	NR	790	0	NR	920	0	NR
405	0	NR	535	792	NR	665	1	NR	795	0	NR	925	0	NR
410	0	NR	540	642	NR	670	1	NR	800	0	NR	930	0	NR
415	0	NR	545	511	NR	675	1	NR	805	0	NR	935	0	NR
420	0	NR	550	394	NR	680	1	NR	810	0	NR	940	0	NR
425	1	NR	555	300	NR	685	1	NR	815	0	NR	945	0	NR
430	1	NR	560	224	NR	690	1	NR	820	0	NR	950	0	NR
435	1	NR	565	166	NR	695	1	NR	825	0	NR	955	0	NR
440	2	NR	570	122	NR	700	1	NR	830	0	NR	960	0	NR
445	3	NR	575	90	NR	705	1	NR	835	0	NR	965	0	NR
450	4	NR	580	66	NR	710	1	NR	840	0	NR	970	0	NR
455	7	NR	585	48	NR	715	0	NR	845	0	NR	975	0	NR
460	12	NR	590	36	NR	720	0	NR	850	0	NR	980	0	NR
465	19	NR	595	27	NR	725	0	NR	855	0	NR	985	0	NR
470	31	NR	600	21	NR	730	0	NR	860	0	NR	990	0	NR
475	49	NR	605	16	NR	735	0	NR	865	0	NR	995	0	NR
480	75	NR	610	12	NR	740	0	NR	870	0	NR	1000	0	NR
485	115	NR	615	9	NR	745	0	NR	875	0	NR			

REPORT NUMBER: SP1-2511-597-8

Melanopic Flux vs. Wavelength

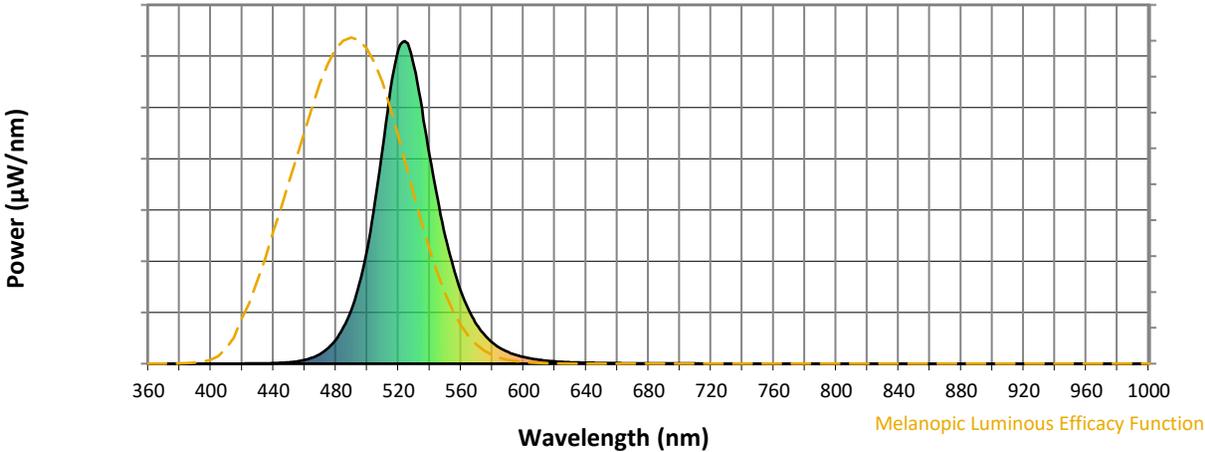

Melanopic Lumens: NR


M/P: 4.87

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	169	NR	620	7	NR	750	0	NR	880	0	NR
365	0	NR	495	249	NR	625	6	NR	755	0	NR	885	0	NR
370	0	NR	500	356	NR	630	4	NR	760	0	NR	890	0	NR
375	0	NR	505	502	NR	635	4	NR	765	0	NR	895	0	NR
380	0	NR	510	674	NR	640	3	NR	770	0	NR	900	0	NR
385	0	NR	515	853	NR	645	3	NR	775	0	NR	905	0	NR
390	0	NR	520	976	NR	650	2	NR	780	0	NR	910	0	NR
395	0	NR	525	996	NR	655	2	NR	785	0	NR	915	0	NR
400	0	NR	530	920	NR	660	2	NR	790	0	NR	920	0	NR
405	0	NR	535	792	NR	665	1	NR	795	0	NR	925	0	NR
410	0	NR	540	642	NR	670	1	NR	800	0	NR	930	0	NR
415	0	NR	545	511	NR	675	1	NR	805	0	NR	935	0	NR
420	0	NR	550	394	NR	680	1	NR	810	0	NR	940	0	NR
425	1	NR	555	300	NR	685	1	NR	815	0	NR	945	0	NR
430	1	NR	560	224	NR	690	1	NR	820	0	NR	950	0	NR
435	1	NR	565	166	NR	695	1	NR	825	0	NR	955	0	NR
440	2	NR	570	122	NR	700	1	NR	830	0	NR	960	0	NR
445	3	NR	575	90	NR	705	1	NR	835	0	NR	965	0	NR
450	4	NR	580	66	NR	710	1	NR	840	0	NR	970	0	NR
455	7	NR	585	48	NR	715	0	NR	845	0	NR	975	0	NR
460	12	NR	590	36	NR	720	0	NR	850	0	NR	980	0	NR
465	19	NR	595	27	NR	725	0	NR	855	0	NR	985	0	NR
470	31	NR	600	21	NR	730	0	NR	860	0	NR	990	0	NR
475	49	NR	605	16	NR	735	0	NR	865	0	NR	995	0	NR
480	75	NR	610	12	NR	740	0	NR	870	0	NR	1000	0	NR
485	115	NR	615	9	NR	745	0	NR	875	0	NR			





Summary

$R_f = 0$
 $R_g = 0$
 $CIE R_a = -11.7$
 $R_g = -351.9$

Spectral Power Distribution Comparison

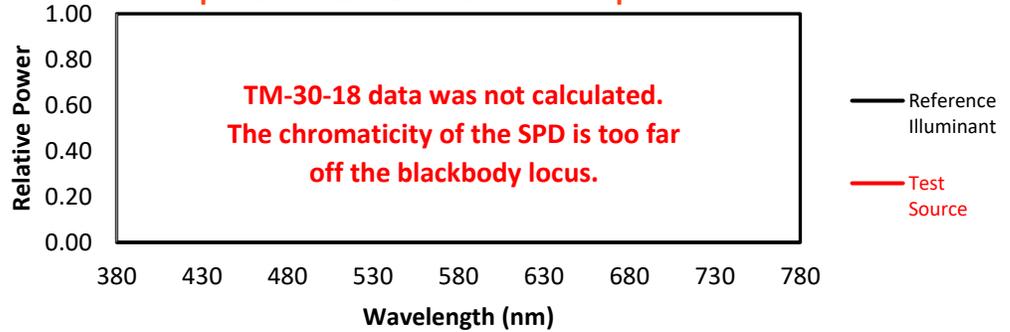

Color Vector Graphics

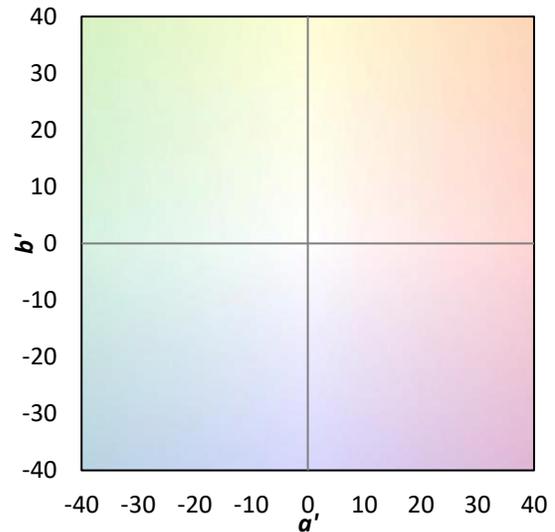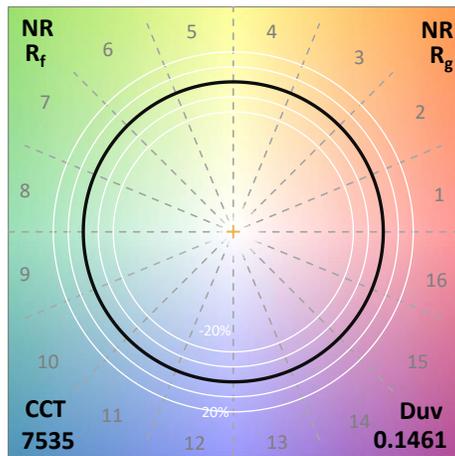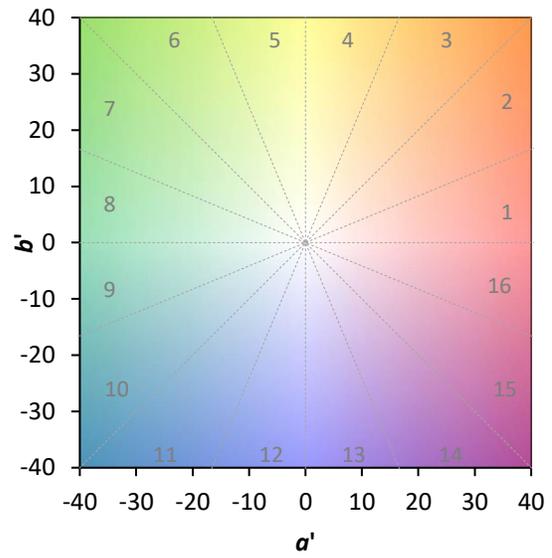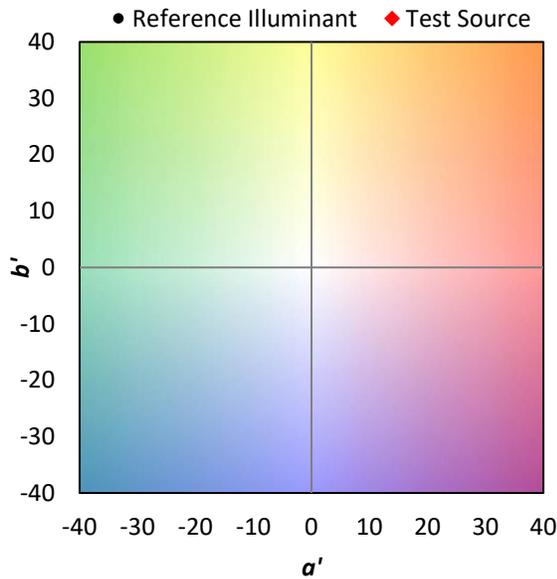


Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 0	CES26 = 0	CES51 = 0	CES76 = 0
CES02 = 0	CES27 = 0	CES52 = 0	CES77 = 0
CES03 = 0	CES28 = 0	CES53 = 0	CES78 = 0
CES04 = 0	CES29 = 0	CES54 = 0	CES79 = 0
CES05 = 0	CES30 = 0	CES55 = 0	CES80 = 0
CES06 = 0	CES31 = 0	CES56 = 0	CES81 = 0
CES07 = 0	CES32 = 0	CES57 = 0	CES82 = 0
CES08 = 0	CES33 = 0	CES58 = 0	CES83 = 0
CES09 = 0	CES34 = 0	CES59 = 0	CES84 = 0
CES10 = 0	CES35 = 0	CES60 = 0	CES85 = 0
CES11 = 0	CES36 = 0	CES61 = 0	CES86 = 0
CES12 = 0	CES37 = 0	CES62 = 0	CES87 = 0
CES13 = 0	CES38 = 0	CES63 = 0	CES88 = 0
CES14 = 0	CES39 = 0	CES64 = 0	CES89 = 0
CES15 = 0	CES40 = 0	CES65 = 0	CES90 = 0
CES16 = 0	CES41 = 0	CES66 = 0	CES91 = 0
CES17 = 0	CES42 = 0	CES67 = 0	CES92 = 0
CES18 = 0	CES43 = 0	CES68 = 0	CES93 = 0
CES19 = 0	CES44 = 0	CES69 = 0	CES94 = 0
CES20 = 0	CES45 = 0	CES70 = 0	CES95 = 0
CES21 = 0	CES46 = 0	CES71 = 0	CES96 = 0
CES22 = 0	CES47 = 0	CES72 = 0	CES97 = 0
CES23 = 0	CES48 = 0	CES73 = 0	CES98 = 0
CES24 = 0	CES49 = 0	CES74 = 0	CES99 = 0
CES25 = 0	CES50 = 0	CES75 = 0	



Color Rendition by Hue-Angle Bin

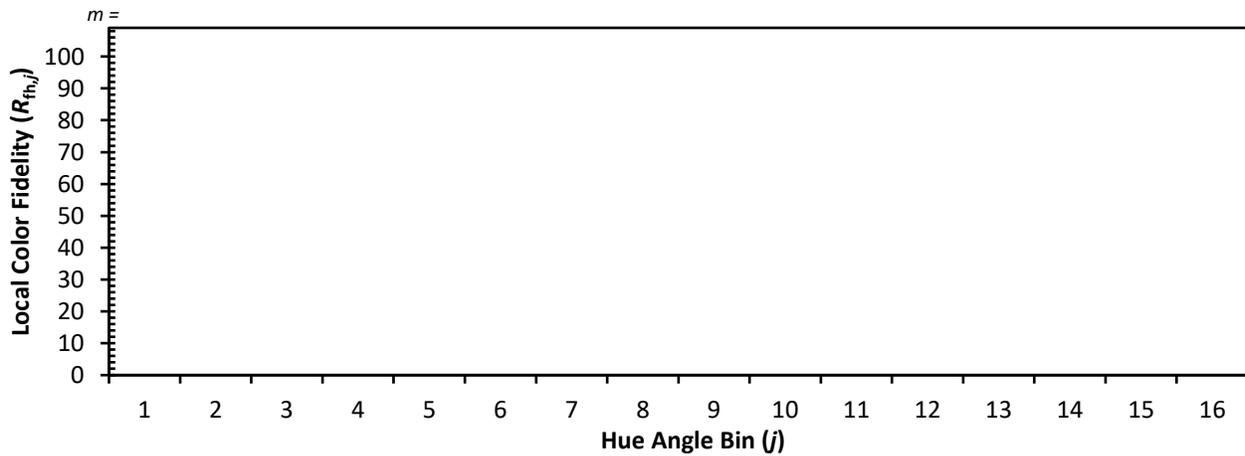

Measure Comparisons

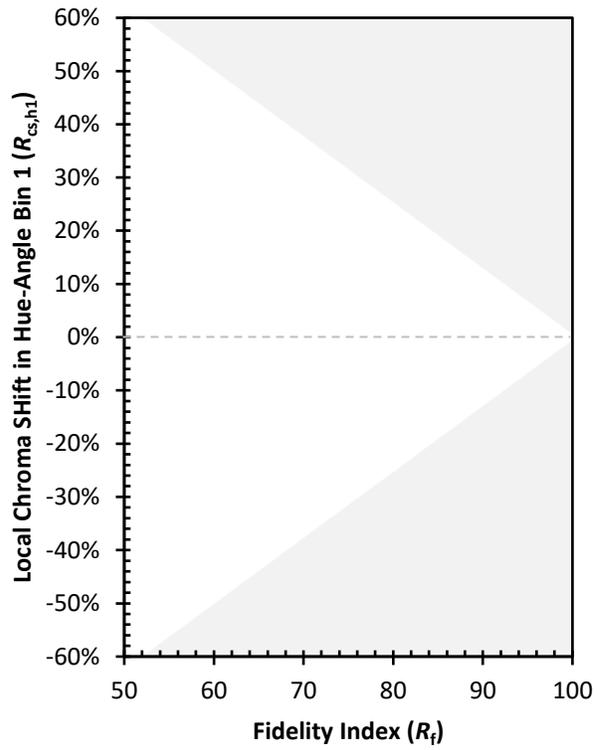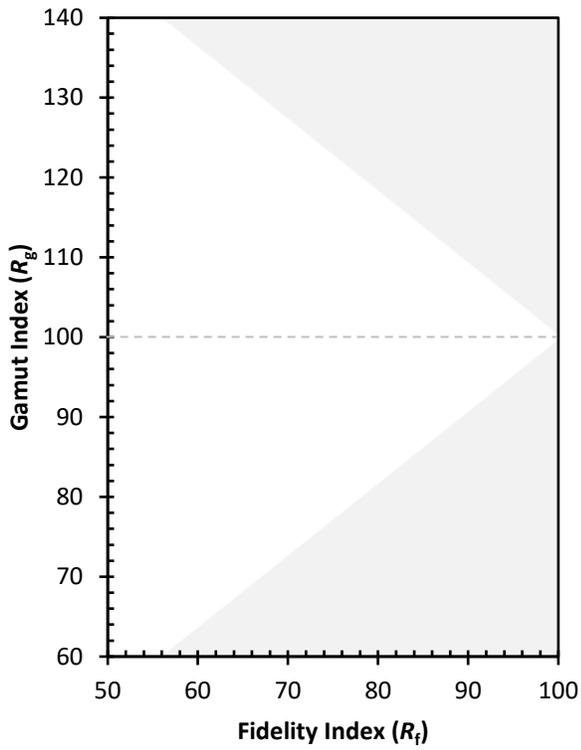

(END OF REPORT)