

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: FAIL-SAFE

Report Number: P1357541

Luminaire Tested: 8ASL4-35VHE-3-50-UNV

Issue Date: 2/17/2026

Test Information

Test Method: LM-79-2019
Report Number: P1357541
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2511-597-12)
Test Lab: INNOVATION CENTER
Issue Date: 2/17/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: FAIL-SAFE
Catalog Number: 8ASL4-35VHE-3-50-UNV
Description: 8FT 3500 LUMEN PER FOOT 4ASL LED LUMINAIRE WITH OPL LENS AND 5000K LEDS 3 ROW
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 28552.0 lumens
Efficiency: N/A
Efficacy: 112.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.3 / 1.39
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 7.98' x H: 0.1')
CIE Type: Direct

Input Watts (W): 252.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1357541
CATALOG NUMBER: 8ASL4-35VHE-3-50-UNV

Luminous Intensity Polar Plot

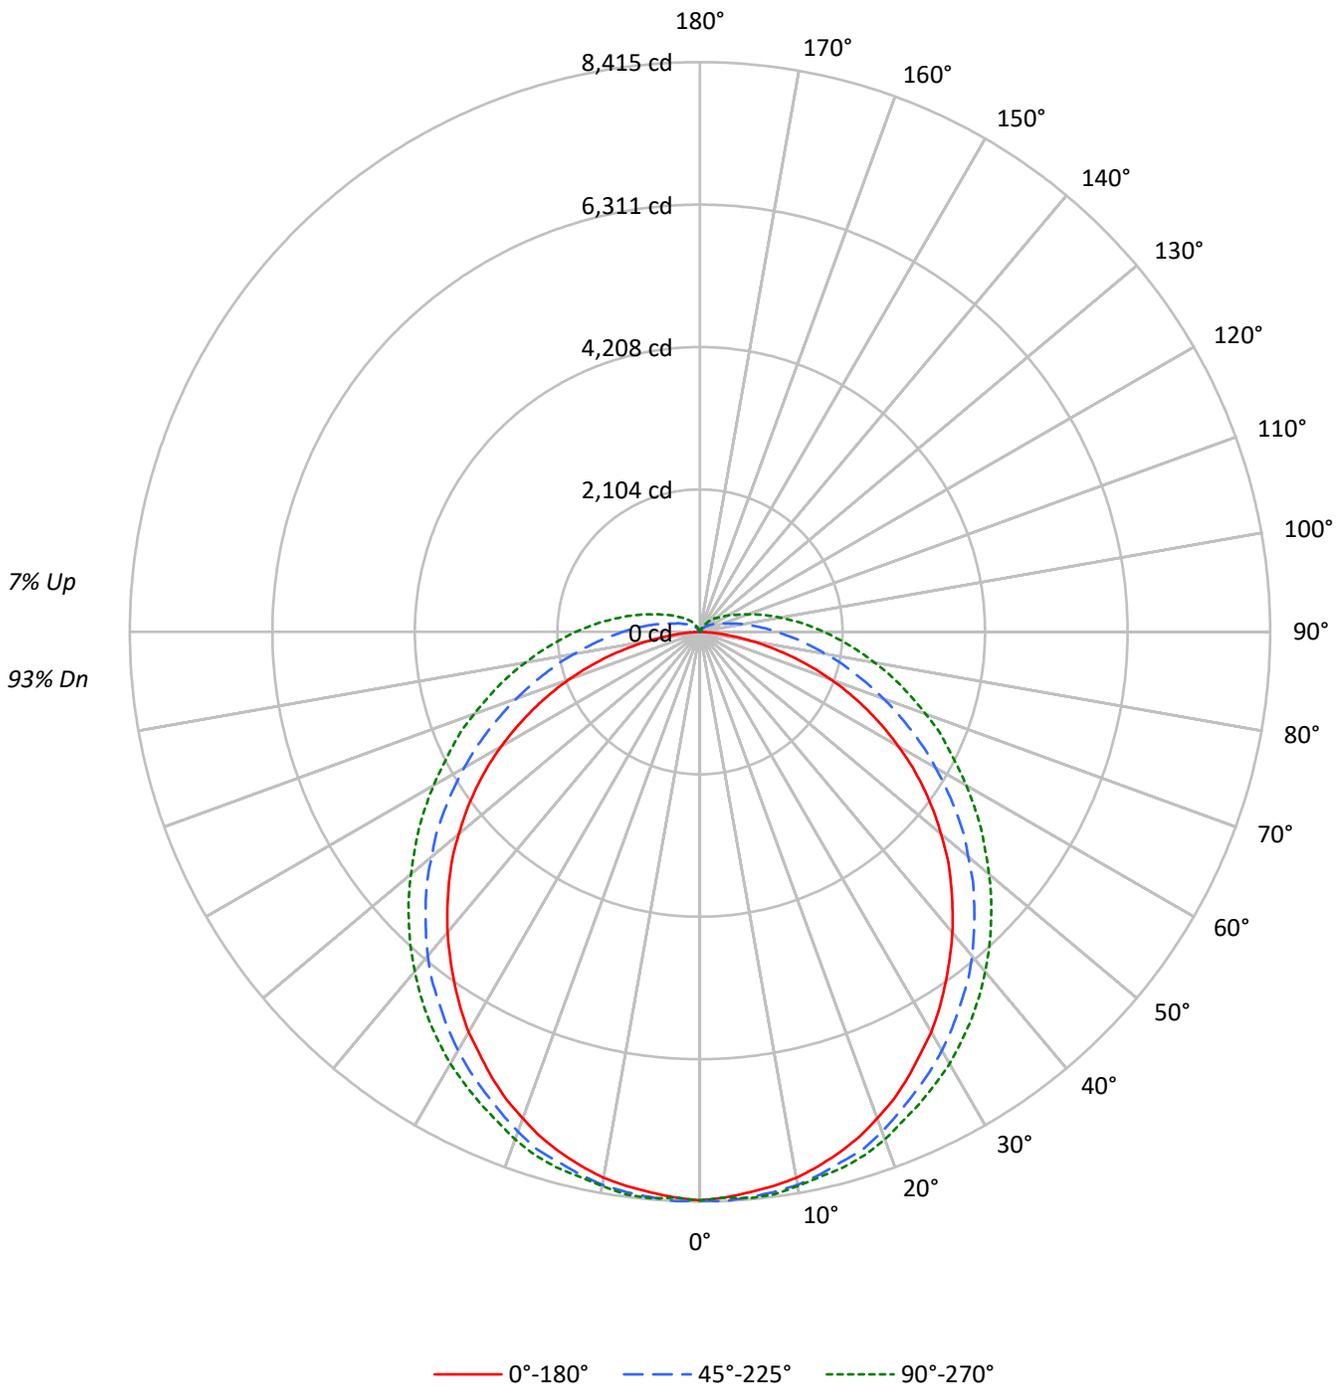



TEST NUMBER: P1357541
 CATALOG NUMBER: 8ASL4-35VHE-3-50-UNV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	117	117	117	117	114	114	114	114	107	107	107	101	101	101	96	96	96	96	96	96	93
1	105	100	95	91	102	97	92	88	91	88	84	86	83	80	81	79	77	77	77	77	74
2	95	86	79	72	92	84	77	71	79	73	68	75	70	66	71	67	63	63	63	63	61
3	86	75	67	60	83	73	65	59	69	62	57	65	60	55	62	57	53	53	53	53	50
4	79	66	57	50	76	65	56	49	61	54	48	58	52	47	55	50	45	45	45	45	43
5	73	59	50	43	70	58	49	42	55	47	41	52	45	40	49	44	39	39	39	39	37
6	67	53	44	37	64	52	43	37	49	42	36	47	40	35	45	39	34	34	34	34	32
7	62	48	39	33	60	47	38	32	45	37	32	43	36	31	41	35	30	30	30	30	28
8	58	44	35	29	56	43	35	29	41	34	28	39	32	28	37	32	27	27	27	27	25
9	54	40	32	26	52	39	31	26	38	30	25	36	30	25	35	29	24	24	24	24	22
10	50	37	29	24	49	36	29	23	35	28	23	33	27	23	32	26	22	22	22	22	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	33985	33985	33985
5°	33722	33372	33207
10°	33571	32750	32367
15°	33239	31968	31655
20°	32777	31220	30852
25°	32235	30273	29939
30°	31662	29454	29167
35°	30941	28524	28308
40°	30290	27674	27402
45°	29590	26641	26493
50°	28791	25532	25549
55°	27935	24474	24700
60°	26808	23236	23838
65°	25370	22050	23123
70°	23533	20880	22564
75°	20825	19823	22179
80°	16670	19060	22016
85°	10582	18977	22342

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 29590 cd/sqm



TEST NUMBER: P1357541
 CATALOG NUMBER: 8ASL4-35VHE-3-50-UNV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	796.3	2.8
10°-20°	2286.3	8.0
20°-30°	3456.8	12.1
30°-40°	4185.6	14.7
40°-50°	4396.2	15.4
50°-60°	4101.4	14.4
60°-70°	3389.6	11.9
70°-80°	2440.6	8.5
80°-90°	1516.6	5.3
90°-100°	888.7	3.1
100°-110°	508.3	1.8
110°-120°	287.0	1.0
120°-130°	165.2	0.6
130°-140°	89.0	0.3
140°-150°	37.5	0.1
150°-160°	6.9	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6539.4	22.9
0°-40°	10725.0	37.6
0°-60°	19222.6	67.3
0°-90°	26569.4	93.1
90°-120°	1684.0	5.9
90°-150°	1975.7	6.9
90°-180°	1983.0	6.9
0°-180°	28552.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	8398	8398	8398	8398	8398	
5°	8310	8380	8380	8380	8398	790
15°	7961	8066	8101	8153	8188	2245
25°	7263	7385	7507	7612	7682	3345
35°	6320	6495	6704	6896	6983	3956
45°	5238	5430	5726	5971	6076	4041
55°	4033	4260	4609	4941	5063	3603
65°	2724	2985	3439	3876	4033	2695
75°	1397	1746	2357	2863	3073	1477
85°	262	786	1484	2008	2200	320
90°	0	471	1135	1624	1833	12
95°	0	297	856	1309	1501	0
105°	0	105	471	820	960	0
115°	0	52	279	506	594	0
125°	0	35	175	332	384	0
135°	0	0	105	210	262	0
145°	0	0	52	122	140	0
155°	0	0	0	35	52	0
165°	0	0	0	0	0	0
175°	0	0	0	0	0	0
180°	0	0	0	0	0	0



TEST NUMBER: P1357541

CATALOG NUMBER: 8ASL4-35VHE-3-50-UNV

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	8397.5	8397.5	8397.5	8397.5	8397.5
2.5°	8362.6	8415.0	8415.0	8362.6	8362.6
5°	8310.2	8380.1	8380.1	8380.1	8397.5
7.5°	8257.9	8345.2	8345.2	8345.2	8380.1
10°	8188.0	8275.3	8292.8	8292.8	8310.2
12.5°	8083.3	8188.0	8205.5	8222.9	8240.4
15°	7961.1	8065.8	8100.7	8153.1	8188.0
17.5°	7821.4	7943.6	8013.4	8065.8	8100.7
20°	7646.8	7769.0	7856.3	7926.1	7978.5
22.5°	7472.2	7577.0	7681.7	7769.0	7821.4
25°	7262.7	7384.9	7507.1	7611.9	7681.7
27.5°	7035.8	7175.4	7332.6	7454.8	7524.6
30°	6826.3	6965.9	7140.5	7297.6	7367.5
32.5°	6581.8	6739.0	6931.0	7088.1	7175.4
35°	6320.0	6494.6	6704.1	6896.1	6983.4
37.5°	6058.1	6232.7	6494.6	6686.6	6773.9
40°	5796.2	5970.8	6250.1	6459.6	6546.9
42.5°	5516.9	5691.5	5988.3	6215.2	6320.0
45°	5237.5	5429.6	5726.4	5970.8	6075.5
47.5°	4958.2	5150.3	5464.5	5726.4	5831.1
50°	4644.0	4853.5	5167.7	5464.5	5569.3
52.5°	4347.2	4556.7	4905.8	5202.6	5307.4
55°	4032.9	4259.9	4609.0	4940.7	5063.0
57.5°	3718.7	3945.6	4312.2	4661.4	4801.1
60°	3386.9	3631.4	4015.4	4382.1	4539.2
62.5°	3055.2	3317.1	3736.1	4120.2	4277.3
65°	2723.5	2985.4	3439.3	3875.8	4032.9
67.5°	2391.8	2671.1	3160.0	3613.9	3805.9
70°	2060.1	2356.9	2880.6	3352.0	3544.1
72.5°	1728.4	2042.6	2618.8	3107.6	3299.7
75°	1396.7	1745.8	2356.9	2863.2	3072.7
77.5°	1065.0	1466.5	2129.9	2636.2	2845.7
80°	768.2	1222.1	1885.5	2409.3	2618.8
82.5°	488.8	977.7	1676.0	2199.8	2409.3
85°	261.9	785.6	1484.0	2007.7	2199.8
87.5°	87.3	611.0	1291.9	1815.7	2007.7
90°	0.0	471.4	1134.8	1623.6	1833.1
92.5°	0.0	366.6	995.1	1466.5	1658.6
95°	0.0	296.8	855.5	1309.4	1501.4
97.5°	0.0	244.4	750.7	1169.7	1344.3
100°	0.0	192.0	646.0	1047.5	1204.6
102.5°	0.0	157.1	558.7	925.3	1082.4
105°	0.0	104.8	471.4	820.5	960.2
107.5°	0.0	87.3	401.5	733.3	855.5
110°	0.0	69.8	366.6	628.5	750.7



TEST NUMBER: P1357541
 CATALOG NUMBER: 8ASL4-35VHE-3-50-UNV

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	0.0	52.4	331.7	558.7	680.9
115°	0.0	52.4	279.3	506.3	593.6
117.5°	0.0	52.4	244.4	453.9	541.2
120°	0.0	34.9	227.0	401.5	488.8
122.5°	0.0	34.9	192.0	366.6	436.5
125°	0.0	34.9	174.6	331.7	384.1
127.5°	0.0	17.5	157.1	296.8	349.2
130°	0.0	17.5	139.7	261.9	314.3
132.5°	0.0	17.5	122.2	244.4	296.8
135°	0.0	0.0	104.8	209.5	261.9
137.5°	0.0	0.0	87.3	192.0	227.0
140°	0.0	0.0	69.8	157.1	209.5
142.5°	0.0	0.0	52.4	139.7	174.6
145°	0.0	0.0	52.4	122.2	139.7
147.5°	0.0	0.0	34.9	87.3	122.2
150°	0.0	0.0	17.5	69.8	87.3
152.5°	0.0	0.0	0.0	52.4	69.8
155°	0.0	0.0	0.0	34.9	52.4
157.5°	0.0	0.0	0.0	0.0	17.5
160°	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1357541
 CATALOG NUMBER: 8ASL4-35VHE-3-50-UNV

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	21.60	23.14	22.07	23.59	24.08	23.67	25.21	24.14	25.66	26.15
	3H	23.09	24.50	23.58	24.96	25.49	26.15	27.55	26.63	28.02	28.54
	4H	23.57	24.91	24.08	25.39	25.93	27.36	28.69	27.87	29.18	29.71
	6H	23.85	25.09	24.36	25.59	26.14	28.64	29.88	29.16	30.38	30.93
	8H	23.90	25.09	24.43	25.61	26.17	29.31	30.50	29.84	31.02	31.58
	12H	23.91	25.05	24.45	25.57	26.16	30.06	31.20	30.59	31.71	32.30
4H	2H	22.48	23.81	22.99	24.30	24.83	24.10	25.43	24.60	25.91	26.45
	3H	24.22	25.35	24.73	25.88	26.44	26.81	27.94	27.32	28.47	29.03
	4H	24.82	25.86	25.36	26.40	26.99	28.19	29.23	28.73	29.77	30.36
	6H	25.22	26.14	25.77	26.70	27.31	29.66	30.58	30.22	31.14	31.75
	8H	25.31	26.18	25.87	26.74	27.36	30.44	31.30	31.00	31.86	32.48
	12H	25.36	26.14	25.94	26.73	27.36	31.31	32.09	31.89	32.68	33.31
8H	4H	25.51	26.38	26.07	26.94	27.56	28.41	29.27	28.97	29.83	30.45
	6H	26.09	26.82	26.68	27.43	28.05	30.05	30.78	30.64	31.38	32.01
	8H	26.27	26.93	26.88	27.55	28.19	30.96	31.62	31.57	32.24	32.87
	12H	26.39	26.98	26.99	27.58	28.29	32.02	32.61	32.63	33.21	33.92
12H	4H	25.71	26.49	26.29	27.09	27.71	28.41	29.20	29.00	29.79	30.41
	6H	26.39	27.05	27.00	27.67	28.31	30.08	30.74	30.69	31.36	32.00
	8H	26.67	27.26	27.28	27.86	28.57	31.07	31.66	31.67	32.26	32.96

LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

Fail-Safe

Report Number: SP1-2511-597-5

Test Date: 11/18/2025

Luminaire Tested: 4ASL-2-50-UNV-OPL-1_600mA

Data in this report applies to families of products including 4ASL

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2511-597-5
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 11/18/2025
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: Fail-Safe
 Catalog Number: **4ASL-2-50-UNV-OPL-1_600mA**
 Description: 2foot 4ASL LED LUMINAIRE WITH OPL LENS AND 5000K LEDs with 1 rows at 600mA

Spectral Parameters

CCT (K): 5076
 CIE u': 0.2110
 CIE v': 0.4830
 Duv: -0.0005
 CIE x: 0.3429
 CIE y: 0.3489
 CIE z: 0.3082
 Peak Wavelength (nm): 630
 Dominant Wavelength (nm): 572
 Purity: 7.553016
 R_f: 90.4
 R_g: 99

CRI (Ra):	94.9		
R1:	96.7	R9:	74.0
R2:	98.2	R10:	93.9
R3:	96.6	R11:	96.2
R4:	95.6	R12:	72.4
R5:	95.1	R13:	98.1
R6:	93.6	R14:	97.8
R7:	94.0	R15:	95.6
R8:	89.6		



Test Conditions

Stabilization Time: 24M
 Operation Time: 1H 24M
 Sphere Temperature (°C): 24.1

REPORT NUMBER: SP1-2511-597-5


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	6/16/2025	12/16/2025
Power Meter	XITRON INXT2011004	10/21/2025	10/21/2026
AC Power Source	CHROMA 61603 IN0063	10/21/2025	10/21/2026
DC Power Source	AGILENT E3634A IN0208	10/21/2025	10/21/2026
Sphere Thermometer	ONSET IN0085	10/21/2025	10/21/2026
Room Thermometer	ONSET IN0046	10/21/2025	10/21/2026

REPORT NUMBER: SP1-2511-597-5

CIE 1931 Chromaticity Diagram




CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

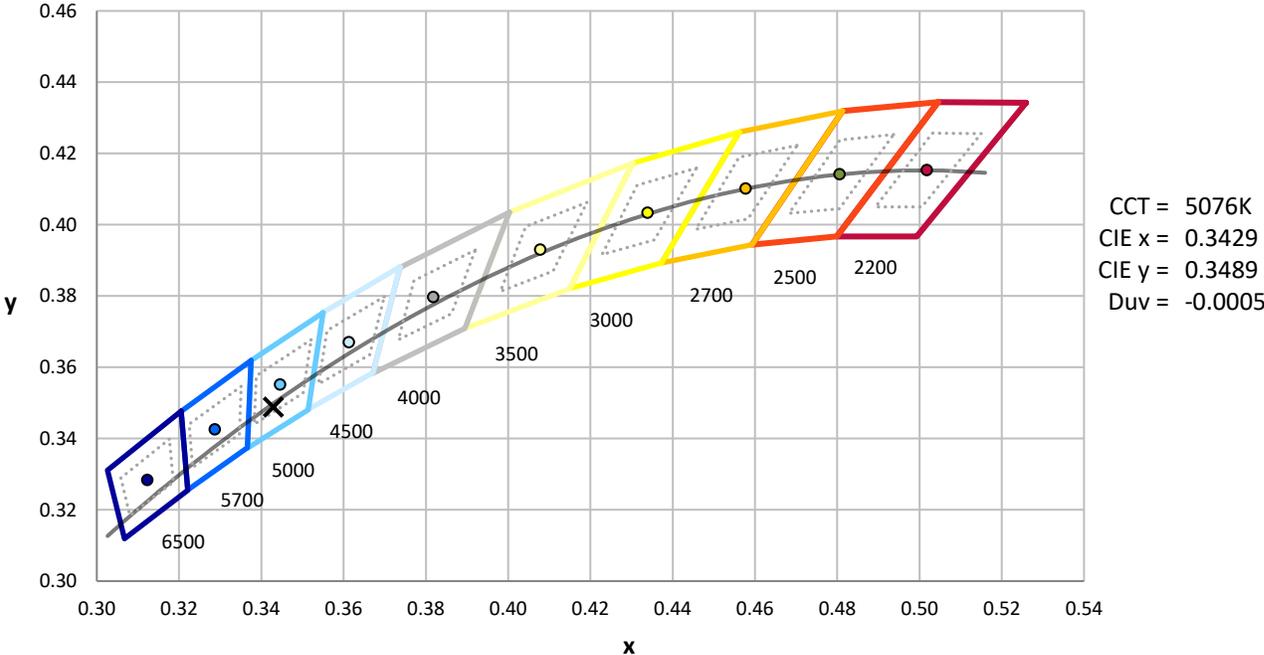

Point lies inside the ANSI 5000K 4-step quadrangle

REPORT NUMBER: SP1-2511-597-5

Photopic Flux vs. Wavelength

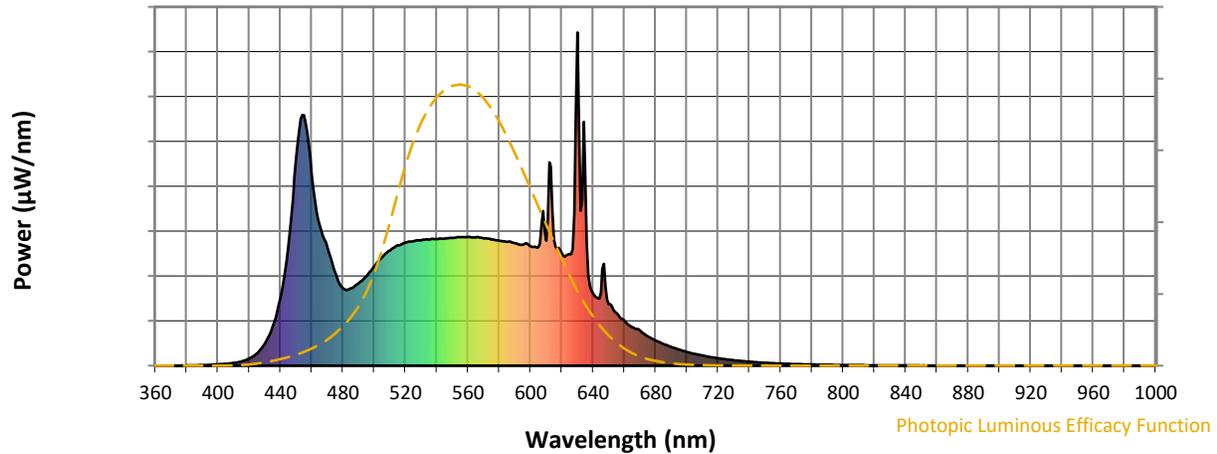


Photopic Lumens: NR

λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)	λ (nm)	Power W [^] /nm	Lumens (ϕ /nm)
360	0	NR	490	248	NR	620	337	NR	750	9	NR	880	0	NR
365	0	NR	495	269	NR	625	335	NR	755	8	NR	885	0	NR
370	0	NR	500	298	NR	630	1000	NR	760	6	NR	890	0	NR
375	0	NR	505	325	NR	635	580	NR	765	6	NR	895	0	NR
380	1	NR	510	346	NR	640	216	NR	770	5	NR	900	0	NR
385	1	NR	515	361	NR	645	221	NR	775	4	NR	905	0	NR
390	2	NR	520	369	NR	650	185	NR	780	4	NR	910	0	NR
395	3	NR	525	374	NR	655	158	NR	785	3	NR	915	0	NR
400	4	NR	530	376	NR	660	136	NR	790	3	NR	920	0	NR
405	6	NR	535	379	NR	665	116	NR	795	2	NR	925	0	NR
410	8	NR	540	381	NR	670	106	NR	800	2	NR	930	0	NR
415	13	NR	545	381	NR	675	88	NR	805	2	NR	935	0	NR
420	22	NR	550	383	NR	680	76	NR	810	2	NR	940	0	NR
425	37	NR	555	386	NR	685	65	NR	815	1	NR	945	0	NR
430	66	NR	560	386	NR	690	56	NR	820	1	NR	950	0	NR
435	119	NR	565	385	NR	695	48	NR	825	1	NR	955	0	NR
440	203	NR	570	382	NR	700	41	NR	830	1	NR	960	0	NR
445	359	NR	575	379	NR	705	35	NR	835	1	NR	965	0	NR
450	620	NR	580	376	NR	710	30	NR	840	1	NR	970	0	NR
455	752	NR	585	372	NR	715	26	NR	845	1	NR	975	0	NR
460	576	NR	590	368	NR	720	22	NR	850	1	NR	980	0	NR
465	423	NR	595	363	NR	725	19	NR	855	0	NR	985	0	NR
470	354	NR	600	358	NR	730	16	NR	860	0	NR	990	0	NR
475	280	NR	605	355	NR	735	14	NR	865	0	NR	995	0	NR
480	232	NR	610	375	NR	740	12	NR	870	0	NR	1000	0	NR
485	232	NR	615	379	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2511-597-5

Scotopic Flux vs. Wavelength

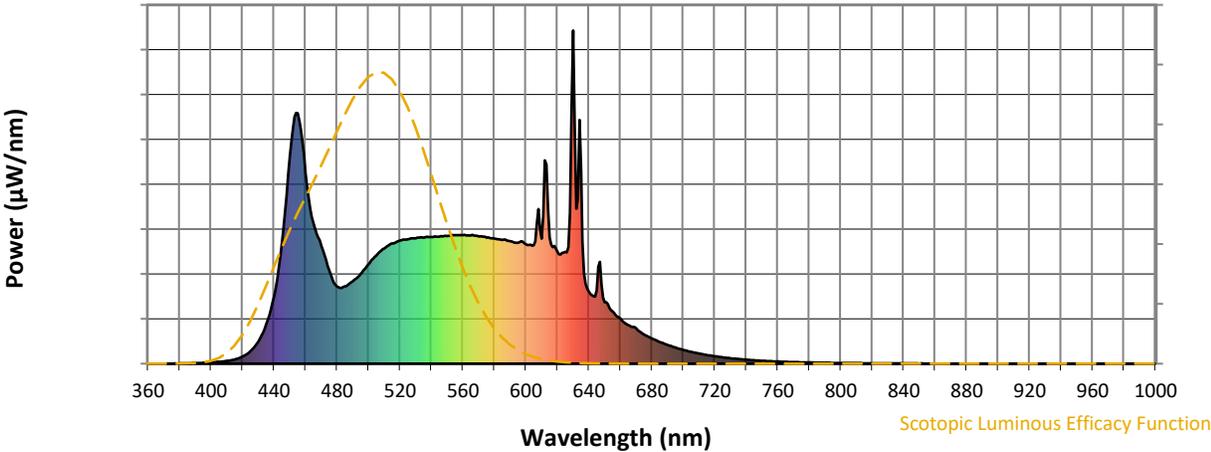


Scotopic Lumens: NR

S/P: 2.12

λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	248	NR	620	337	NR	750	9	NR	880	0	NR
365	0	NR	495	269	NR	625	335	NR	755	8	NR	885	0	NR
370	0	NR	500	298	NR	630	1000	NR	760	6	NR	890	0	NR
375	0	NR	505	325	NR	635	580	NR	765	6	NR	895	0	NR
380	1	NR	510	346	NR	640	216	NR	770	5	NR	900	0	NR
385	1	NR	515	361	NR	645	221	NR	775	4	NR	905	0	NR
390	2	NR	520	369	NR	650	185	NR	780	4	NR	910	0	NR
395	3	NR	525	374	NR	655	158	NR	785	3	NR	915	0	NR
400	4	NR	530	376	NR	660	136	NR	790	3	NR	920	0	NR
405	6	NR	535	379	NR	665	116	NR	795	2	NR	925	0	NR
410	8	NR	540	381	NR	670	106	NR	800	2	NR	930	0	NR
415	13	NR	545	381	NR	675	88	NR	805	2	NR	935	0	NR
420	22	NR	550	383	NR	680	76	NR	810	2	NR	940	0	NR
425	37	NR	555	386	NR	685	65	NR	815	1	NR	945	0	NR
430	66	NR	560	386	NR	690	56	NR	820	1	NR	950	0	NR
435	119	NR	565	385	NR	695	48	NR	825	1	NR	955	0	NR
440	203	NR	570	382	NR	700	41	NR	830	1	NR	960	0	NR
445	359	NR	575	379	NR	705	35	NR	835	1	NR	965	0	NR
450	620	NR	580	376	NR	710	30	NR	840	1	NR	970	0	NR
455	752	NR	585	372	NR	715	26	NR	845	1	NR	975	0	NR
460	576	NR	590	368	NR	720	22	NR	850	1	NR	980	0	NR
465	423	NR	595	363	NR	725	19	NR	855	0	NR	985	0	NR
470	354	NR	600	358	NR	730	16	NR	860	0	NR	990	0	NR
475	280	NR	605	355	NR	735	14	NR	865	0	NR	995	0	NR
480	232	NR	610	375	NR	740	12	NR	870	0	NR	1000	0	NR
485	232	NR	615	379	NR	745	10	NR	875	0	NR			

REPORT NUMBER: SP1-2511-597-5

Melanopic Flux vs. Wavelength

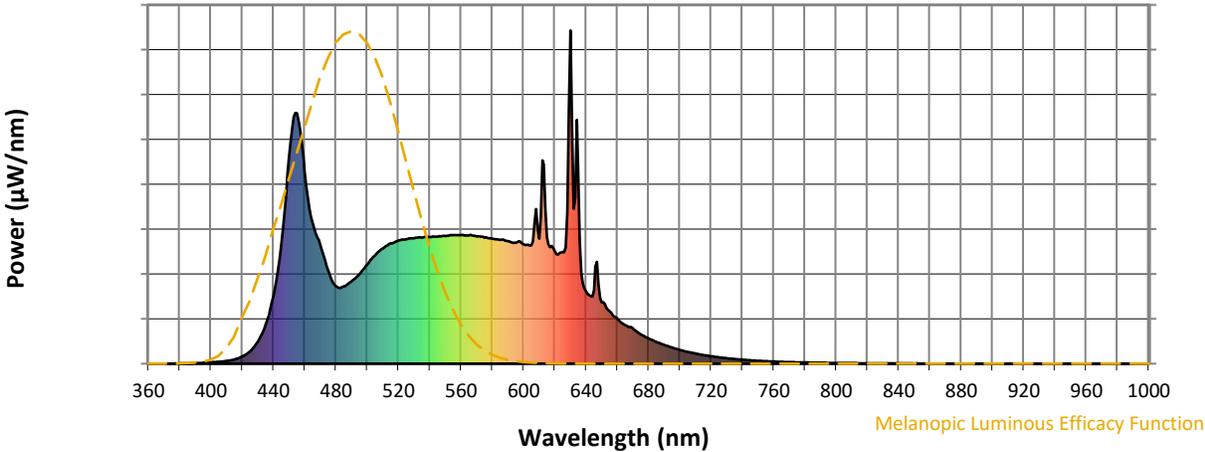


Melanopic Lumens: NR

M/P: 4.65





λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)	λ (nm)	Power W [^] /nm	Lumens (φ/nm)
360	0	NR	490	248	NR	620	337	NR	750	9	NR	880	0	NR
365	0	NR	495	269	NR	625	335	NR	755	8	NR	885	0	NR
370	0	NR	500	298	NR	630	1000	NR	760	6	NR	890	0	NR
375	0	NR	505	325	NR	635	580	NR	765	6	NR	895	0	NR
380	1	NR	510	346	NR	640	216	NR	770	5	NR	900	0	NR
385	1	NR	515	361	NR	645	221	NR	775	4	NR	905	0	NR
390	2	NR	520	369	NR	650	185	NR	780	4	NR	910	0	NR
395	3	NR	525	374	NR	655	158	NR	785	3	NR	915	0	NR
400	4	NR	530	376	NR	660	136	NR	790	3	NR	920	0	NR
405	6	NR	535	379	NR	665	116	NR	795	2	NR	925	0	NR
410	8	NR	540	381	NR	670	106	NR	800	2	NR	930	0	NR
415	13	NR	545	381	NR	675	88	NR	805	2	NR	935	0	NR
420	22	NR	550	383	NR	680	76	NR	810	2	NR	940	0	NR
425	37	NR	555	386	NR	685	65	NR	815	1	NR	945	0	NR
430	66	NR	560	386	NR	690	56	NR	820	1	NR	950	0	NR
435	119	NR	565	385	NR	695	48	NR	825	1	NR	955	0	NR
440	203	NR	570	382	NR	700	41	NR	830	1	NR	960	0	NR
445	359	NR	575	379	NR	705	35	NR	835	1	NR	965	0	NR
450	620	NR	580	376	NR	710	30	NR	840	1	NR	970	0	NR
455	752	NR	585	372	NR	715	26	NR	845	1	NR	975	0	NR
460	576	NR	590	368	NR	720	22	NR	850	1	NR	980	0	NR
465	423	NR	595	363	NR	725	19	NR	855	0	NR	985	0	NR
470	354	NR	600	358	NR	730	16	NR	860	0	NR	990	0	NR
475	280	NR	605	355	NR	735	14	NR	865	0	NR	995	0	NR
480	232	NR	610	375	NR	740	12	NR	870	0	NR	1000	0	NR
485	232	NR	615	379	NR	745	10	NR	875	0	NR			

Summary

$R_f = 90.4$
 $R_g = 99$
 $CIE R_a = 94.9$
 $R_9 = 74.0$

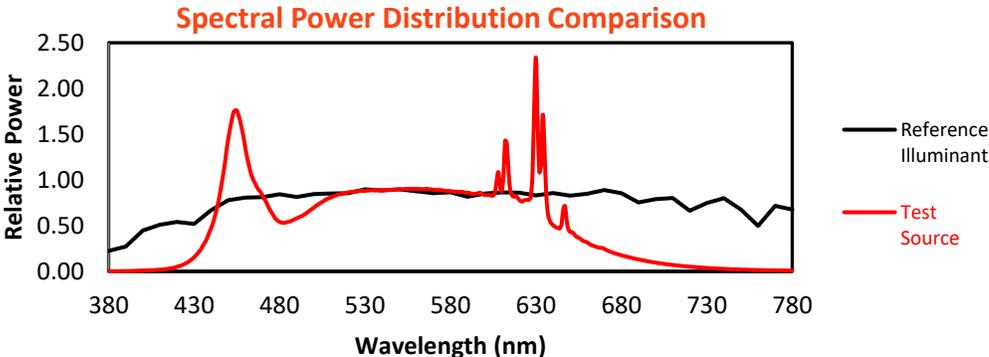


Color Vector Graphics

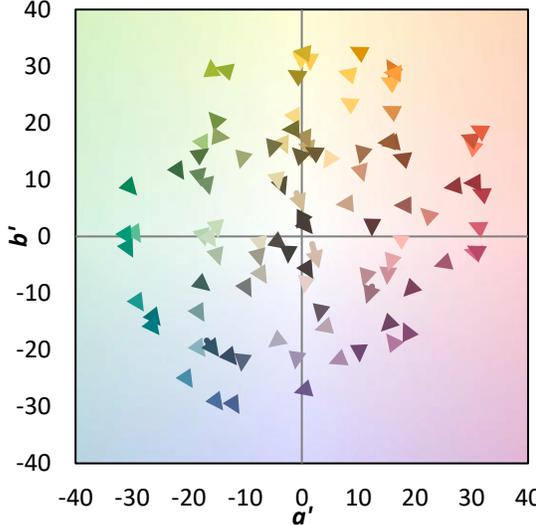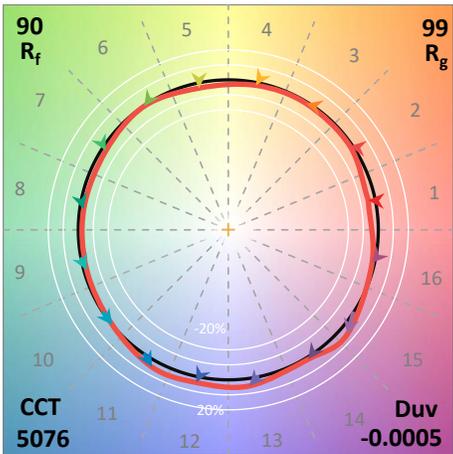
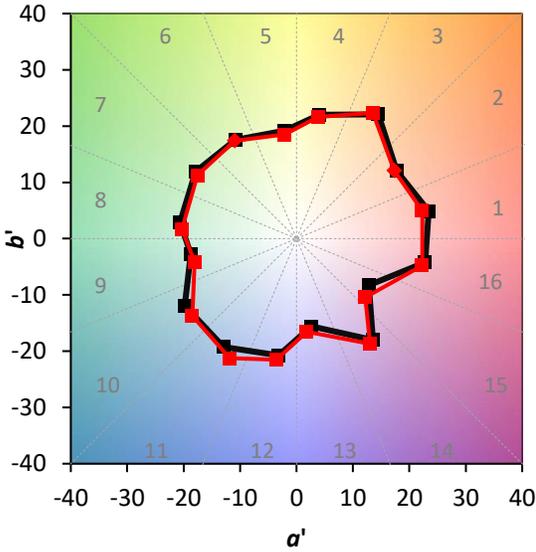
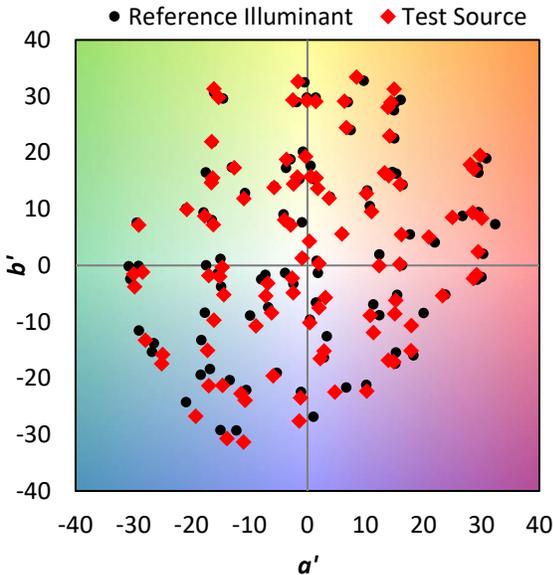


Individual Sample Fidelity Index ($R_{f,i}$)



CES01 = 85	CES26 = 95	CES51 = 95	CES76 = 87
CES02 = 61	CES27 = 89	CES52 = 98	CES77 = 87
CES03 = 31	CES28 = 96	CES53 = 96	CES78 = 84
CES04 = 69	CES29 = 95	CES54 = 90	CES79 = 94
CES05 = 48	CES30 = 84	CES55 = 88	CES80 = 93
CES06 = 50	CES31 = 96	CES56 = 91	CES81 = 81
CES07 = 41	CES32 = 92	CES57 = 89	CES82 = 97
CES08 = 40	CES33 = 94	CES58 = 89	CES83 = 95
CES09 = 29	CES34 = 94	CES59 = 96	CES84 = 93
CES10 = 73	CES35 = 96	CES60 = 90	CES85 = 82
CES11 = 56	CES36 = 76	CES61 = 90	CES86 = 85
CES12 = 62	CES37 = 95	CES62 = 80	CES87 = 93
CES13 = 42	CES38 = 79	CES63 = 90	CES88 = 97
CES14 = 74	CES39 = 98	CES64 = 86	CES89 = 87
CES15 = 71	CES40 = 99	CES65 = 87	CES90 = 94
CES16 = 47	CES41 = 93	CES66 = 83	CES91 = 70
CES17 = 48	CES42 = 94	CES67 = 82	CES92 = 78
CES18 = 56	CES43 = 95	CES68 = 85	CES93 = 86
CES19 = 70	CES44 = 99	CES69 = 86	CES94 = 79
CES20 = 65	CES45 = 99	CES70 = 84	CES95 = 83
CES21 = 85	CES46 = 97	CES71 = 76	CES96 = 93
CES22 = 77	CES47 = 93	CES72 = 92	CES97 = 96
CES23 = 91	CES48 = 86	CES73 = 80	CES98 = 95
CES24 = 90	CES49 = 98	CES74 = 89	CES99 = 93
CES25 = 70	CES50 = 96	CES75 = 79	

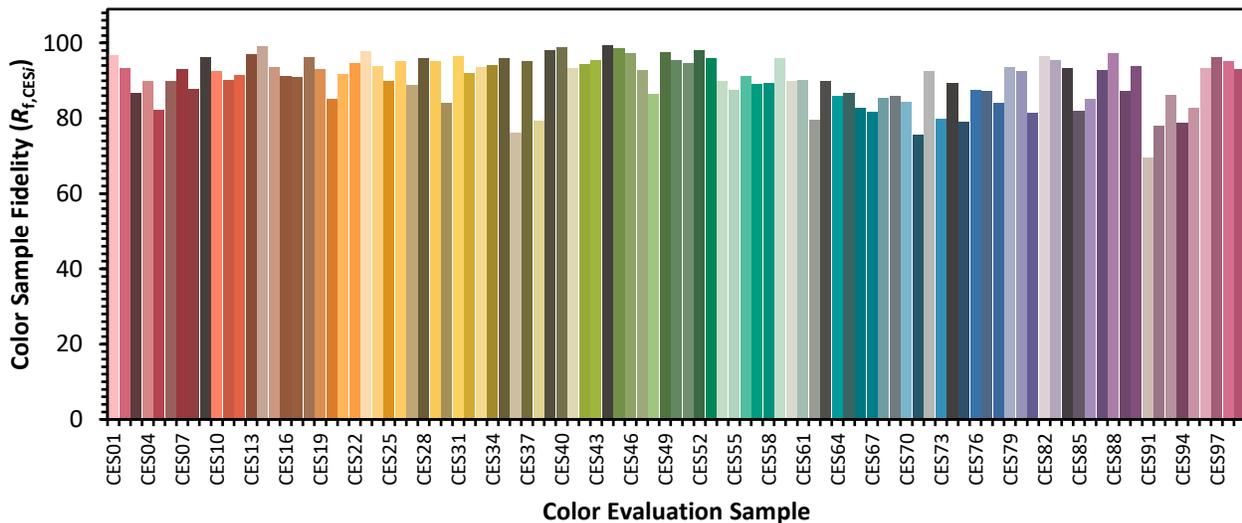

Color Rendition by Hue-Angle Bin

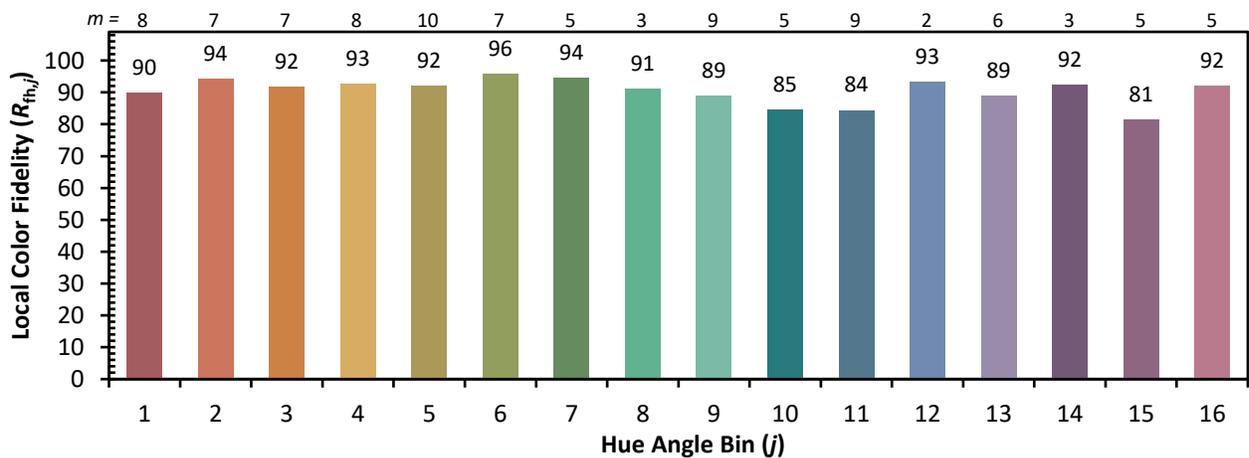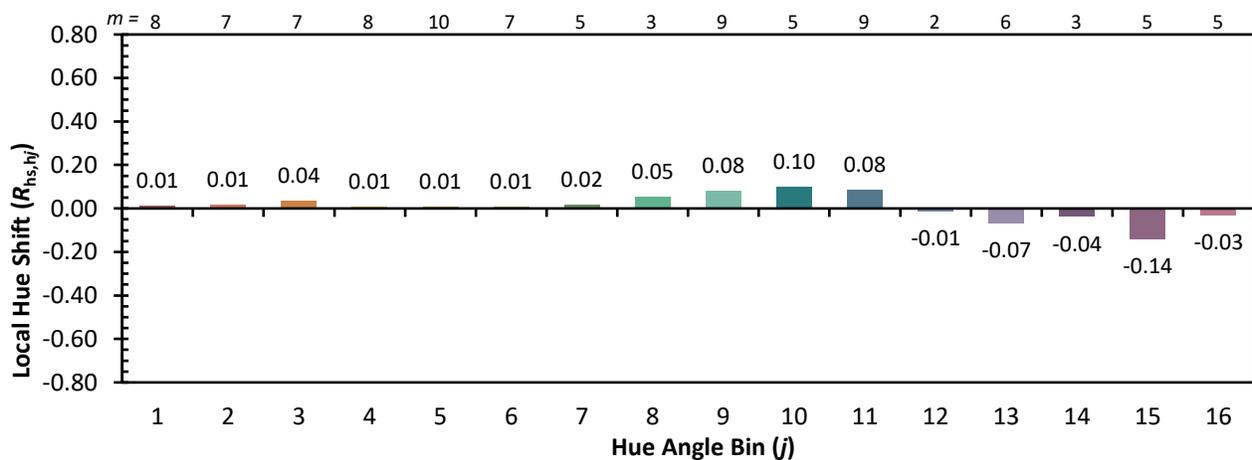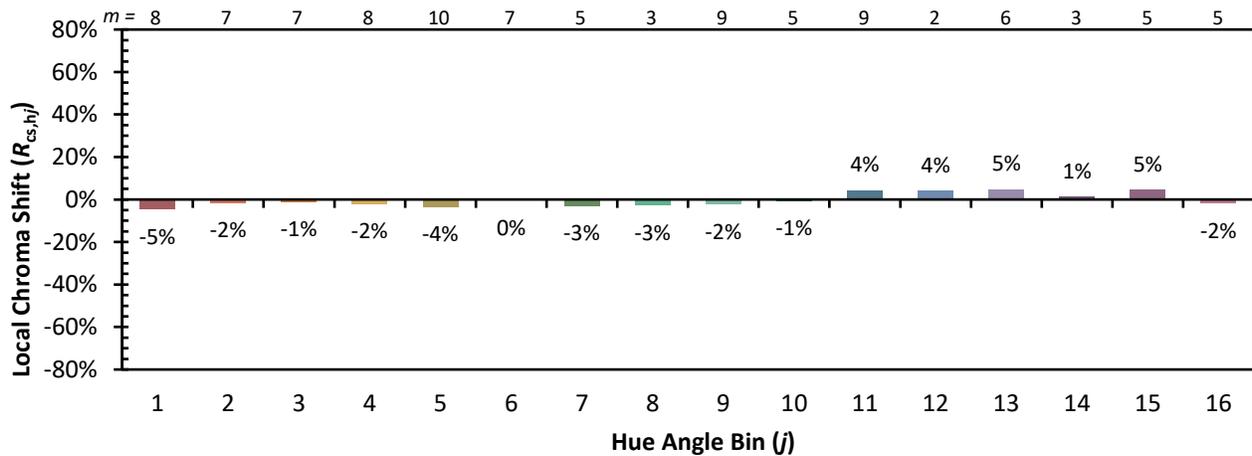

Measure Comparisons

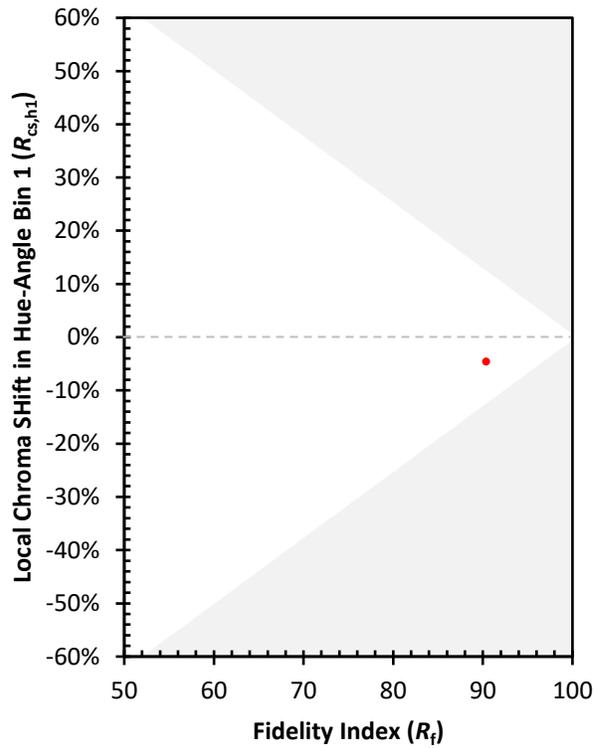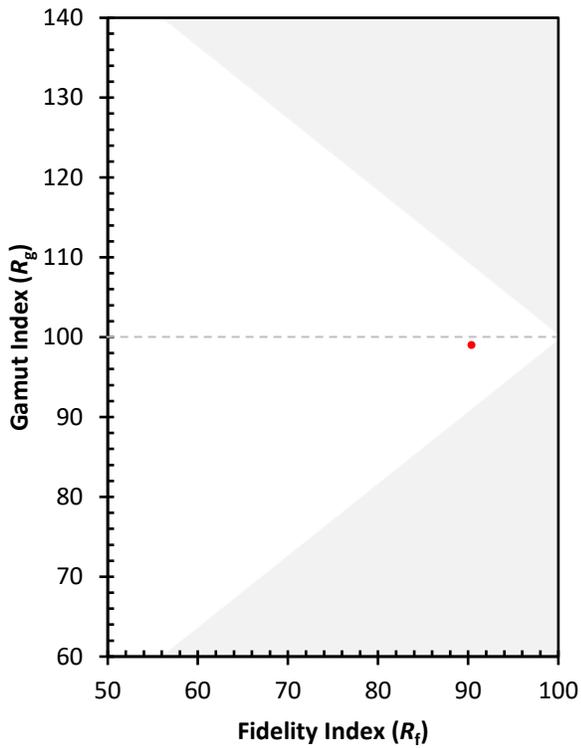

(END OF REPORT)