

LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: FAIL-SAFE

Report Number: P518198

Luminaire Tested: HVL8-8-LD4-1STD-40-UNV-O-EDD

Issue Date: 4/27/2021

Tested By:

Approved By:



NVLAP Lab Code: 200050-0

Cooper Lighting Solutions laboratories have been accredited by National Voluntary Laboratory Accreditation Program (NVLAP) that it adheres to the requirements of ISO/IEC 17025:2005 and appropriate IESNA test methods. This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the Federal Government. Results contained in this report are valid for luminaire sample tested, as supplied by requestor. Information related to the luminaire tested has been supplied by requestor and can affect the validity of the test results. Report shall not be reproduced except in full without approval of Cooper Lighting Solutions Lighting Laboratory. Test performed at address noted above.

Test Information

Test Method: LM-79-2019
Report Number: P518198
Test Lab: INNOVATION CENTER
Issue Date: 4/27/2021
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: FAIL-SAFE
Catalog Number: HVL8-8-LD4-1STD-40-UNV-O-EDD
Description: 8 FOOT, 8 INCH WIDE, HVL LED LUMINAIRE, WITH 4000K, 80 CRI LEDS
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5648.0 lumens
Efficiency: N/A
Efficacy: 86.6 lumens/watt
Spacing Criteria (0/90/45): 1.25 / 1.27 / 1.38
Luminous Opening: Rectangular w/ Sides (W: 0.67' x L: 8' x H: 0.17')
CIE Type: Direct


Input Watts (W): 65.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	P3	10/30/2015	4/30/2016
Power Meter	IN0214	1/12/2016	1/12/2017
AC Power Source	IN0062	1/12/2016	1/12/2017
DC Power Supply	--	--	--
Room Thermometer	IN0145	1/13/2016	1/13/2017

TEST NUMBER: P518198

CATALOG NUMBER: HVL8-8-LD4-1STD-40-UNV-O-EDD

Luminous Intensity Polar Plot

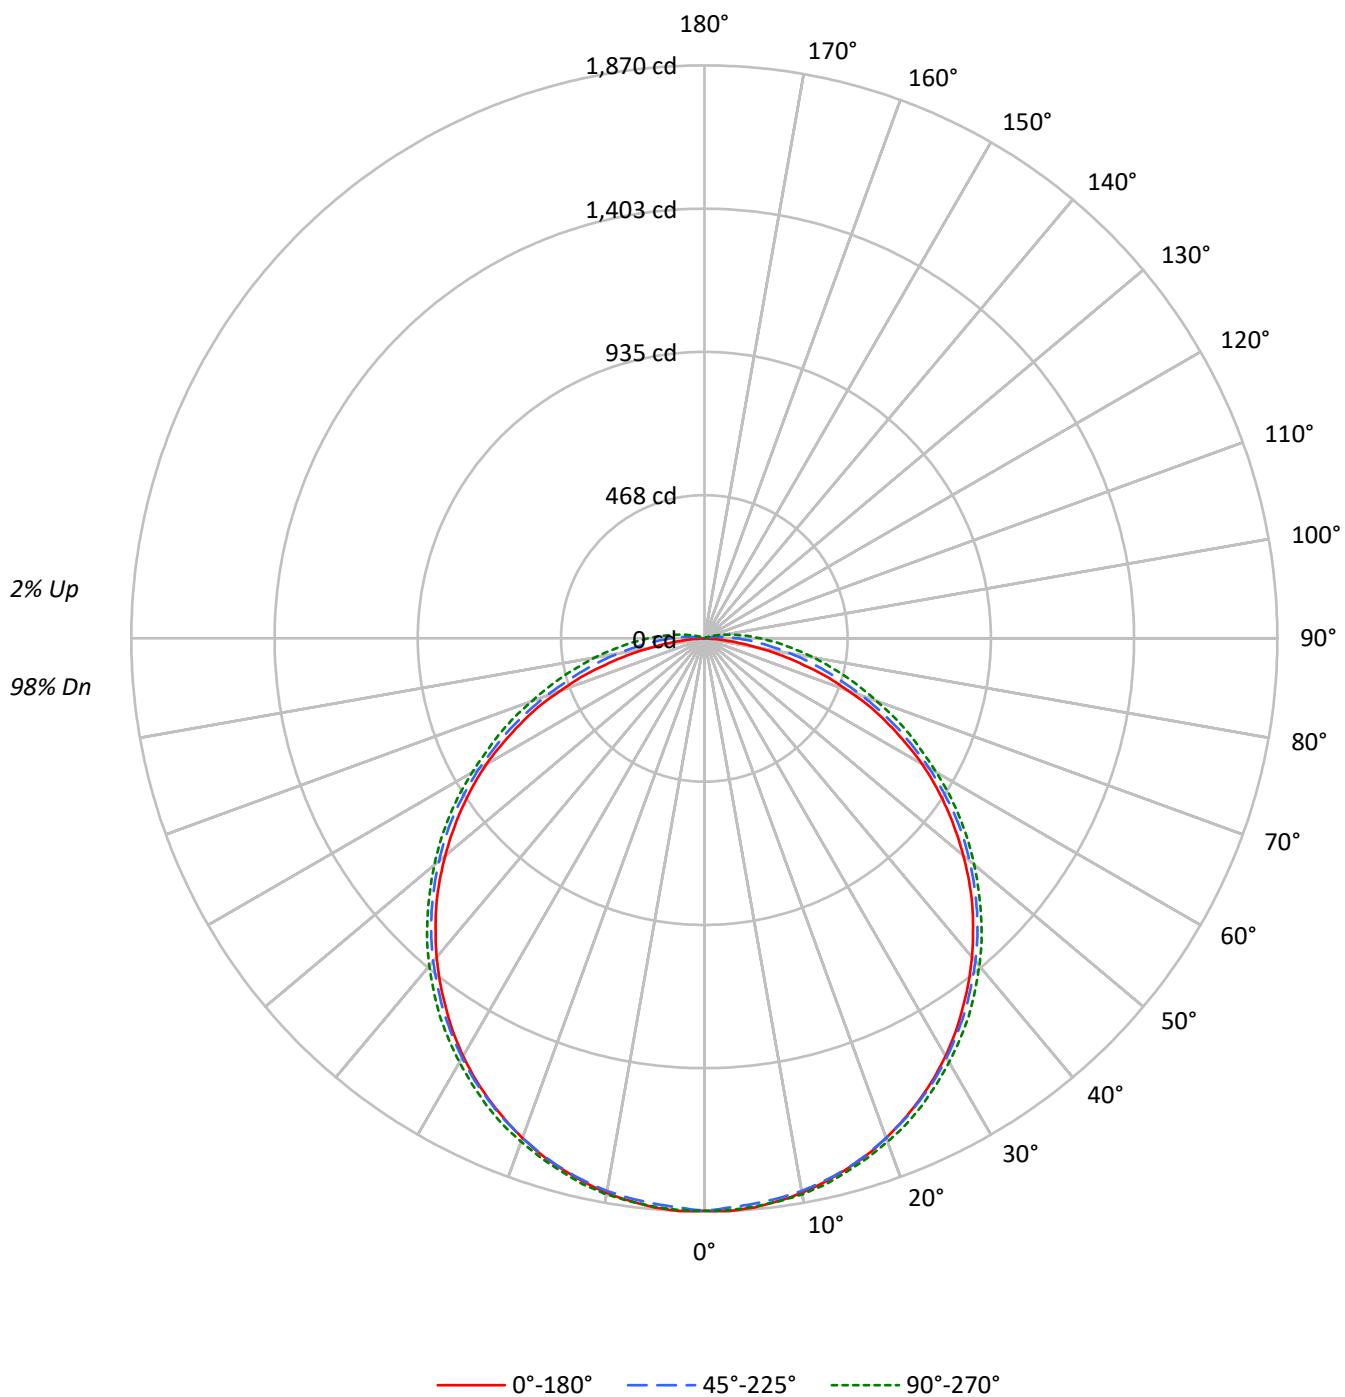

TEST NUMBER: P518198

CATALOG NUMBER: HVL8-8-LD4-1STD-40-UNV-O-EDD

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101			98
1	108	102	98	94	105	100	96	92	95	92	89	91	88	86	87	85	83			81
2	98	89	82	76	95	87	80	75	83	77	73	79	75	71	76	72	69			67
3	89	78	69	63	86	76	68	62	73	66	61	70	64	59	67	62	58			56
4	81	69	60	53	79	67	59	52	65	57	52	62	56	51	60	54	50			47
5	75	61	52	45	72	60	52	45	58	50	44	56	49	44	54	48	43			41
6	69	55	46	40	67	54	46	39	52	45	39	50	44	38	49	43	38			36
7	64	50	41	35	62	49	41	35	47	40	34	46	39	34	44	38	34			32
8	59	46	37	31	58	45	37	31	43	36	31	42	35	30	41	35	30			28
9	55	42	34	28	54	41	33	28	40	33	28	39	32	27	38	32	27			25
10	52	39	31	25	51	38	30	25	37	30	25	36	29	25	35	29	25			23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3770	3770	3770
5°	3770	3691	3690
10°	3751	3629	3616
15°	3726	3560	3527
20°	3698	3483	3441
25°	3664	3403	3353
30°	3624	3317	3253
35°	3572	3223	3155
40°	3518	3123	3040
45°	3460	3015	2916
50°	3382	2889	2782
55°	3300	2750	2635
60°	3201	2568	2463
65°	3033	2364	2293
70°	2787	2123	2095
75°	2431	1858	1915
80°	1886	1599	1751
85°	1087	1340	1594

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3460 cd/sqm

TEST NUMBER: P518198

CATALOG NUMBER: HVL8-8-LD4-1STD-40-UNV-O-EDD

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	176.8	3.1
10°-20°	507.1	9.0
20°-30°	769.4	13.6
30°-40°	930.3	16.5
40°-50°	970.7	17.2
50°-60°	887.5	15.7
60°-70°	691.9	12.2
70°-80°	432.8	7.7
80°-90°	196.6	3.5
90°-100°	65.9	1.2
100°-110°	16.5	0.3
110°-120°	2.6	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1453.2	25.7
0°-40°	2383.5	42.2
0°-60°	4241.8	75.1
0°-90°	5563.0	98.5
90°-120°	85.0	1.5
90°-150°	85.0	1.5
90°-180°	85.0	1.5
0°-180°	5648.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1868	1868	1868	1868	1868	
5°	1864	1860	1852	1861	1861	177
15°	1793	1796	1791	1802	1801	506
25°	1662	1663	1665	1679	1681	766
35°	1471	1477	1484	1499	1505	921
45°	1237	1248	1259	1271	1277	953
55°	966	977	995	1010	1016	863
65°	664	675	698	726	738	657
75°	336	357	409	458	475	358
85°	58	107	184	244	266	74
90°	0	40	109	163	183	2
95°	0	11	56	102	118	0
105°	1	1	9	27	37	1
115°	1	1	2	5	7	1
125°	0	0	0	0	0	0
135°	0	0	0	0	0	0
145°	0	0	0	0	0	0
155°	0	0	0	0	0	0
165°	0	0	0	0	0	0
175°	0	0	0	0	0	0
180°	0	0	0	0	0	0

TEST NUMBER: P518198

CATALOG NUMBER: HVL8-8-LD4-1STD-40-UNV-O-EDD

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1868.0	1868.0	1868.0	1868.0	1868.0
2.5°	1870.2	1867.6	1859.2	1867.6	1867.1
5°	1864.1	1860.5	1852.2	1861.0	1861.0
7.5°	1851.7	1850.4	1842.9	1853.0	1853.0
10°	1837.2	1836.8	1830.6	1841.6	1842.0
12.5°	1816.9	1818.7	1813.0	1823.5	1824.9
15°	1793.2	1796.2	1791.4	1801.5	1801.1
17.5°	1767.2	1768.9	1765.4	1776.9	1776.4
20°	1735.0	1737.2	1734.6	1746.5	1747.8
22.5°	1699.4	1702.4	1702.0	1714.3	1717.9
25°	1661.5	1662.8	1664.6	1678.7	1681.3
27.5°	1619.7	1621.9	1624.9	1637.7	1640.3
30°	1573.9	1577.4	1580.9	1594.1	1597.6
32.5°	1525.4	1528.9	1533.3	1550.5	1552.3
35°	1470.8	1477.4	1483.6	1498.6	1504.7
37.5°	1416.2	1424.6	1430.3	1446.2	1451.0
40°	1358.5	1366.9	1376.1	1392.9	1395.9
42.5°	1298.2	1307.9	1318.9	1333.9	1339.1
45°	1237.4	1248.4	1258.6	1270.9	1277.1
47.5°	1171.8	1182.8	1195.1	1209.2	1213.2
50°	1104.0	1116.8	1130.0	1143.2	1150.2
52.5°	1034.4	1049.8	1064.8	1078.9	1085.5
55°	965.7	977.2	995.2	1009.8	1016.4
57.5°	894.4	904.1	920.4	944.1	947.7
60°	821.7	830.5	847.3	866.6	874.6
62.5°	741.6	753.5	771.1	795.7	802.8
65°	663.6	675.1	698.4	726.2	737.6
67.5°	588.3	592.3	622.2	651.3	669.8
70°	499.4	514.3	549.1	584.8	598.9
72.5°	422.7	437.7	476.0	517.9	535.5
75°	336.0	356.7	408.7	457.5	474.7
77.5°	259.8	282.7	347.0	396.3	416.1
80°	181.4	217.1	287.1	342.6	364.2
82.5°	114.1	158.1	233.0	291.1	310.0
85°	58.1	107.4	184.5	244.0	265.5
87.5°	15.4	69.6	143.6	200.4	222.4
90°	0.4	40.1	108.8	163.4	183.2
92.5°	0.4	22.5	81.0	129.9	150.2
95°	0.4	10.6	56.4	102.2	118.0
97.5°	0.4	4.4	38.8	77.1	92.9
100°	0.4	2.2	24.7	55.9	69.6
102.5°	0.9	1.3	15.4	40.1	51.1
105°	0.9	1.3	9.2	27.3	36.6
107.5°	0.9	1.3	5.3	18.5	25.1
110°	1.3	1.3	3.1	11.4	16.7

TEST NUMBER: P518198

CATALOG NUMBER: HVL8-8-LD4-1STD-40-UNV-O-EDD

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1.3	1.3	1.8	7.5	11.0
115°	1.3	1.3	1.8	4.8	7.0
117.5°	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0
122.5°	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0
127.5°	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0
132.5°	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0
137.5°	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0
142.5°	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0
147.5°	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0
152.5°	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)