

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P861213

Luminaire Tested: **8APVTLD-SL3C3 MID POWER 3500K 120V**

Issue Date: 1/11/2023



Test Information

Test Method: LM-79-08
Report Number: P861213
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (NTCLR22090026)
Test Lab: INNOVATION CENTER
Issue Date: 1/11/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 8APVTLD-SL3C3 MID POWER 3500K 120V
Description: MID POWER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10483.3 lumens
Efficiency: N/A
Efficacy: 134.9 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.28 / 1.38
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 8' x H: 0.08')
CIE Type: Direct

Input Watts (W): 77.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P861213

CATALOG NUMBER: 8APVTLD-SL3C3 MID POWER 3500K 120V

Luminous Intensity Polar Plot

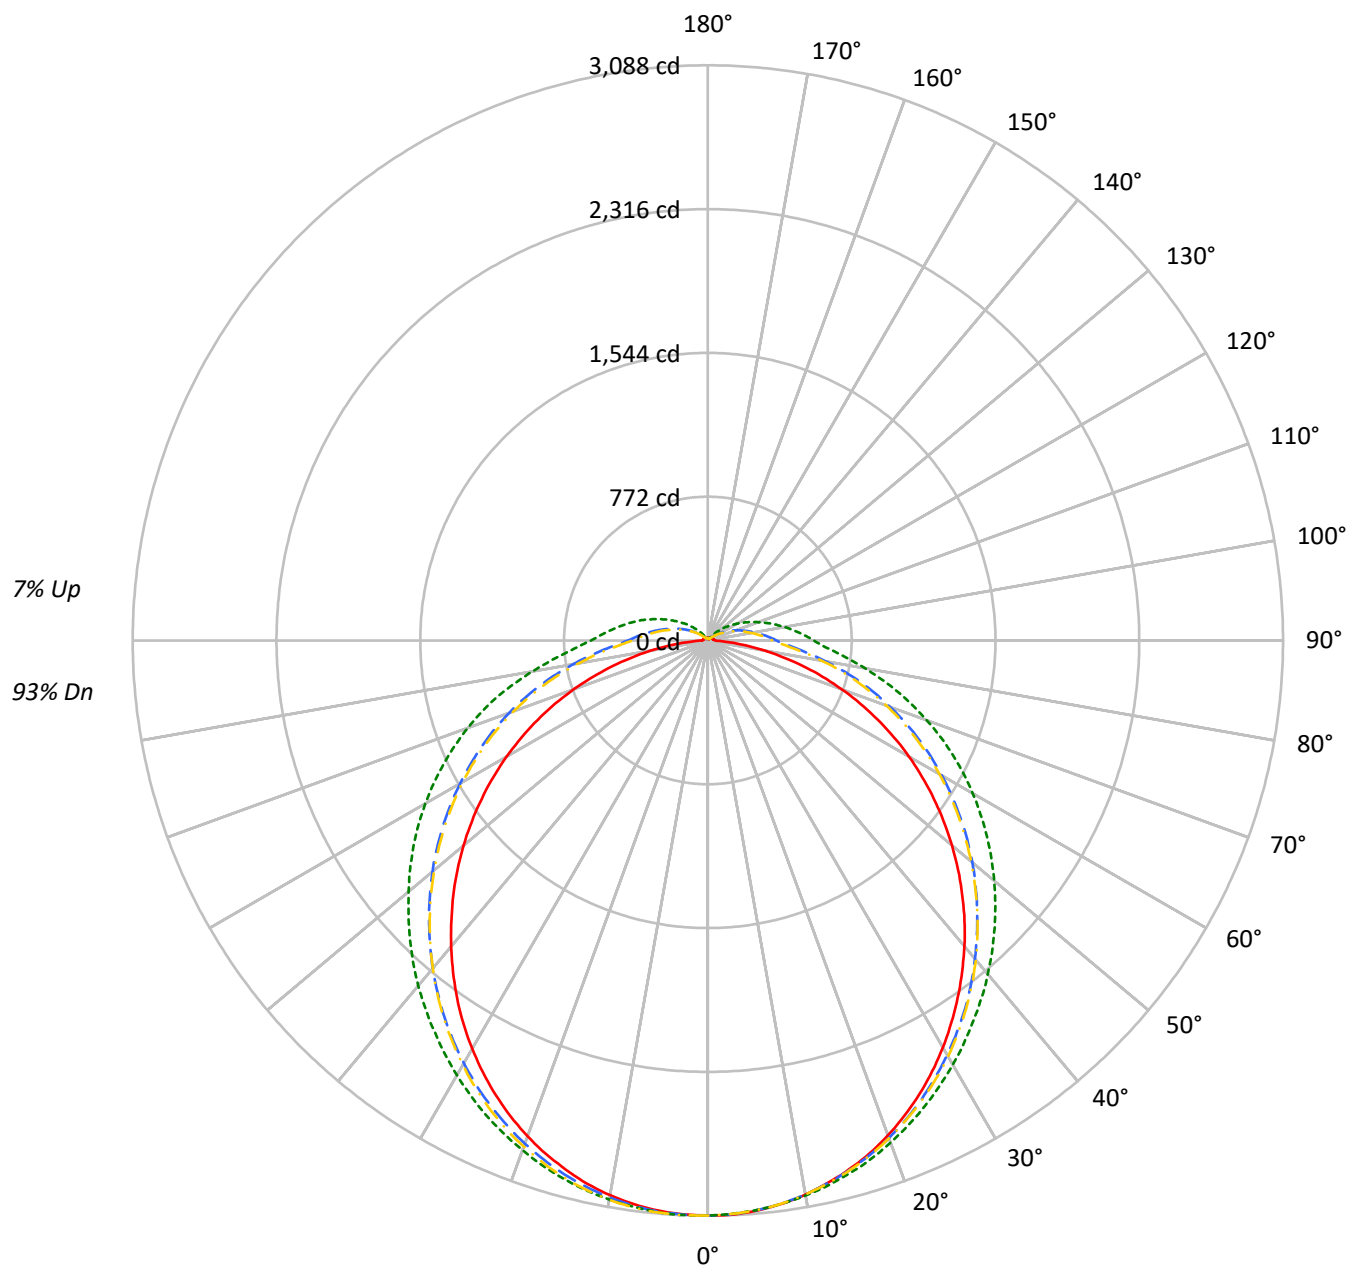



TEST NUMBER: P861213

CATALOG NUMBER: 8APVTLD-SL3C3 MID POWER 3500K 120V

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	117	117	117	117		114	114	114	114		107	107	107		101	101	101		95	95	95
1	105	100	95	91		102	97	92	88		91	88	84		86	83	80		81	79	77
2	95	86	79	73		92	84	77	71		79	73	68		74	70	66		70	66	63
3	86	75	67	60		83	73	65	59		69	62	57		65	59	55		62	57	53
4	79	66	57	50		76	65	56	49		61	54	48		58	51	46		55	49	45
5	72	59	50	43		70	58	49	42		55	47	41		52	45	40		49	43	39
6	67	53	44	37		64	52	43	37		49	42	36		47	40	35		44	39	34
7	62	48	39	33		60	47	38	32		45	37	32		43	36	31		41	35	30
8	58	44	35	29		56	43	35	29		41	33	28		39	32	28		37	31	27
9	54	40	32	26		52	39	31	26		38	30	25		36	29	25		34	29	24
10	50	37	29	24		49	36	29	23		35	28	23		33	27	22		32	26	22

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	12461	12461	12461	12461
5°	12435	12165	12435	12218
10°	12358	11879	12372	11964
15°	12242	11589	12260	11719
20°	12099	11293	12119	11464
25°	11912	10998	11941	11223
30°	11688	10712	11723	10977
35°	11443	10433	11476	10736
40°	11194	10186	11198	10535
45°	10914	9943	10917	10332
50°	10604	9705	10613	10153
55°	10268	9478	10281	10008
60°	9889	9250	9901	9868
65°	9398	9008	9418	9726
70°	8770	8748	8794	9591
75°	7890	8477	7911	9443
80°	6661	8227	6668	9202
85°	5066	8191	5037	9203



TEST NUMBER: P861213

CATALOG NUMBER: 8APVTLD-SL3C3 MID POWER 3500K 120V

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	292.0	2.8
10°-20°	834.6	8.0
20°-30°	1262.3	12.0
30°-40°	1525.3	14.5
40°-50°	1604.9	15.3
50°-60°	1507.3	14.4
60°-70°	1256.7	12.0
70°-80°	896.5	8.6
80°-90°	525.4	5.0
90°-100°	327.8	3.1
100°-110°	215.5	2.1
110°-120°	127.2	1.2
120°-130°	65.1	0.6
130°-140°	25.4	0.2
140°-150°	8.4	0.1
150°-160°	4.8	0.0
160°-170°	3.0	0.0
170°-180°	1.1	0.0
0°-30°	2388.9	22.8
0°-40°	3914.2	37.3
0°-60°	7026.4	67.0
0°-90°	9705.0	92.6
90°-120°	670.5	6.4
90°-150°	769.3	7.3
90°-180°	778.0	7.4
0°-180°	10483.3	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	3087	3087	3087	3087	3087	
5°	3072	3068	3072	3081	3072	292
15°	2938	2959	2942	2992	2938	829
25°	2688	2757	2694	2814	2688	1238
35°	2339	2488	2346	2560	2339	1463
45°	1932	2177	1932	2262	1932	1490
55°	1481	1828	1483	1930	1481	1323
65°	1006	1449	1008	1564	1006	995
75°	526	1051	527	1170	526	557
85°	122	682	122	766	122	138
90°	39	569	33	629	39	24
95°	34	490	28	541	34	27
105°	28	350	24	398	28	30
115°	23	231	21	269	23	23
125°	18	134	17	162	18	16
135°	14	59	12	77	14	11
145°	11	12	10	18	11	7
155°	9	9	9	13	9	4
165°	11	8	13	11	11	3
175°	12	9	16	10	12	1
180°	12	12	12	12	12	



TEST NUMBER: P861213

CATALOG NUMBER: 8APVTLD-SL3C3 MID POWER 3500K 120V

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
0°	3087.0	3087.0	3087.0	3087.0	3087.0	3087.0	3087.0	3087.0	3087.0	3087.0	3087.0
1°	3087.2	3087.2	3087.2	3085.8	3085.4	3084.2	3085.4	3085.6	3086.4	3086.6	3087.2
2°	3086.4	3085.4	3084.6	3082.6	3082.0	3080.8	3082.4	3083.4	3085.0	3085.0	3086.0
3°	3083.2	3081.8	3080.6	3078.4	3078.4	3077.2	3079.2	3079.8	3082.2	3082.4	3083.6
4°	3077.8	3076.8	3075.7	3073.1	3073.7	3072.1	3074.5	3074.9	3077.8	3078.4	3080.8
5°	3071.7	3070.5	3069.1	3067.1	3067.9	3065.7	3068.5	3068.3	3071.7	3073.1	3077.2
6°	3063.9	3062.5	3061.9	3060.1	3061.3	3058.5	3062.5	3060.9	3065.5	3067.1	3071.5
7°	3054.6	3053.4	3052.6	3052.4	3053.8	3051.0	3054.0	3052.4	3057.1	3059.3	3063.5
8°	3044.6	3043.0	3042.8	3043.6	3045.4	3042.8	3043.0	3042.8	3047.0	3050.4	3055.2
9°	3033.5	3031.1	3032.1	3032.9	3036.2	3032.7	3031.7	3031.5	3036.2	3040.4	3046.4
10°	3020.7	3018.5	3019.5	3021.9	3025.9	3020.9	3019.5	3018.9	3024.1	3028.9	3036.6
11°	3006.4	3005.2	3006.4	3009.6	3014.6	3008.0	3006.4	3004.6	3010.6	3016.5	3024.7
12°	2990.7	2990.1	2991.7	2996.6	3002.2	2994.9	2992.5	2989.7	2996.0	3002.6	3012.6
13°	2974.0	2974.2	2976.5	2983.1	2988.1	2980.7	2977.3	2973.0	2979.7	2986.9	2998.8
14°	2956.8	2956.4	2959.8	2968.6	2973.6	2965.2	2961.0	2954.3	2961.6	2970.4	2984.3
15°	2937.7	2937.9	2942.1	2952.7	2959.0	2950.1	2944.7	2934.7	2941.9	2952.5	2968.8
16°	2918.2	2918.4	2924.2	2936.7	2943.3	2934.0	2927.0	2914.6	2921.6	2932.4	2951.7
17°	2898.1	2899.1	2905.1	2918.8	2926.8	2916.0	2907.5	2893.2	2901.3	2912.9	2934.5
18°	2875.6	2877.6	2885.4	2899.7	2908.3	2896.1	2886.8	2870.9	2879.6	2891.6	2914.4
19°	2852.0	2854.1	2864.9	2880.4	2888.4	2876.0	2866.1	2847.4	2856.3	2869.3	2894.7
20°	2827.3	2829.9	2842.6	2859.9	2868.3	2856.1	2844.2	2823.9	2831.9	2846.2	2874.0
21°	2801.2	2804.2	2819.1	2840.0	2847.2	2834.6	2821.5	2799.4	2806.4	2821.5	2852.4
22°	2774.1	2777.9	2795.2	2818.7	2826.3	2812.7	2797.2	2774.3	2779.9	2796.6	2829.7
23°	2745.9	2749.7	2769.6	2794.4	2804.2	2789.7	2772.9	2747.3	2752.2	2770.0	2806.4
24°	2717.0	2722.2	2742.9	2770.6	2781.3	2765.6	2747.5	2720.0	2722.8	2742.9	2782.5
25°	2687.6	2693.9	2716.2	2745.5	2757.2	2741.5	2721.2	2692.7	2694.1	2714.4	2757.4
26°	2656.9	2663.7	2687.6	2721.8	2733.5	2717.2	2694.5	2663.5	2662.5	2686.6	2731.7
27°	2624.1	2633.2	2659.1	2695.7	2708.1	2691.1	2667.1	2633.4	2631.0	2657.1	2705.7
28°	2591.8	2601.4	2629.5	2669.5	2682.6	2664.5	2639.0	2601.4	2598.0	2626.1	2678.0
29°	2557.2	2569.1	2600.0	2641.8	2656.7	2637.6	2610.1	2569.5	2564.8	2594.8	2650.1
30°	2522.8	2536.1	2568.9	2614.3	2630.0	2610.3	2578.9	2536.3	2530.3	2562.6	2620.5
31°	2488.3	2502.7	2537.9	2585.3	2603.0	2581.9	2547.5	2501.9	2496.3	2529.9	2591.4
32°	2451.3	2467.4	2506.7	2556.4	2574.7	2553.2	2516.0	2467.6	2460.1	2497.1	2560.8
33°	2414.9	2431.8	2473.6	2527.6	2545.5	2524.0	2482.8	2431.6	2422.5	2462.5	2529.5
34°	2377.5	2396.2	2441.4	2497.1	2516.8	2493.7	2449.7	2394.8	2385.5	2427.8	2498.9
35°	2339.1	2358.4	2408.9	2466.1	2487.9	2462.9	2416.1	2358.4	2345.8	2392.4	2466.5
36°	2300.9	2321.2	2374.5	2435.0	2459.3	2431.6	2381.5	2320.4	2306.6	2356.4	2433.4
37°	2261.9	2284.2	2339.7	2405.0	2429.6	2400.8	2345.8	2280.8	2266.6	2319.2	2400.2
38°	2221.9	2245.7	2303.9	2372.3	2400.6	2369.1	2311.0	2241.4	2226.2	2282.0	2366.5
39°	2182.1	2206.1	2268.4	2341.3	2370.1	2337.1	2274.2	2201.6	2185.4	2243.8	2332.1
40°	2143.0	2167.1	2230.2	2309.0	2338.7	2305.2	2237.6	2161.6	2143.8	2204.9	2297.9
41°	2102.4	2127.9	2194.4	2277.0	2307.2	2273.0	2200.4	2121.0	2102.2	2165.5	2262.3
42°	2060.1	2087.9	2156.4	2243.4	2275.6	2239.4	2162.2	2080.8	2060.1	2126.1	2226.2



TEST NUMBER: P861213

CATALOG NUMBER: 8APVTLD-SL3C3 MID POWER 3500K 120V

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
45°	1931.8	1964.1	2044.7	2141.7	2177.3	2136.5	2044.7	1954.4	1932.3	2005.2	2116.8
46°	1888.6	1922.3	2006.9	2107.8	2144.0	2103.4	2004.9	1911.6	1889.1	1963.4	2080.4
47°	1844.4	1879.9	1968.6	2073.0	2110.0	2067.0	1965.1	1869.2	1845.0	1922.2	2043.3
48°	1799.7	1836.9	1930.5	2037.4	2076.0	2032.2	1925.7	1826.2	1801.2	1880.2	2005.8
49°	1754.7	1793.1	1892.5	2001.6	2041.3	1995.8	1884.5	1782.1	1756.0	1837.9	1968.0
50°	1709.6	1750.0	1853.4	1965.1	2005.9	1959.1	1844.6	1738.3	1711.1	1794.6	1930.0
51°	1664.0	1705.9	1813.5	1929.6	1972.0	1923.1	1804.0	1693.9	1666.8	1752.3	1892.6
52°	1618.4	1661.7	1774.1	1893.4	1935.2	1886.8	1763.9	1649.8	1620.8	1707.8	1853.0
53°	1573.3	1617.5	1734.9	1858.1	1900.4	1849.5	1723.0	1605.2	1575.0	1665.7	1814.1
54°	1526.3	1573.0	1694.8	1821.0	1864.3	1811.3	1682.8	1560.4	1529.0	1621.5	1775.1
55°	1480.8	1528.3	1654.5	1782.2	1827.7	1773.8	1641.9	1515.4	1482.6	1577.3	1736.5
56°	1434.4	1484.1	1614.5	1744.9	1791.0	1735.1	1599.8	1470.4	1436.6	1532.9	1696.3
57°	1388.2	1439.3	1572.8	1706.4	1754.2	1697.0	1559.3	1424.5	1389.7	1488.7	1656.6
58°	1341.1	1393.9	1532.5	1667.6	1716.8	1658.8	1517.3	1378.8	1342.8	1444.9	1616.5
59°	1293.8	1348.6	1491.5	1628.0	1680.2	1619.2	1476.8	1333.3	1295.6	1400.7	1576.5
60°	1247.0	1304.0	1451.3	1588.8	1641.9	1580.0	1434.9	1287.8	1248.6	1357.0	1537.2
61°	1198.9	1260.0	1410.4	1549.5	1604.3	1541.2	1393.3	1241.7	1200.5	1311.5	1497.5
62°	1151.5	1215.6	1369.6	1510.2	1565.3	1500.9	1351.5	1195.9	1152.6	1267.6	1456.2
63°	1102.4	1170.6	1328.9	1471.5	1527.1	1461.4	1310.5	1150.4	1104.0	1224.2	1416.7
64°	1055.0	1125.2	1287.9	1432.8	1488.4	1421.3	1269.4	1105.2	1056.5	1179.1	1376.7
65°	1006.0	1080.6	1247.1	1393.8	1448.8	1381.5	1227.6	1060.2	1008.1	1134.4	1336.9
66°	957.2	1035.1	1206.2	1355.1	1410.3	1341.0	1185.2	1014.5	959.1	1090.1	1296.3
67°	908.8	990.2	1163.9	1315.6	1370.4	1300.6	1143.4	970.5	911.5	1046.8	1256.2
68°	860.6	946.0	1122.3	1275.1	1330.6	1261.2	1101.6	925.4	863.2	1002.0	1215.6
69°	812.2	901.8	1081.3	1234.6	1290.3	1220.2	1059.5	880.5	814.0	957.4	1174.7
70°	764.4	858.0	1040.1	1194.6	1250.4	1180.2	1017.6	836.5	766.5	913.1	1134.2
71°	715.5	813.5	999.1	1152.9	1210.3	1139.6	976.0	792.3	717.6	870.0	1093.9
72°	668.8	770.4	959.5	1110.6	1170.6	1100.0	935.0	748.8	669.7	827.0	1053.7
73°	621.1	727.7	919.1	1069.5	1129.8	1060.0	893.3	705.2	621.6	783.5	1012.9
74°	572.9	685.4	879.2	1027.8	1090.9	1020.6	853.8	662.2	573.9	741.2	972.5
75°	525.6	644.0	838.6	987.6	1050.7	980.3	813.1	619.7	527.0	698.9	931.9
76°	479.4	602.7	798.6	948.2	1011.4	940.8	774.1	577.6	480.1	657.1	891.0
77°	434.2	561.8	758.6	908.5	971.8	902.1	735.2	537.3	434.7	616.9	851.7
78°	389.4	522.9	718.7	870.8	932.2	862.7	695.8	498.0	390.0	577.7	811.6
79°	345.8	482.0	679.0	831.4	892.6	824.6	658.3	459.7	346.0	537.6	772.9
80°	303.5	444.6	640.8	794.4	855.7	787.2	621.0	421.6	303.8	499.4	735.7
81°	263.4	408.9	604.2	757.6	817.2	750.1	583.9	384.7	264.8	461.5	697.4
82°	224.1	374.1	568.3	719.9	782.5	715.3	549.2	349.2	225.0	424.1	660.2
83°	185.9	341.0	534.3	685.6	746.8	680.1	514.9	315.0	187.8	389.2	625.1
84°	152.6	309.1	502.4	652.2	714.1	648.7	483.3	283.5	153.5	354.6	591.6
85°	122.4	279.3	474.5	621.5	682.2	617.4	453.6	254.0	121.7	322.6	559.0
86°	95.6	253.1	447.4	592.6	653.7	588.7	425.7	227.3	94.0	292.7	527.0
87°	73.6	230.1	422.7	567.4	626.4	561.7	401.2	204.4	71.6	266.2	497.3



TEST NUMBER: P861213

CATALOG NUMBER: 8APVTLD-SL3C3 MID POWER 3500K 120V

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
90°	39.2	181.3	369.0	509.0	569.4	506.6	349.2	155.8	33.1	207.6	430.6
91°	37.3	171.4	355.9	493.3	552.4	490.0	335.0	146.4	30.8	195.2	413.8
92°	36.1	162.4	343.8	478.6	536.5	476.0	323.2	137.7	29.6	184.4	398.9
93°	35.2	153.3	331.2	465.1	521.4	461.0	311.8	129.3	28.8	173.8	384.5
94°	34.2	145.1	319.2	450.7	504.8	446.4	300.0	121.5	28.0	164.2	370.5
95°	33.6	136.6	307.4	437.5	490.4	432.6	288.4	113.7	27.6	154.4	356.1
96°	32.8	128.5	295.5	423.9	474.9	417.7	277.0	106.5	26.4	145.5	342.5
97°	32.0	121.0	284.0	410.2	461.1	404.5	267.1	99.5	26.0	136.5	329.2
98°	31.2	114.3	272.7	397.4	445.4	391.2	256.4	93.4	25.8	128.1	316.6
99°	30.6	107.5	262.4	384.7	431.3	378.3	245.9	87.1	25.6	120.3	303.8
100°	30.2	101.1	251.6	371.6	416.8	365.3	234.8	81.3	25.4	112.8	291.7
101°	30.2	95.2	240.8	358.9	403.3	352.2	224.7	76.1	25.2	105.6	280.0
102°	29.6	89.4	231.0	346.2	388.7	338.8	215.1	70.9	25.0	99.0	268.6
103°	29.2	83.8	220.8	333.3	376.5	326.6	206.2	65.9	24.8	92.4	257.8
104°	28.4	78.8	211.0	321.2	361.9	313.8	197.1	61.3	24.6	86.4	246.3
105°	28.0	73.9	202.2	309.1	349.7	302.9	187.8	56.9	24.4	81.0	235.4
106°	27.4	69.0	192.8	296.9	336.2	291.2	178.5	52.8	24.0	75.2	224.9
107°	27.0	65.0	184.0	285.0	323.7	280.3	169.7	48.5	23.2	70.0	214.5
108°	26.2	60.5	175.2	273.3	311.2	269.5	160.7	44.5	23.0	64.8	204.2
109°	25.8	56.1	167.1	262.8	299.3	259.1	152.7	41.4	23.0	60.4	194.6
110°	25.2	52.0	158.9	251.8	286.9	247.5	144.3	37.4	22.6	56.0	185.1
111°	24.8	48.3	151.3	240.7	275.4	237.0	136.9	34.2	22.2	51.2	176.0
112°	24.4	44.4	143.0	230.5	264.2	225.7	129.5	30.9	22.0	47.1	167.0
113°	24.2	40.8	135.4	220.1	253.0	215.2	121.9	28.0	21.7	43.2	158.4
114°	23.8	37.6	128.3	209.7	242.3	204.7	114.8	25.3	21.4	38.8	149.9
115°	23.4	34.3	121.0	200.2	230.6	194.3	107.8	23.1	21.1	35.3	141.5
116°	22.7	31.4	113.9	190.1	220.9	184.1	101.2	21.8	20.9	31.6	133.5
117°	22.2	28.9	107.2	181.1	209.6	175.1	95.2	21.0	20.8	28.6	125.8
118°	22.0	26.6	100.8	171.8	200.0	166.6	88.2	19.6	19.9	25.6	117.7
119°	21.4	24.9	93.9	162.7	190.0	157.8	82.4	19.2	19.3	23.0	110.7
120°	21.1	24.3	87.6	154.2	180.3	149.3	76.0	18.7	19.4	20.4	103.5
121°	20.5	23.7	81.5	145.8	170.4	140.2	69.9	18.3	18.5	19.3	96.3
122°	20.1	23.1	75.6	137.3	162.2	132.2	64.5	17.9	18.5	19.1	89.6
123°	19.3	22.7	70.0	129.2	152.3	124.0	59.4	17.4	18.1	19.1	82.5
124°	18.5	22.3	64.9	121.4	143.9	116.0	53.8	17.0	17.3	19.3	76.3
125°	18.1	21.9	59.2	113.7	134.1	108.4	48.7	16.8	16.9	18.9	70.2
126°	17.3	21.3	53.8	106.1	126.4	100.4	43.8	16.4	16.3	17.5	64.1
127°	17.1	20.9	48.8	98.4	117.9	93.0	39.1	16.2	16.1	16.3	58.9
128°	16.7	20.3	43.9	91.3	110.0	85.9	34.4	15.8	15.5	16.1	53.0
129°	16.3	19.7	39.3	84.2	101.7	78.4	30.3	15.2	15.1	15.9	47.5
130°	15.9	19.1	34.6	77.1	94.7	72.1	26.1	15.2	14.9	15.5	42.0
131°	15.3	18.9	30.5	70.4	86.1	65.0	22.2	15.4	13.7	15.3	37.0
132°	14.9	18.5	26.6	64.4	79.8	59.5	18.9	14.6	13.1	15.1	32.1



TEST NUMBER: P861213

CATALOG NUMBER: 8APVTLD-SL3C3 MID POWER 3500K 120V

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
135°	13.9	17.1	17.6	47.0	59.3	42.0	13.6	12.7	11.9	13.7	19.1
136°	13.7	16.5	17.2	41.3	52.6	36.7	12.8	12.3	11.5	13.1	15.6
137°	13.1	16.3	16.6	36.2	46.6	31.4	12.4	12.1	10.7	12.5	13.8
138°	12.9	15.7	16.2	31.2	40.5	27.0	12.0	12.1	10.5	12.1	13.2
139°	12.5	14.9	15.6	26.7	34.8	22.3	11.8	11.7	10.1	12.1	12.4
140°	12.5	14.7	15.2	22.2	29.5	18.2	11.4	11.7	10.1	12.3	12.2
141°	11.9	14.3	14.8	18.3	24.7	14.8	11.0	10.9	10.1	11.9	12.4
142°	11.7	14.1	14.4	15.7	19.4	12.4	10.4	10.1	10.0	11.1	11.4
143°	11.7	13.5	14.2	15.1	15.4	12.0	10.0	10.1	9.9	10.9	10.6
144°	11.1	13.3	13.8	14.7	12.0	12.0	9.4	9.7	9.8	10.7	10.2
145°	11.1	12.7	13.2	14.4	11.6	11.2	9.4	9.3	9.8	10.4	9.4
146°	10.9	12.5	13.0	13.9	10.8	10.8	9.5	9.2	9.7	10.2	9.0
147°	10.9	11.9	12.8	13.8	10.4	10.4	9.5	9.1	9.6	10.2	9.2
148°	10.5	11.7	12.4	13.6	10.2	10.2	9.5	9.1	9.6	10.2	8.8
149°	10.1	11.5	12.2	13.0	10.0	9.8	9.6	9.0	9.5	10.1	9.0
150°	10.1	11.1	11.6	13.0	9.8	9.8	9.0	8.9	9.4	10.1	9.0
151°	9.9	10.7	11.5	12.5	9.6	9.2	9.2	8.9	9.3	10.1	8.9
152°	9.7	10.7	11.4	12.2	9.4	9.4	9.2	8.9	9.3	10.1	8.9
153°	9.5	10.5	11.3	12.0	9.2	9.2	9.2	8.9	9.3	10.1	8.9
154°	9.3	10.3	11.2	11.6	9.0	9.2	9.2	8.9	9.3	10.0	8.9
155°	9.1	10.3	11.2	11.8	8.8	8.8	9.2	8.9	9.3	10.0	8.9
156°	9.1	10.3	11.2	11.2	8.7	8.6	9.2	8.9	9.3	10.0	8.8
157°	9.1	10.3	11.2	11.2	8.5	8.6	9.2	8.9	9.3	10.0	8.8
158°	9.1	10.3	11.2	11.1	8.4	8.6	9.2	8.9	9.3	10.0	9.1
159°	9.1	10.3	11.2	11.0	8.4	8.6	9.2	8.9	9.3	10.0	9.5
160°	9.1	10.3	11.2	10.9	8.4	8.6	9.2	8.9	9.3	9.9	9.8
161°	9.3	10.3	11.2	10.8	8.4	8.6	9.2	9.1	9.9	10.3	10.1
162°	9.5	10.3	11.2	10.7	8.4	8.6	9.2	10.1	11.1	10.9	10.4
163°	10.1	10.3	11.2	10.6	8.4	8.6	9.4	10.5	11.7	11.1	11.2
164°	10.5	10.3	11.2	10.4	8.4	8.6	9.4	10.9	12.1	11.7	11.6
165°	10.7	10.3	11.2	10.4	8.4	8.6	9.6	11.1	12.7	11.9	12.0
166°	11.7	10.5	11.2	10.3	8.4	8.6	9.7	11.2	12.9	12.5	12.0
167°	11.9	10.9	11.2	10.2	8.4	8.6	9.7	11.4	13.5	12.5	12.6
168°	12.0	11.7	11.2	10.1	8.4	8.6	9.8	11.6	14.1	12.5	13.2
169°	12.2	12.3	11.2	10.0	8.4	8.6	9.8	11.7	14.7	12.5	13.4
170°	12.3	12.1	11.2	9.9	8.4	8.6	9.9	11.9	15.3	12.5	13.4
171°	12.3	12.7	11.2	9.8	8.4	8.6	9.9	11.9	15.7	12.5	13.4
172°	12.3	12.7	11.2	9.8	8.4	8.6	10.0	12.0	16.1	12.5	13.5
173°	12.4	12.9	11.2	9.8	8.8	8.8	10.2	12.0	16.0	12.5	13.5
174°	12.4	13.0	11.2	9.7	8.6	9.0	10.6	12.1	15.9	12.5	13.5
175°	12.4	13.2	11.2	9.7	8.8	9.4	10.4	12.2	15.8	12.5	13.5
176°	12.5	13.4	11.4	9.7	9.4	9.4	10.4	12.2	15.8	12.5	13.6
177°	12.5	13.5	11.4	9.6	9.6	9.6	10.4	12.3	15.7	12.5	13.6

TEST NUMBER: P861213
CATALOG NUMBER: 8APVTLD-SL3C3 MID POWER 3500K 120V

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°	202.5°	225°
180°	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5



TEST NUMBER: P861213

CATALOG NUMBER: 8APVTLD-SL3C3 MID POWER 3500K 120V

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
0°	3087.0	3087.0	3087.0	3087.0	3087.0	3087.0
1°	3086.8	3088.0	3088.4	3087.6	3086.8	3087.2
2°	3086.4	3087.8	3088.8	3087.8	3087.0	3086.4
3°	3085.2	3088.0	3089.0	3087.8	3084.2	3083.2
4°	3082.4	3085.4	3086.4	3085.2	3080.0	3077.8
5°	3078.8	3081.4	3082.4	3082.6	3074.3	3071.7
6°	3073.9	3075.9	3077.4	3078.4	3067.1	3063.9
7°	3068.5	3069.9	3071.3	3072.9	3058.9	3054.6
8°	3061.7	3063.3	3064.3	3065.9	3049.0	3044.6
9°	3053.6	3056.0	3056.9	3058.1	3038.2	3033.5
10°	3045.2	3047.6	3048.4	3048.6	3025.5	3020.7
11°	3036.0	3038.8	3039.4	3038.8	3011.8	3006.4
12°	3024.9	3028.7	3028.7	3027.3	2997.2	2990.7
13°	3013.6	3017.3	3017.3	3014.2	2981.3	2974.0
14°	3000.8	3005.0	3005.2	2999.6	2964.0	2956.8
15°	2987.3	2992.1	2992.7	2984.1	2946.3	2937.7
16°	2972.8	2977.7	2978.7	2967.0	2927.0	2918.2
17°	2957.4	2962.6	2963.8	2949.9	2907.5	2898.1
18°	2941.1	2946.5	2946.7	2931.0	2887.8	2875.6
19°	2924.2	2930.0	2929.4	2911.5	2865.3	2852.0
20°	2904.5	2911.7	2910.5	2891.6	2841.8	2827.3
21°	2884.6	2893.6	2891.0	2870.5	2817.1	2801.2
22°	2864.3	2874.8	2871.1	2848.4	2792.2	2774.1
23°	2843.8	2854.7	2849.8	2823.7	2765.2	2745.9
24°	2821.9	2835.0	2827.9	2799.4	2737.5	2717.0
25°	2798.4	2813.7	2804.6	2773.9	2709.3	2687.6
26°	2774.9	2791.3	2780.9	2746.1	2680.6	2656.9
27°	2750.5	2768.4	2755.4	2718.4	2650.3	2624.1
28°	2726.2	2743.9	2731.9	2690.7	2618.9	2591.8
29°	2700.9	2720.2	2706.3	2661.3	2587.3	2557.2
30°	2675.0	2695.1	2681.0	2631.6	2554.4	2522.8
31°	2648.6	2669.1	2654.1	2601.0	2520.2	2488.3
32°	2622.1	2642.6	2627.9	2569.5	2486.4	2451.3
33°	2594.2	2616.1	2600.2	2537.3	2451.3	2414.9
34°	2565.8	2588.7	2571.7	2505.5	2415.5	2377.5
35°	2536.9	2560.2	2542.7	2472.4	2379.1	2339.1
36°	2509.0	2534.1	2512.4	2438.8	2342.3	2300.9
37°	2478.6	2505.1	2482.4	2404.6	2305.0	2261.9
38°	2447.9	2477.0	2450.5	2369.1	2267.2	2221.9
39°	2418.3	2448.3	2421.7	2333.5	2228.4	2182.1
40°	2387.6	2418.7	2389.8	2298.1	2189.4	2143.0
41°	2356.8	2388.8	2358.2	2261.9	2149.8	2102.4
42°	2325.0	2357.6	2326.1	2224.2	2110.6	2060.1



TEST NUMBER: P861213

CATALOG NUMBER: 8APVTLD-SL3C3 MID POWER 3500K 120V

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
45°	2228.2	2262.5	2226.0	2111.8	1989.0	1931.8
46°	2195.0	2229.6	2192.6	2072.6	1947.1	1888.6
47°	2161.2	2196.8	2157.6	2034.4	1904.4	1844.4
48°	2128.5	2163.3	2122.9	1995.8	1863.1	1799.7
49°	2094.7	2130.3	2089.1	1957.0	1820.2	1754.7
50°	2060.1	2098.5	2052.5	1917.8	1777.8	1709.6
51°	2024.6	2064.2	2017.5	1878.6	1733.9	1664.0
52°	1989.9	2031.8	1980.2	1839.2	1690.4	1618.4
53°	1954.0	1998.3	1945.2	1799.2	1647.3	1573.3
54°	1918.3	1963.7	1908.6	1759.4	1602.8	1526.3
55°	1882.6	1929.9	1870.5	1719.8	1559.9	1480.8
56°	1846.2	1895.3	1834.8	1679.7	1515.0	1434.4
57°	1809.3	1860.4	1796.4	1639.6	1471.4	1388.2
58°	1772.6	1823.4	1758.2	1599.8	1426.6	1341.1
59°	1734.4	1787.4	1719.9	1559.6	1381.9	1293.8
60°	1697.4	1751.7	1681.9	1518.7	1336.2	1247.0
61°	1659.3	1714.1	1643.7	1478.0	1291.4	1198.9
62°	1620.2	1677.7	1604.9	1438.2	1246.7	1151.5
63°	1582.3	1639.7	1566.2	1397.0	1201.3	1102.4
64°	1543.5	1602.3	1527.4	1355.6	1156.4	1055.0
65°	1504.7	1564.3	1488.6	1314.9	1111.7	1006.0
66°	1466.1	1525.9	1449.9	1274.1	1067.3	957.2
67°	1426.6	1488.1	1410.2	1232.5	1022.1	908.8
68°	1386.8	1448.8	1370.5	1190.8	976.9	860.6
69°	1346.8	1410.2	1330.7	1149.6	932.5	812.2
70°	1306.6	1370.8	1291.9	1108.0	888.4	764.4
71°	1266.4	1331.2	1252.5	1066.7	843.9	715.5
72°	1226.8	1293.0	1212.5	1025.7	800.5	668.8
73°	1186.9	1252.9	1172.3	984.1	756.7	621.1
74°	1147.4	1213.0	1132.2	943.4	713.1	572.9
75°	1107.8	1170.4	1093.0	901.9	670.4	525.6
76°	1069.2	1126.5	1053.5	861.8	628.2	479.4
77°	1030.4	1084.4	1014.0	821.1	586.1	434.2
78°	990.6	1040.2	974.5	781.3	545.6	389.4
79°	951.9	998.0	934.7	742.1	505.5	345.8
80°	912.4	957.1	895.8	704.5	466.2	303.5
81°	875.0	915.6	857.3	667.7	427.5	263.4
82°	837.9	875.9	818.5	631.9	391.2	224.1
83°	801.1	837.8	782.2	596.7	355.8	185.9
84°	766.7	801.4	745.5	563.0	322.7	152.6
85°	732.6	766.5	711.3	530.8	292.4	122.4
86°	700.6	734.5	679.3	500.5	264.7	95.6
87°	669.8	702.9	649.0	472.9	238.5	73.6



TEST NUMBER: P861213

CATALOG NUMBER: 8APVTLD-SL3C3 MID POWER 3500K 120V

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
90°	597.0	628.6	575.6	405.1	180.3	39.2
91°	577.3	608.4	555.4	388.4	169.3	37.3
92°	560.4	590.2	537.9	373.8	159.8	36.1
93°	543.6	573.5	522.0	360.1	150.6	35.2
94°	527.5	557.5	505.2	345.7	141.4	34.2
95°	511.1	541.0	488.9	332.1	133.0	33.6
96°	494.0	525.5	474.0	320.2	124.8	32.8
97°	478.1	510.5	458.9	308.6	116.7	32.0
98°	462.4	494.8	444.7	296.7	109.7	31.2
99°	446.5	480.1	430.6	284.7	102.6	30.6
100°	431.4	466.2	415.5	272.3	95.9	30.2
101°	416.6	451.7	400.6	261.5	90.0	30.2
102°	401.4	438.0	386.4	250.9	84.3	29.6
103°	387.5	424.5	372.3	240.0	78.8	29.2
104°	372.4	411.2	359.0	229.0	74.0	28.4
105°	358.8	397.9	347.0	218.4	68.6	28.0
106°	344.7	385.6	335.3	208.4	64.4	27.4
107°	331.1	372.1	323.2	198.4	59.9	27.0
108°	317.9	358.4	310.5	189.3	55.8	26.2
109°	305.2	344.9	297.4	179.8	51.8	25.8
110°	292.7	331.3	285.6	170.7	47.7	25.2
111°	280.9	318.1	273.2	162.1	44.2	24.8
112°	269.1	305.4	261.7	154.0	40.7	24.4
113°	257.6	293.0	250.4	145.4	37.6	24.2
114°	246.3	280.5	239.3	137.5	34.5	23.8
115°	234.9	269.4	228.5	130.1	31.7	23.4
116°	223.9	257.4	217.8	122.4	29.1	22.7
117°	213.7	245.8	207.4	115.2	27.1	22.2
118°	202.9	234.2	197.0	108.2	26.1	22.0
119°	192.8	223.7	187.7	101.3	25.5	21.4
120°	182.7	212.6	177.5	94.8	24.9	21.1
121°	172.8	202.0	168.1	88.4	24.3	20.5
122°	164.1	191.9	159.0	82.2	23.9	20.1
123°	154.0	181.7	149.8	76.0	23.5	19.3
124°	145.4	171.7	141.0	70.1	23.5	18.5
125°	136.6	162.5	132.5	64.6	22.9	18.1
126°	127.8	153.1	124.2	59.0	22.3	17.3
127°	119.6	143.7	115.7	53.5	21.8	17.1
128°	111.1	134.8	107.7	48.4	21.4	16.7
129°	103.0	126.0	99.8	43.5	20.6	16.3
130°	95.1	117.3	91.7	38.8	20.4	15.9
131°	87.5	108.7	84.6	34.3	19.6	15.3
132°	80.1	100.6	77.3	30.0	19.2	14.9



TEST NUMBER: P861213

CATALOG NUMBER: 8APVTLD-SL3C3 MID POWER 3500K 120V

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
135°	59.6	77.3	57.7	19.6	17.6	13.9
136°	52.9	70.0	51.5	19.0	17.4	13.7
137°	46.8	63.3	45.8	18.2	16.8	13.1
138°	40.8	57.1	40.1	17.8	16.4	12.9
139°	34.6	50.3	34.7	17.2	15.8	12.5
140°	29.2	44.0	29.6	16.8	15.2	12.5
141°	24.4	38.3	24.9	16.6	14.8	11.9
142°	19.0	32.7	20.7	16.0	14.4	11.7
143°	15.0	27.2	17.2	15.4	14.1	11.7
144°	12.4	22.4	16.5	15.0	13.5	11.1
145°	12.4	18.3	16.1	14.4	13.1	11.1
146°	12.2	16.1	15.9	14.0	12.7	10.9
147°	12.4	15.7	15.3	13.8	12.5	10.9
148°	11.4	15.5	15.0	13.2	12.3	10.5
149°	11.0	15.1	14.8	12.8	12.1	10.1
150°	10.4	14.5	14.4	12.4	11.7	10.1
151°	10.2	14.3	14.0	12.2	11.5	9.9
152°	9.4	14.1	13.8	12.2	11.3	9.7
153°	9.2	13.3	13.2	11.8	10.9	9.5
154°	9.2	13.1	13.0	11.8	11.1	9.3
155°	8.6	12.9	12.8	11.8	11.1	9.1
156°	8.7	12.7	12.6	11.8	11.1	9.1
157°	8.7	12.5	12.4	11.8	11.1	9.1
158°	8.8	12.3	12.2	11.8	11.1	9.1
159°	8.9	12.2	12.0	11.8	11.1	9.1
160°	8.9	11.9	12.0	11.8	11.1	9.1
161°	9.0	11.6	12.0	11.8	11.1	9.3
162°	9.0	11.4	11.6	11.8	11.1	9.5
163°	9.6	11.4	11.2	11.8	11.3	10.1
164°	9.8	11.1	11.4	11.8	11.7	10.5
165°	10.0	10.8	11.4	11.8	11.9	10.7
166°	10.2	11.0	11.4	11.9	11.9	11.7
167°	10.4	10.6	11.4	11.9	12.3	11.9
168°	10.8	10.6	11.3	12.0	12.5	12.0
169°	11.0	10.4	11.3	12.0	12.7	12.2
170°	10.8	10.4	11.3	12.0	13.1	12.3
171°	10.8	10.2	11.3	12.0	13.3	12.3
172°	11.0	10.2	11.2	12.1	13.7	12.3
173°	11.4	9.8	10.6	12.1	14.2	12.4
174°	11.8	9.6	10.6	12.1	14.4	12.4
175°	12.2	9.6	10.4	12.2	14.8	12.4
176°	12.0	9.6	10.4	12.2	15.4	12.5
177°	12.0	9.6	10.4	12.2	15.4	12.5



TEST NUMBER: P861213
CATALOG NUMBER: 8APVTLD-SL3C3 MID POWER 3500K 120V

CANDELA DISTRIBUTION (continued):

	247.5°	270°	292.5°	315°	337.5°	360°
180°	12.5	12.5	12.5	12.5	12.5	12.5



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180° - - 45°-225° - - - - 90°-270° - · - 135°-315°







43°	2018.3	2047.7	2119.4	2209.9	2242.6	2205.3	2123.5	2038.8	2017.3	2086.1	2190.2
44°	1975.2	2005.9	2081.9	2176.3	2210.5	2171.1	2084.5	1996.8	1975.4	2045.9	2153.4



88°	55.2	209.8	401.9	545.2	605.1	541.2	381.1	184.9	53.6	243.9	471.3
89°	44.3	192.7	382.9	524.8	585.2	521.6	363.1	167.9	40.4	224.4	449.2



133°	14.3	17.7	22.9	58.2	72.2	53.4	15.6	13.7	12.7	14.3	27.7
134°	14.1	17.3	19.4	52.4	65.5	47.3	14.0	13.1	12.1	14.1	23.3



178°	12.5	13.5	11.8	9.6	9.6	9.6	10.4	12.5	15.5	12.5	13.6
179°	12.5	13.5	12.2	9.6	9.6	9.6	10.4	12.1	15.5	12.5	13.6





43°	2293.3	2327.1	2293.5	2187.4	2071.4	2018.3
44°	2260.7	2294.5	2260.3	2149.4	2030.4	1975.2



88°	643.1	675.9	621.8	447.7	216.1	55.2
89°	617.1	651.2	596.8	425.2	196.3	44.3



133°	73.0	92.7	70.4	26.2	18.6	14.3
134°	66.1	84.9	64.0	22.5	18.2	14.1



178°	12.0	9.6	10.4	12.2	15.4	12.5
179°	12.0	9.6	10.4	12.2	15.4	12.5



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

METALUX

Report Number: SP1-2210-820-6

Test Date: 11/10/2022

Luminaire Tested: 4APVTLD-SL3C3

Data in this report applies to families of products including 4APVTLD-SL3C3.

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2210-820-6
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 11/10/2022
 Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
 Product Line: METALUX
 Catalog Number: **4APVTLD-SL3C3**
 Description: METALUX

0.1699(@277V) [AT MAX POWER AND 5000K]

Spectral Parameters

CCT (K): 3408
 CIE u' : 0.2372
 CIE v' : 0.5156
 Duv: 0.0019
 CIE x: 0.4126
 CIE y: 0.3987
 CIE z: 0.1887
 Peak Wavelength (nm): 601
 Dominant Wavelength (nm): 580
 Purity: 43.7


CRI (Ra): 83.5
 R1: 81.8
 R2: 91.2
 R3: 96.7
 R4: 81.5
 R5: 81.9
 R6: 88.8
 R7: 84.5
 R8: 61.7

R9: 8.7
 R10: 79.8
 R11: 80.9
 R12: 67.5
 R13: 84.2
 R14: 98.7

Rf: 85.3
 Rg: 94.4

Test Conditions

Stabilization Time: 49M
 Operation Time: 12H
 Room Temperature (°C) / RH%: 24.0/40%
 Sphere Temperature (°C): 24.6

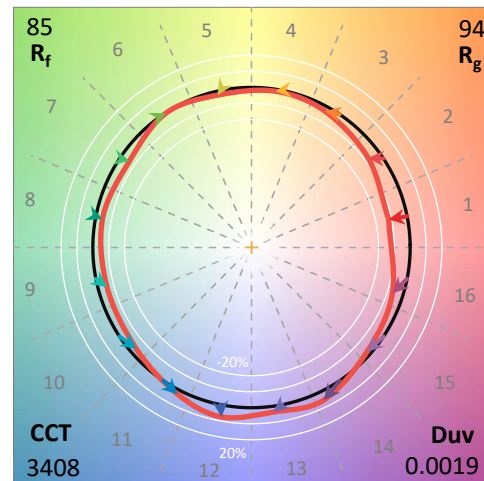


REPORT NUMBER: SP1-2210-820-6


Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	76INCH SPHERE IN0058	8/8/2022	2/8/2023
Power Meter	XITRON 2801 IN0071	11/29/2021	11/29/2022
AC Power Source	CHROMA 61603 IN0063	11/29/2021	11/29/2022
DC Power Source	AGILENT E3634A IN0208	11/29/2021	11/29/2022
Sphere Thermometer	ONSET IN0085	11/29/2021	11/29/2022
Room Thermometer	ONSET IN0046	11/29/2021	11/29/2022

REPORT NUMBER: SP1-2210-820-6

CIE 1931 Chromaticity Diagram

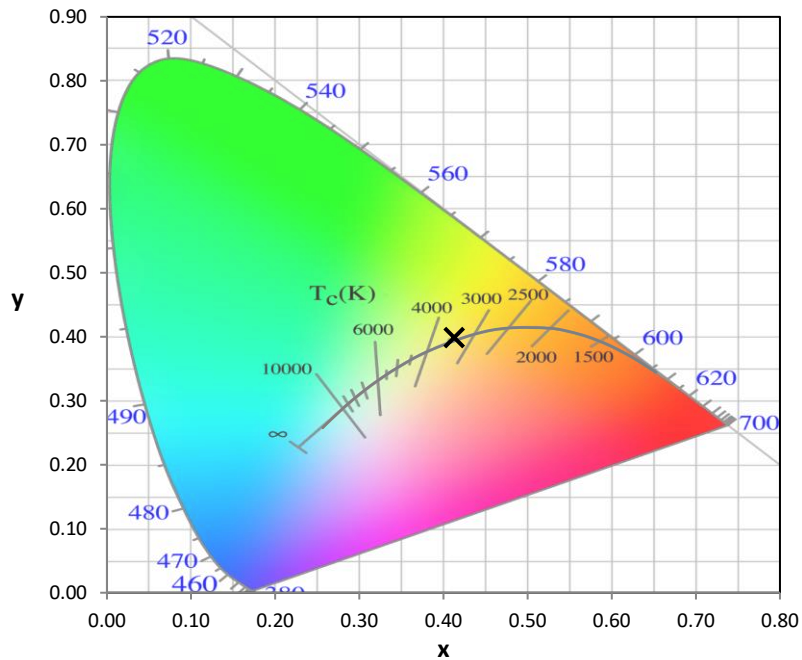


CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles

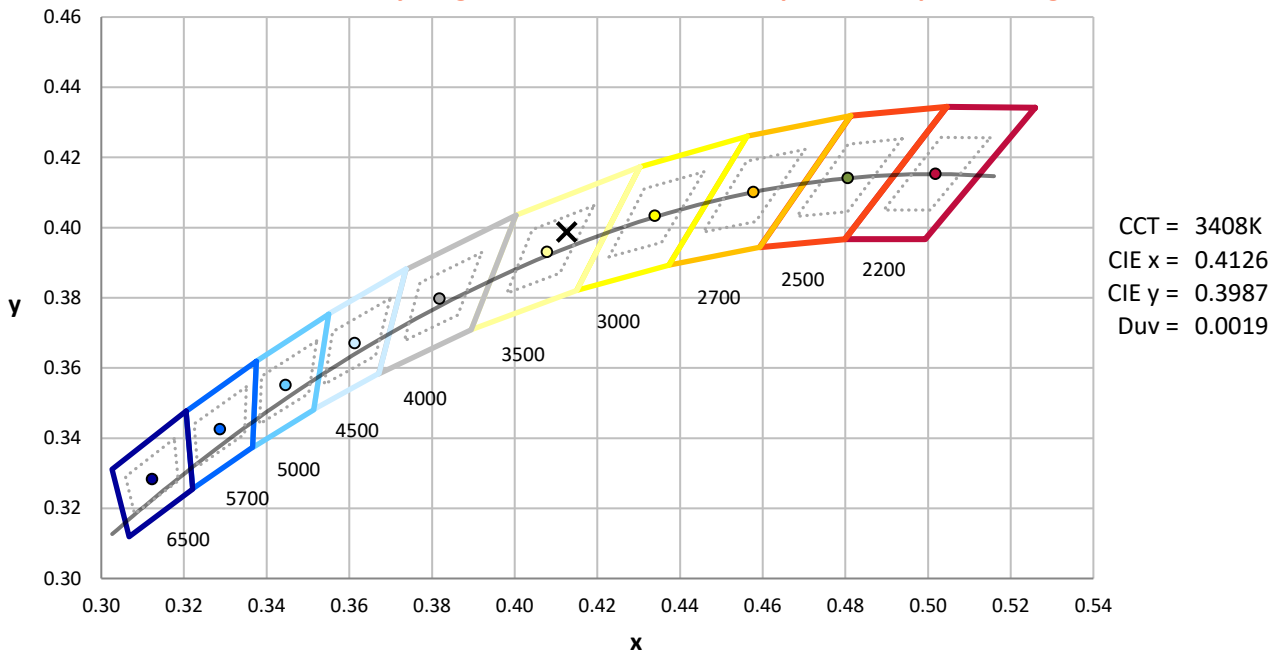

Point lies inside the ANSI 3500K 4-step quadrangle

REPORT NUMBER: SP1-2210-820-6

Photopic Flux vs. Wavelength

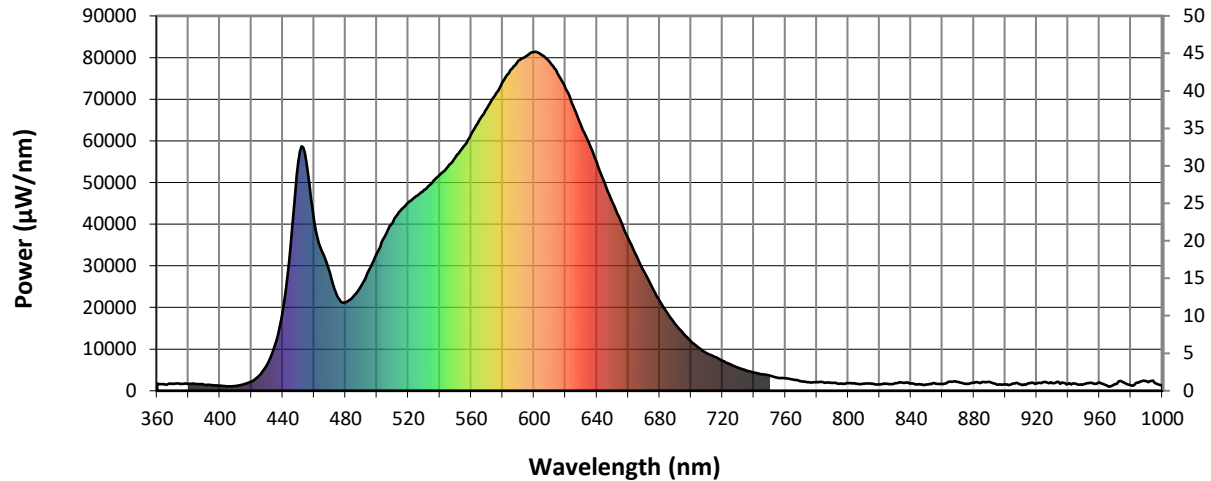


#####

λ (nm)	Power (μW/nm)	Lumens (Φ/nm)	λ (nm)	Power (μW/nm)	Lumens (Φ/nm)	λ (nm)	Power (μW/nm)	Lumens (Φ/nm)	λ (nm)	Power (μW/nm)	Lumens (Φ/nm)	λ (nm)	Power (μW/nm)	Lumens (Φ/nm)
360	1712	NR	490	25279	NR	620	72559	NR	750	3648	NR	880	1885	NR
365	1481	NR	495	28999	NR	625	68344	NR	755	3136	NR	885	2021	NR
370	1644	NR	500	33056	NR	630	63583	NR	760	2998	NR	890	2108	NR
375	1623	NR	505	37033	NR	635	59493	NR	765	2676	NR	895	1427	NR
380	1645	NR	510	40418	NR	640	54727	NR	770	2297	NR	900	1507	NR
385	1621	NR	515	43259	NR	645	49751	NR	775	2015	NR	905	1745	NR
390	1416	NR	520	45270	NR	650	45175	NR	780	2057	NR	910	1518	NR
395	1335	NR	525	46700	NR	655	40856	NR	785	1931	NR	915	1797	NR
400	1171	NR	530	48195	NR	660	36522	NR	790	1888	NR	920	1751	NR
405	1087	NR	535	49899	NR	665	32492	NR	795	1719	NR	925	2148	NR
410	1128	NR	540	51817	NR	670	28639	NR	800	1850	NR	930	1788	NR
415	1537	NR	545	53742	NR	675	24935	NR	805	1695	NR	935	1669	NR
420	2184	NR	550	56068	NR	680	21545	NR	810	1670	NR	940	1689	NR
425	3633	NR	555	58585	NR	685	18549	NR	815	1706	NR	945	1665	NR
430	6234	NR	560	61564	NR	690	15988	NR	820	1546	NR	950	1581	NR
435	10932	NR	565	64869	NR	695	13736	NR	825	1698	NR	955	1871	NR
440	19071	NR	570	67781	NR	700	11828	NR	830	1806	NR	960	1959	NR
445	34944	NR	575	70790	NR	705	10309	NR	835	1898	NR	965	1234	NR
450	55079	NR	580	74093	NR	710	8996	NR	840	1728	NR	970	1554	NR
455	55014	NR	585	77038	NR	715	8158	NR	845	1560	NR	975	2051	NR
460	40875	NR	590	79245	NR	720	7196	NR	850	1537	NR	980	1293	NR
465	33423	NR	595	80333	NR	725	6341	NR	855	1800	NR	985	1966	NR
470	28260	NR	600	81356	NR	730	5528	NR	860	1572	NR	990	2266	NR
475	22526	NR	605	80555	NR	735	4932	NR	865	2177	NR	995	1885	NR
480	21265	NR	610	78876	NR	740	4365	NR	870	2099	NR	1000	1088	NR
485	22618	NR	615	76232	NR	745	3964	NR	875	1631	NR			

REPORT NUMBER: SP1-2210-820-6

Scotopic Flux vs. Wavelength

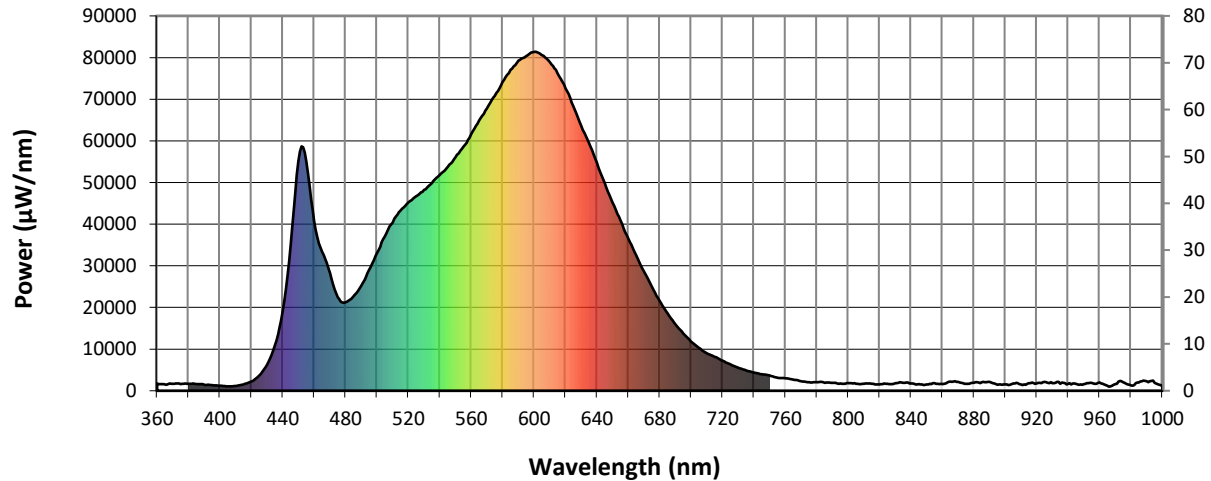


Scotopic Lumens: 6512.6

S/P: 1.52

λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)
360	1712	NR	490	25279	NR	620	72559	NR	750	3648	NR	880	1885	NR
365	1481	NR	495	28999	NR	625	68344	NR	755	3136	NR	885	2021	NR
370	1644	NR	500	33056	NR	630	63583	NR	760	2998	NR	890	2108	NR
375	1623	NR	505	37033	NR	635	59493	NR	765	2676	NR	895	1427	NR
380	1645	NR	510	40418	NR	640	54727	NR	770	2297	NR	900	1507	NR
385	1621	NR	515	43259	NR	645	49751	NR	775	2015	NR	905	1745	NR
390	1416	NR	520	45270	NR	650	45175	NR	780	2057	NR	910	1518	NR
395	1335	NR	525	46700	NR	655	40856	NR	785	1931	NR	915	1797	NR
400	1171	NR	530	48195	NR	660	36522	NR	790	1888	NR	920	1751	NR
405	1087	NR	535	49899	NR	665	32492	NR	795	1719	NR	925	2148	NR
410	1128	NR	540	51817	NR	670	28639	NR	800	1850	NR	930	1788	NR
415	1537	NR	545	53742	NR	675	24935	NR	805	1695	NR	935	1669	NR
420	2184	NR	550	56068	NR	680	21545	NR	810	1670	NR	940	1689	NR
425	3633	NR	555	58585	NR	685	18549	NR	815	1706	NR	945	1665	NR
430	6234	NR	560	61564	NR	690	15988	NR	820	1546	NR	950	1581	NR
435	10932	NR	565	64869	NR	695	13736	NR	825	1698	NR	955	1871	NR
440	19071	NR	570	67781	NR	700	11828	NR	830	1806	NR	960	1959	NR
445	34944	NR	575	70790	NR	705	10309	NR	835	1898	NR	965	1234	NR
450	55079	NR	580	74093	NR	710	8996	NR	840	1728	NR	970	1554	NR
455	55014	NR	585	77038	NR	715	8158	NR	845	1560	NR	975	2051	NR
460	40875	NR	590	79245	NR	720	7196	NR	850	1537	NR	980	1293	NR
465	33423	NR	595	80333	NR	725	6341	NR	855	1800	NR	985	1966	NR
470	28260	NR	600	81356	NR	730	5528	NR	860	1572	NR	990	2266	NR
475	22526	NR	605	80555	NR	735	4932	NR	865	2177	NR	995	1885	NR
480	21265	NR	610	78876	NR	740	4365	NR	870	2099	NR	1000	1088	NR
485	22618	NR	615	76232	NR	745	3964	NR	875	1631	NR			

REPORT NUMBER: SP1-2210-820-6

Melanopic Flux vs. Wavelength

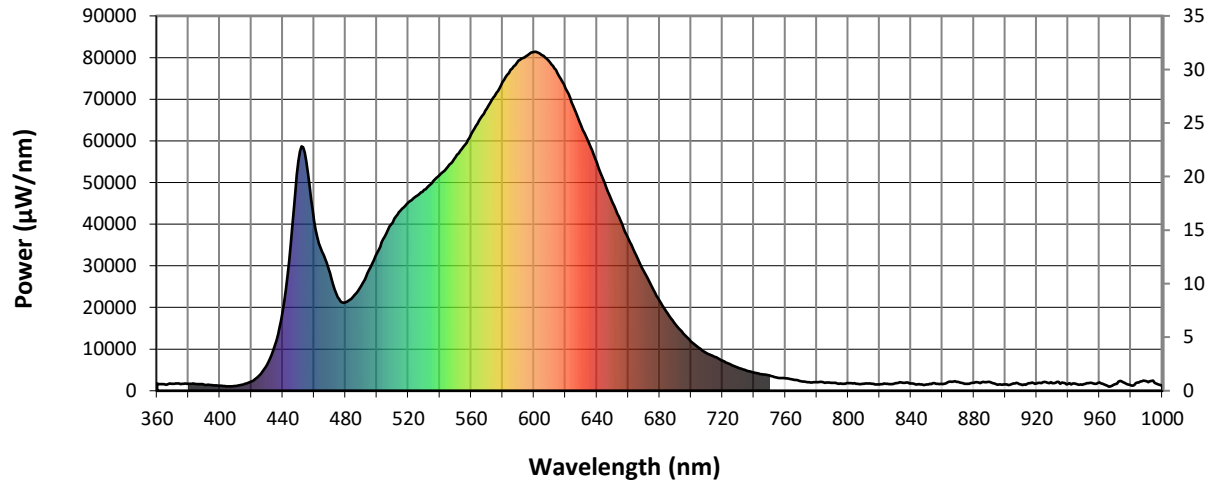

Melanopic Lumens: 2558.7 S/P: 0.6


λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)	λ (nm)	Power (μW/nm)	Lumens (φ/nm)
360	1712	NR	490	25279	NR	620	72559	NR	750	3648	NR	880	1885	NR
365	1481	NR	495	28999	NR	625	68344	NR	755	3136	NR	885	2021	NR
370	1644	NR	500	33056	NR	630	63583	NR	760	2998	NR	890	2108	NR
375	1623	NR	505	37033	NR	635	59493	NR	765	2676	NR	895	1427	NR
380	1645	NR	510	40418	NR	640	54727	NR	770	2297	NR	900	1507	NR
385	1621	NR	515	43259	NR	645	49751	NR	775	2015	NR	905	1745	NR
390	1416	NR	520	45270	NR	650	45175	NR	780	2057	NR	910	1518	NR
395	1335	NR	525	46700	NR	655	40856	NR	785	1931	NR	915	1797	NR
400	1171	NR	530	48195	NR	660	36522	NR	790	1888	NR	920	1751	NR
405	1087	NR	535	49899	NR	665	32492	NR	795	1719	NR	925	2148	NR
410	1128	NR	540	51817	NR	670	28639	NR	800	1850	NR	930	1788	NR
415	1537	NR	545	53742	NR	675	24935	NR	805	1695	NR	935	1669	NR
420	2184	NR	550	56068	NR	680	21545	NR	810	1670	NR	940	1689	NR
425	3633	NR	555	58585	NR	685	18549	NR	815	1706	NR	945	1665	NR
430	6234	NR	560	61564	NR	690	15988	NR	820	1546	NR	950	1581	NR
435	10932	NR	565	64869	NR	695	13736	NR	825	1698	NR	955	1871	NR
440	19071	NR	570	67781	NR	700	11828	NR	830	1806	NR	960	1959	NR
445	34944	NR	575	70790	NR	705	10309	NR	835	1898	NR	965	1234	NR
450	55079	NR	580	74093	NR	710	8996	NR	840	1728	NR	970	1554	NR
455	55014	NR	585	77038	NR	715	8158	NR	845	1560	NR	975	2051	NR
460	40875	NR	590	79245	NR	720	7196	NR	850	1537	NR	980	1293	NR
465	33423	NR	595	80333	NR	725	6341	NR	855	1800	NR	985	1966	NR
470	28260	NR	600	81356	NR	730	5528	NR	860	1572	NR	990	2266	NR
475	22526	NR	605	80555	NR	735	4932	NR	865	2177	NR	995	1885	NR
480	21265	NR	610	78876	NR	740	4365	NR	870	2099	NR	1000	1088	NR
485	22618	NR	615	76232	NR	745	3964	NR	875	1631	NR			

REPORT NUMBER: SP1-2210-820-6





TM-30-18

Summary

$R_f = 85.3$
 $R_g = 94.4$
 CIE $R_a = 83.5$
 $R_g = 8.7$

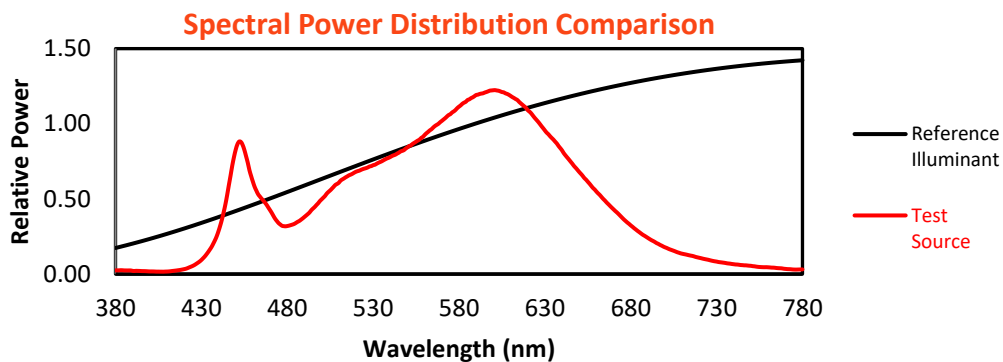

Color Vector Graphics

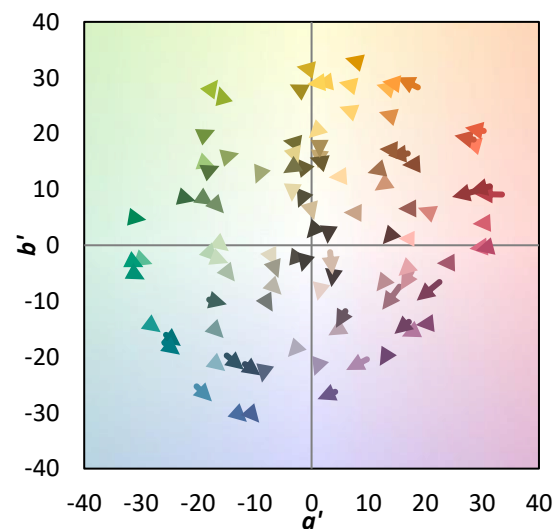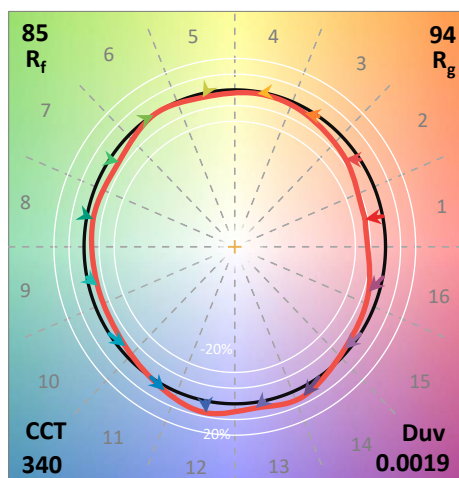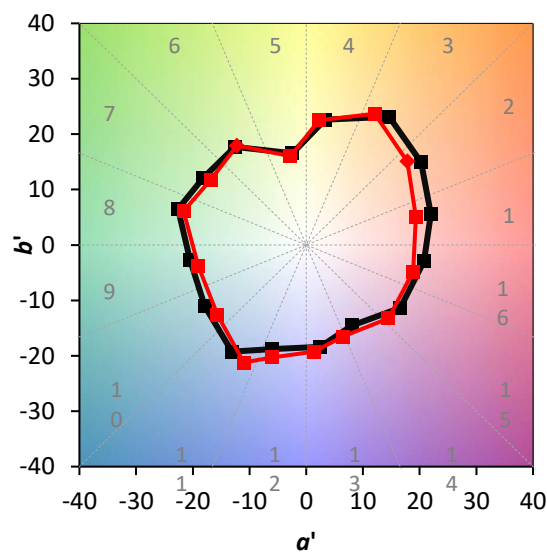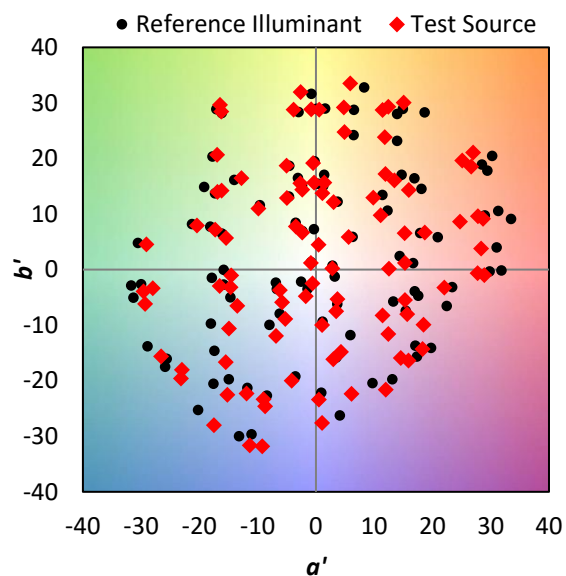


REPORT NUMBER: SP1-2210-820-6

TM-30-18

Individual Sample Fidelity Index ($R_{f,i}$)




CES01 = 86	CES26 = 88	CES51 = 93	CES76 = 82
CES02 = 62	CES27 = 91	CES52 = 94	CES77 = 85
CES03 = 31	CES28 = 95	CES53 = 90	CES78 = 81
CES04 = 70	CES29 = 93	CES54 = 89	CES79 = 92
CES05 = 49	CES30 = 91	CES55 = 87	CES80 = 90
CES06 = 51	CES31 = 94	CES56 = 86	CES81 = 76
CES07 = 41	CES32 = 87	CES57 = 84	CES82 = 96
CES08 = 40	CES33 = 97	CES58 = 85	CES83 = 95
CES09 = 29	CES34 = 93	CES59 = 91	CES84 = 91
CES10 = 75	CES35 = 96	CES60 = 90	CES85 = 77
CES11 = 58	CES36 = 81	CES61 = 87	CES86 = 71
CES12 = 64	CES37 = 96	CES62 = 83	CES87 = 85
CES13 = 43	CES38 = 85	CES63 = 87	CES88 = 88
CES14 = 74	CES39 = 98	CES64 = 80	CES89 = 77
CES15 = 71	CES40 = 96	CES65 = 78	CES90 = 90
CES16 = 47	CES41 = 96	CES66 = 77	CES91 = 73
CES17 = 50	CES42 = 98	CES67 = 76	CES92 = 65
CES18 = 56	CES43 = 93	CES68 = 81	CES93 = 79
CES19 = 72	CES44 = 99	CES69 = 85	CES94 = 64
CES20 = 66	CES45 = 94	CES70 = 79	CES95 = 74
CES21 = 86	CES46 = 91	CES71 = 73	CES96 = 84
CES22 = 78	CES47 = 95	CES72 = 91	CES97 = 90
CES23 = 92	CES48 = 83	CES73 = 74	CES98 = 86
CES24 = 90	CES49 = 92	CES74 = 91	CES99 = 77
CES25 = 72	CES50 = 93	CES75 = 77	

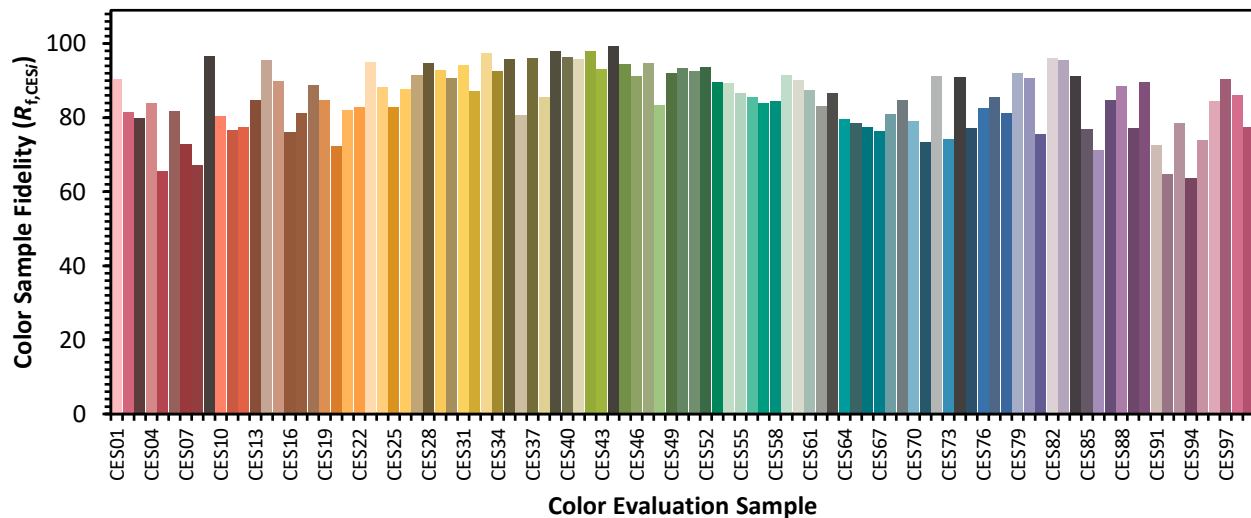

REPORT NUMBER: SP1-2210-820-6

TM-30-18



Color Rendition by Hue-Angle Bin

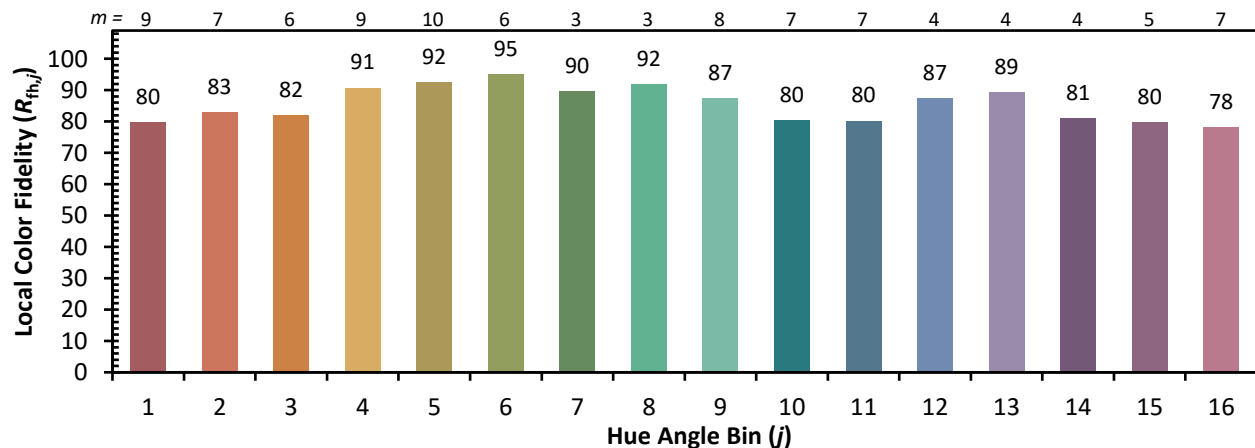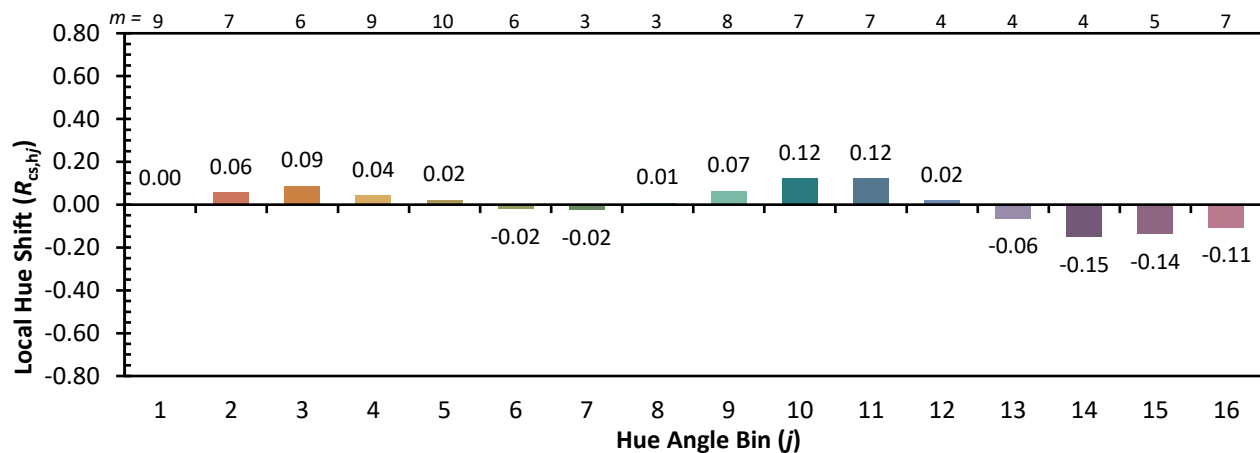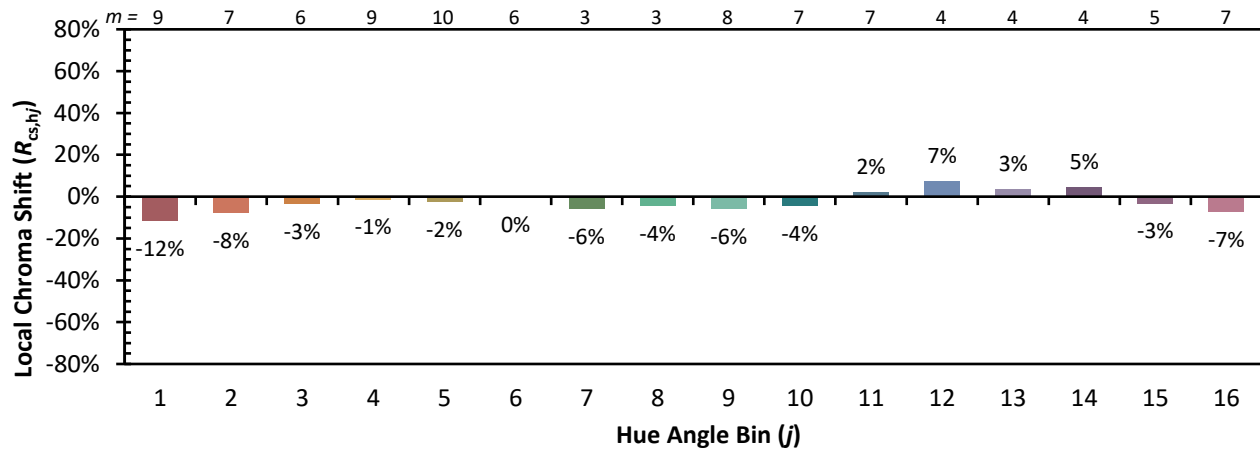

REPORT NUMBER: SP1-2210-820-6

TM-30-18

Measure Comparisons

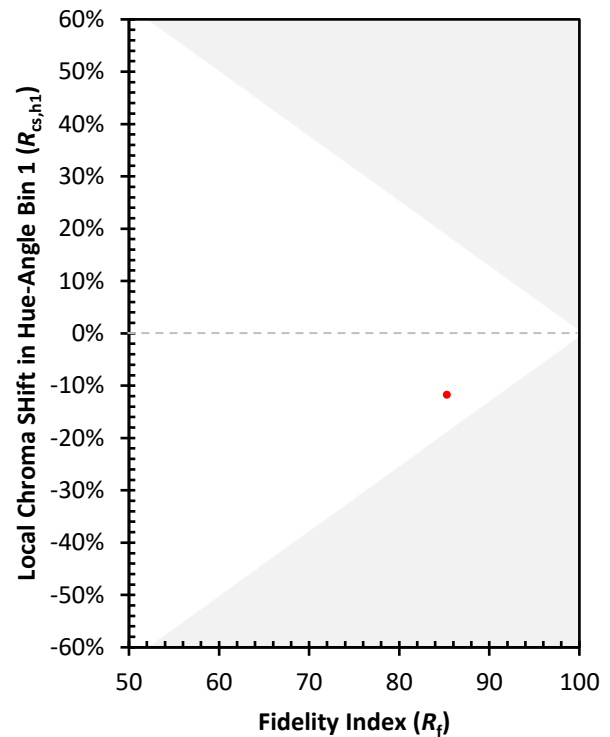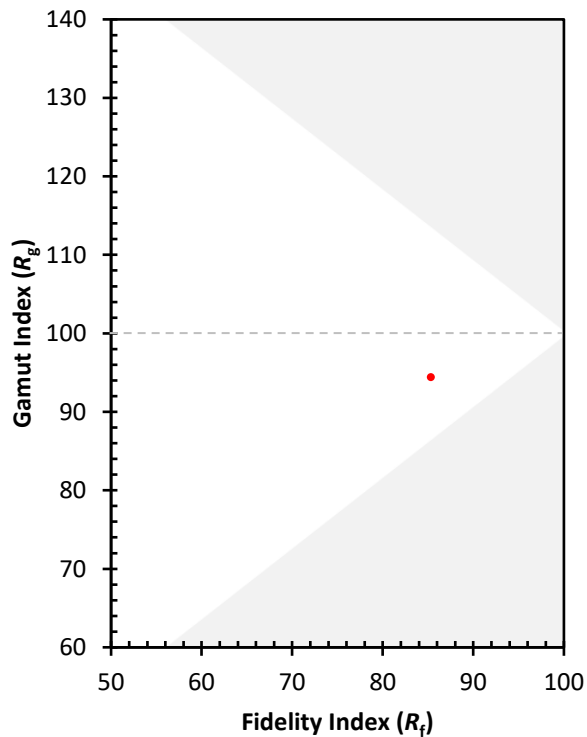

(END OF REPORT)