

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P572215

Luminaire Tested: **FLD4C-10-D010 FEU4C-X-90-30 F4X-M-X-H-BL84**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P572215
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-10-D010 FEU4C-X-90-30 F4X-M-X-H-BL84
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 3000K, 90 CRI LEDS, 4LBMH TRIM
AND BOTTOM LENS, 0.125" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 701.0 lumens
Efficiency: N/A
Efficacy: 71.9 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.75
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P572215

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-30 F4X-M-X-H-BL84

Luminous Intensity Polar Plot

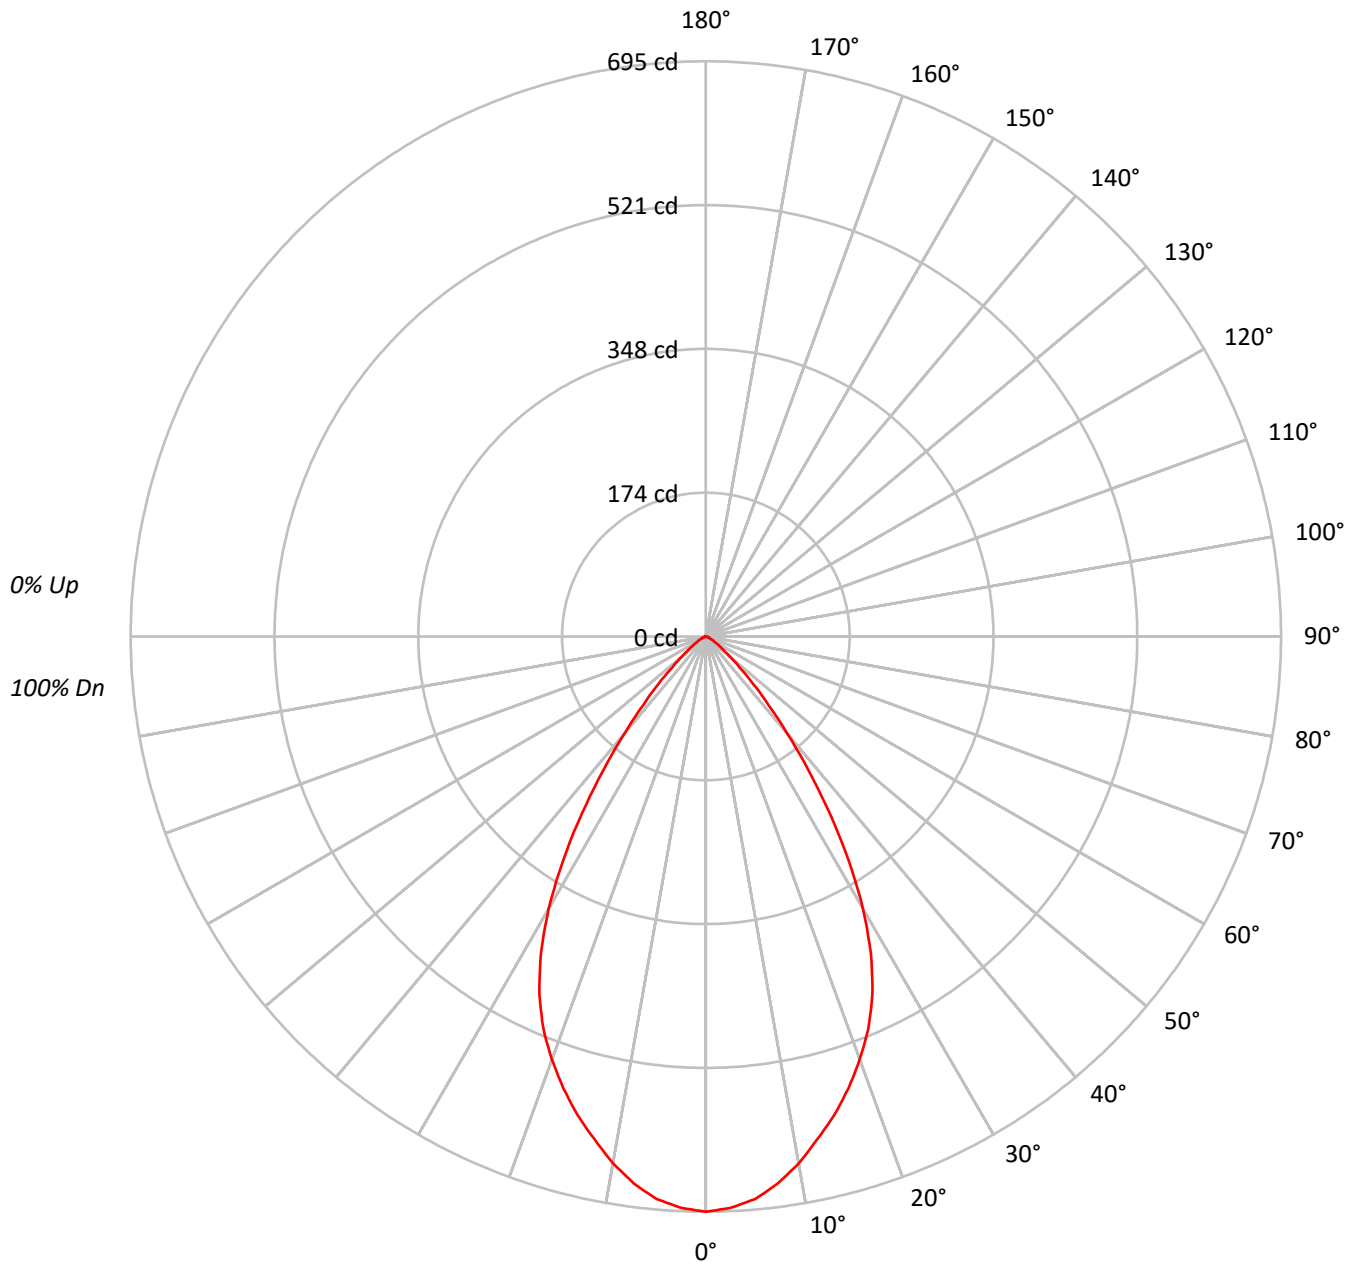



TEST NUMBER: P572215

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-30 F4X-M-X-H-BL84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	108	105		111	108	106	104		104	102	100		100	99	97		97	96	95
2	107	102	98	94		105	100	96	93		97	94	91		94	91	89		91	89	87
3	101	94	89	85		99	93	88	84		90	86	83		88	84	82		86	83	80
4	96	88	82	77		94	86	81	77		84	80	76		82	78	75		80	77	74
5	90	82	75	71		89	81	75	70		79	74	70		77	73	69		75	72	69
6	86	76	70	65		84	75	69	65		74	68	64		72	68	64		71	67	64
7	81	71	65	60		80	70	64	60		69	64	60		68	63	59		67	62	59
8	77	67	60	56		75	66	60	56		65	59	56		64	59	55		63	58	55
9	73	63	56	52		72	62	56	52		61	56	52		60	55	52		59	55	52
10	69	59	53	49		68	59	53	49		58	52	49		57	52	48		56	52	48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	85395
5°	84155
10°	80638
15°	76160
20°	71095
25°	64537
30°	53878
35°	39039
40°	24441
45°	13969
50°	7282
55°	4091
60°	2604
65°	1541
70°	1149
75°	522
80°	778
85°	0



TEST NUMBER: P572215

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-30 F4X-M-X-H-BL84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	64.0	9.1
10°-20°	167.8	23.9
20°-30°	215.6	30.8
30°-40°	162.2	23.1
40°-50°	65.2	9.3
50°-60°	18.6	2.6
60°-70°	5.9	0.8
70°-80°	1.7	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	447.4	63.8
0°-40°	609.6	87.0
0°-60°	693.3	98.9
0°-90°	701.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	701.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	695	
5°	682	64
15°	599	168
25°	476	216
35°	260	162
45°	80	65
55°	19	19
65°	5	6
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P572215

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-30 F4X-M-X-H-BL84

CANDELA DISTRIBUTION (FULL):

	0°
0°	695.1
2.5°	690.9
5°	682.4
7.5°	666.5
10°	646.4
12.5°	622.1
15°	598.8
17.5°	572.4
20°	543.8
22.5°	513.1
25°	476.1
27.5°	431.6
30°	379.8
32.5°	321.6
35°	260.3
37.5°	203.1
40°	152.4
42.5°	112.1
45°	80.4
47.5°	55.0
50°	38.1
52.5°	26.5
55°	19.1
57.5°	13.8
60°	10.6
62.5°	7.4
65°	5.3
67.5°	4.2
70°	3.2
72.5°	2.1
75°	1.1
77.5°	1.1
80°	1.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)