

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P572263

Luminaire Tested: **FLD4C-10-D010 FEU4C-X-90-35 F4X-N-X-H-BL84**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P572263
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207666)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-10-D010 FEU4C-X-90-35 F4X-N-X-H-BL84
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 3500K, 90 CRI LEDS, 4LBNH TRIM
AND BOTTOM LENS, 0.125" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 591.0 lumens
Efficiency: N/A
Efficacy: 60.6 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.75
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P572263

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-35 F4X-N-X-H-BL84

Luminous Intensity Polar Plot

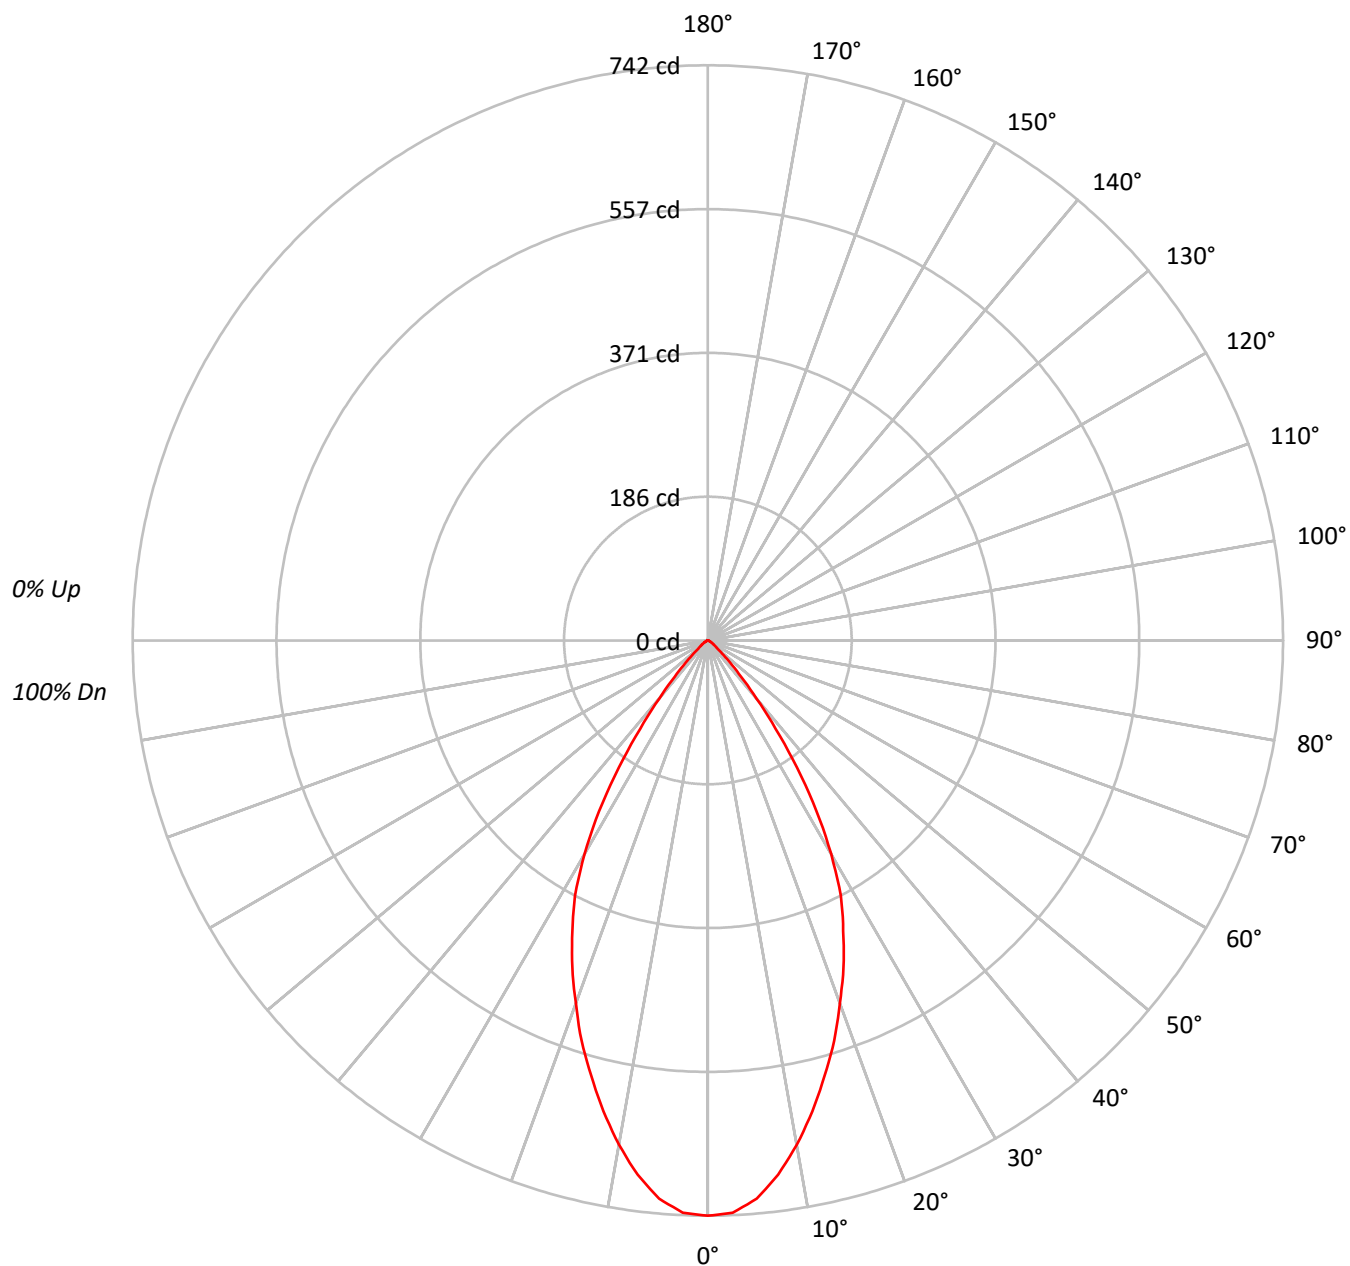



TEST NUMBER: P572263

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-35 F4X-N-X-H-BL84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	111	108	106		111	109	106	104		105	103	101		101	99	98		97	96	95
2	108	103	99	96		106	101	98	94		98	95	92		95	93	90		92	90	89
3	102	96	91	87		100	95	90	86		92	88	85		90	86	84		87	85	82
4	97	90	84	80		95	89	83	79		86	82	78		84	81	78		83	79	77
5	92	84	78	74		91	83	78	73		81	76	73		80	75	72		78	74	72
6	88	79	73	69		86	78	72	68		77	72	68		75	71	67		74	70	67
7	83	74	68	64		82	73	68	64		72	67	63		71	66	63		70	66	63
8	79	70	64	60		78	69	64	60		68	63	59		67	63	59		66	62	59
9	76	66	60	56		74	65	60	56		65	59	56		64	59	56		63	59	55
10	72	62	57	53		71	62	56	53		61	56	53		60	56	52		60	55	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	91157
5°	89125
10°	82409
15°	73947
20°	65094
25°	56024
30°	45111
35°	30025
40°	15620
45°	7071
50°	3077
55°	2056
60°	1327
65°	930
70°	754
75°	522
80°	0
85°	0



TEST NUMBER: P572263

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-35 F4X-N-X-H-BL84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.9	11.3
10°-20°	162.4	27.5
20°-30°	188.5	31.9
30°-40°	124.9	21.1
40°-50°	35.0	5.9
50°-60°	8.8	1.5
60°-70°	3.3	0.6
70°-80°	1.1	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	417.9	70.7
0°-40°	542.7	91.8
0°-60°	586.6	99.2
0°-90°	591.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	591.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	742	
5°	723	67
15°	581	162
25°	413	189
35°	200	125
45°	41	35
55°	10	9
65°	3	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P572263

CATALOG NUMBER: FLD4C-10-D010 FEU4C-X-90-35 F4X-N-X-H-BL84

CANDELA DISTRIBUTION (FULL):

	0°
0°	742.0
2.5°	738.8
5°	722.7
7.5°	694.9
10°	660.6
12.5°	622.1
15°	581.4
17.5°	541.8
20°	497.9
22.5°	457.2
25°	413.3
27.5°	371.5
30°	318.0
32.5°	261.3
35°	200.2
37.5°	143.5
40°	97.4
42.5°	63.2
45°	40.7
47.5°	24.6
50°	16.1
52.5°	11.8
55°	9.6
57.5°	7.5
60°	5.4
62.5°	4.3
65°	3.2
67.5°	2.1
70°	2.1
72.5°	1.1
75°	1.1
77.5°	1.1
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)