Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P571701

Luminaire Tested: **FLD4C-02-D010 FEU4C-X-90-30 F4X-W-X-H-BL86**

Issue Date: 3/1/2023

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Test Information

Test Method:	LM-79-08
Report Number:	P571701
	TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab:	INNOVATION CENTER-P3
Issue Date:	3/1/2023
Manufacturer:	COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line:	FAIL-SAFE
Catalog Number:	FLD4C-02-D010 FEU4C-X-90-30 F4X-W-X-H-BL86
Description:	4 INCH FAIL-SAFE LED DOWNLIGHT WITH 3000K, 90 CRI LEDS, 4LBWH TRIM AND BOTTOM LENS, 0.250" CLEAR POLYCARBONATE
Light Source:	-
Ballast/Driver:	-

Summary

Lumens per Lamp:	N/A
Luminaire Lumens:	246.0 lumens
Efficiency:	N/A
Efficacy:	70.3 lumens/watt
Spacing Criteria (0/90/45):	1.17 / 1.17 / 1.13
Luminous Opening:	Circular (Dia: 0.33' x H: 0')
CIE Type:	Direct
Input Watts (W):	3.5
Input Voltage (V):	NR
Input Current (Ain):	NR
Voltage Rise (V):	NR
Power Factor:	NR
Total Harmonic Distortion (THDi):	NR
Frequency (hertz):	60
Stabilization Time:	NR
Operation Time:	NR
Ambient Temperature (°C):	NR
Test Distance:	25 FT

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P571701
CATALOG NUMBER: FLD4C-02-D010 FEU4C-X-90-30 F4X-W-X-H-BL86

Luminous Intensity Polar Plot

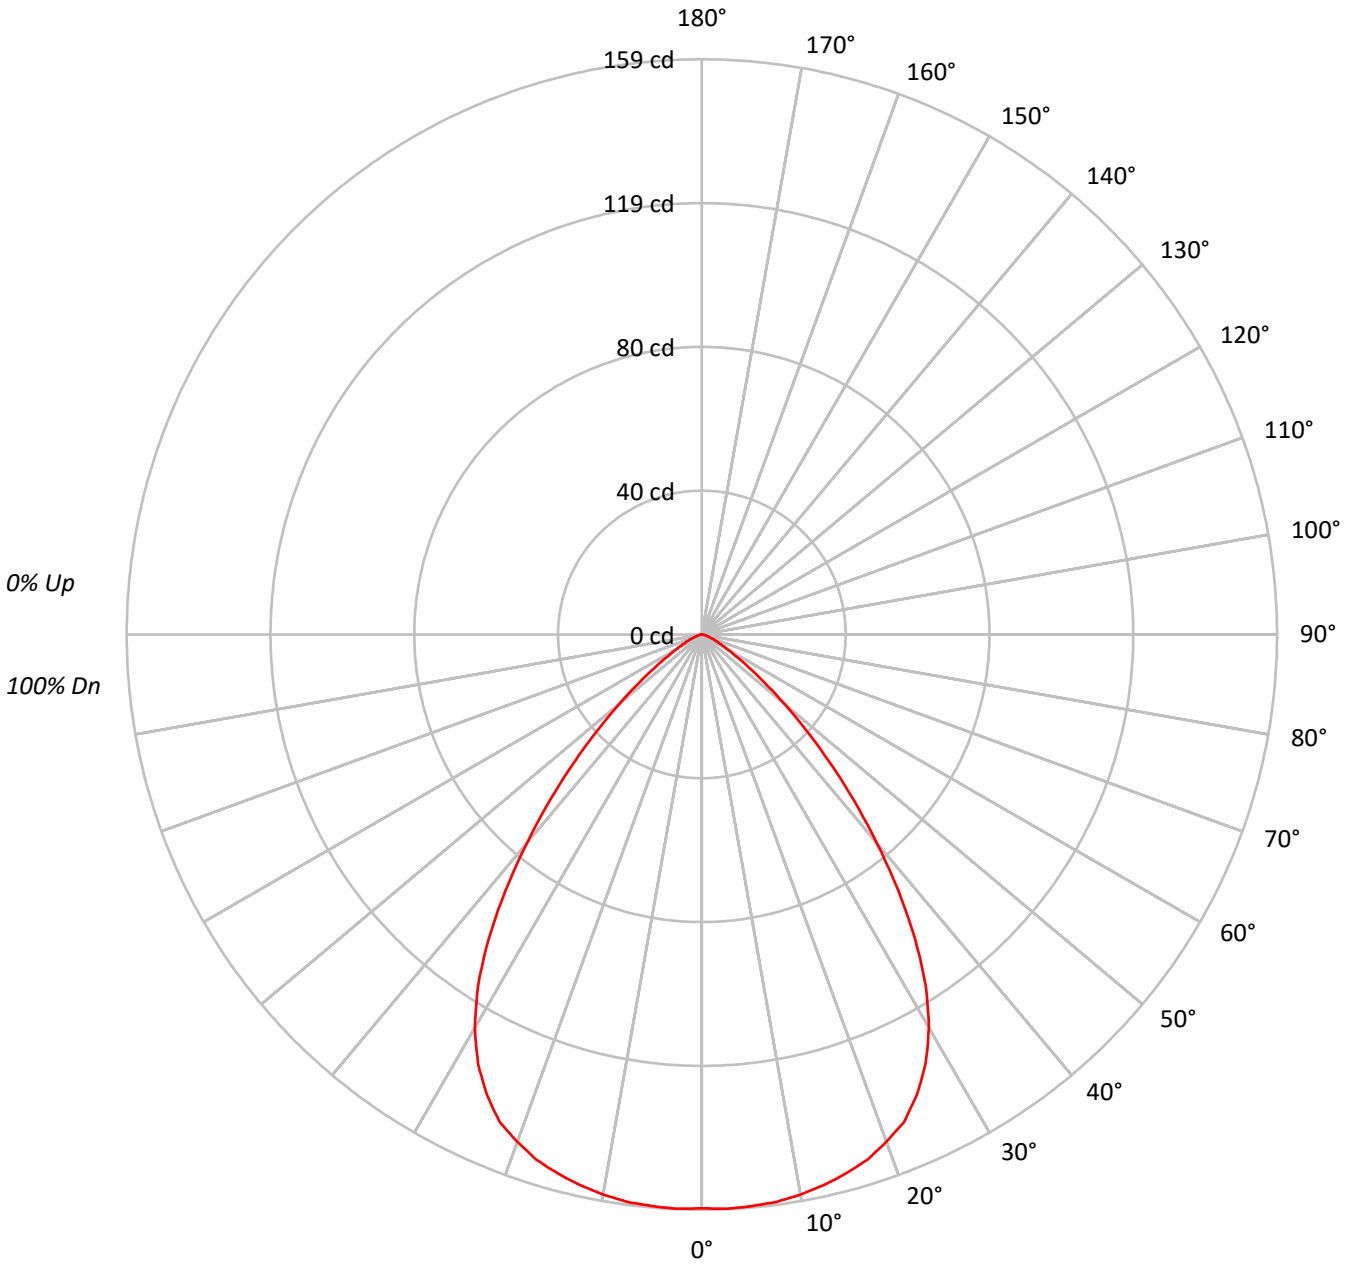

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P571701
CATALOG NUMBER: FLD4C-02-D010 FEU4C-X-90-30 F4X-W-X-H-BL86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20			20			20			20
RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91
2	105	100	95	91	103	98	93	90	95	91	88	91	88	86	89	86	84	82
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	62	61
6	81	71	64	58	80	70	63	58	68	62	58	67	61	57	65	61	57	55
7	76	65	58	53	75	65	58	53	63	57	53	62	56	52	61	56	52	50
8	72	60	53	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46
9	68	56	49	45	66	56	49	45	55	49	44	54	48	44	53	48	44	43
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	19485
5°	19559
10°	19610
15°	19612
20°	19506
25°	19045
30°	17803
35°	15418
40°	12044
45°	8635
50°	5619
55°	3363
60°	1966
65°	1250
70°	826
75°	617
80°	495
85°	0

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P571701
CATALOG NUMBER: FLD4C-02-D010 FEU4C-X-90-30 F4X-W-X-H-BL86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	15.1	6.1
10°-20°	43.5	17.7
20°-30°	64.2	26.1
30°-40°	63.4	25.8
40°-50°	38.8	15.8
50°-60°	14.9	6.0
60°-70°	4.6	1.9
70°-80°	1.4	0.6
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	122.8	49.9
0°-40°	186.2	75.7
0°-60°	239.8	97.5
0°-90°	246.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	246.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	159	
5°	159	15
15°	154	44
25°	140	64
35°	103	63
45°	50	39
55°	16	15
65°	4	5
75°	1	1
85°	0	0
90°	0	

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P571701
CATALOG NUMBER: FLD4C-02-D010 FEU4C-X-90-30 F4X-W-X-H-BL86

CANDELA DISTRIBUTION (FULL):

	0°
0°	158.6
2.5°	158.9
5°	158.6
7.5°	158.2
10°	157.2
12.5°	155.9
15°	154.2
17.5°	152.2
20°	149.2
22.5°	145.9
25°	140.5
27.5°	133.9
30°	125.5
32.5°	115.2
35°	102.8
37.5°	89.1
40°	75.1
42.5°	62.1
45°	49.7
47.5°	38.7
50°	29.4
52.5°	21.7
55°	15.7
57.5°	11.0
60°	8.0
62.5°	6.0
65°	4.3
67.5°	3.3
70°	2.3
72.5°	1.7
75°	1.3
77.5°	0.7
80°	0.7
82.5°	0.3
85°	0.0
87.5°	0.0
90°	0.0

Report Generated By 670246072 / DESKTOP-MV3F9LC

0°-180°

(END OF REPORT)