

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P572738

Luminaire Tested: **FLD4C-25-D010 FEU4C-X-90-27 F4X-N-X-LI-BL85**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P572738
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-25-D010 FEU4C-X-90-27 F4X-N-X-LI-BL85
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 4LBNLI TRIM
AND BOTTOM LENS, 0.187" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1562.0 lumens
Efficiency: N/A
Efficacy: 49.6 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 31.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P572738

CATALOG NUMBER: FLD4C-25-D010 FEU4C-X-90-27 F4X-N-X-LI-BL85

Luminous Intensity Polar Plot

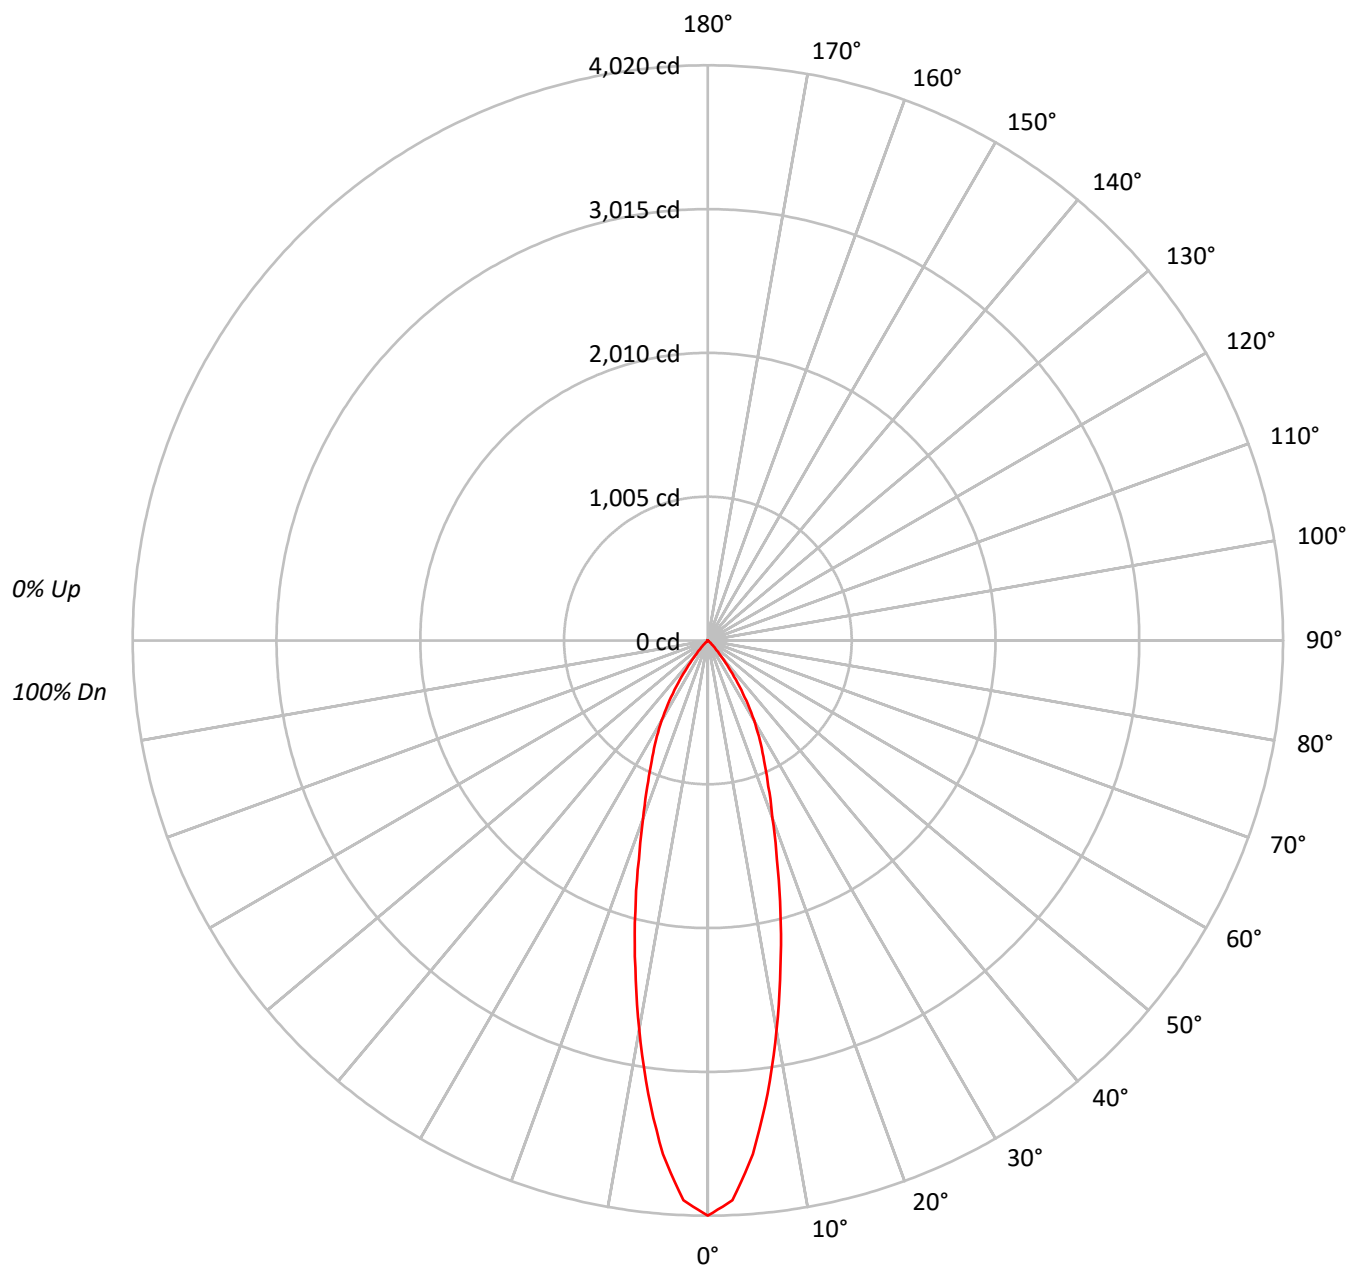



TEST NUMBER: P572738

CATALOG NUMBER: FLD4C-25-D010 FEU4C-X-90-27 F4X-N-X-LI-BL85

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95
3	105	99	95	92	103	98	94	91	95	92	89		93	90	88		91
4	101	94	89	86	99	93	88	85	91	87	84		89	86	83		87
5	96	89	84	80	95	88	84	80	87	82	79		85	81	79		83
6	92	85	80	76	91	84	79	76	83	78	75		81	78	75		80
7	89	81	76	72	88	80	75	72	79	75	71		78	74	71		77
8	85	77	72	68	84	77	72	68	76	71	68		75	71	68		74
9	82	74	69	65	81	73	68	65	72	68	65		72	68	65		71
10	79	71	66	62	78	70	65	62	69	65	62		69	65	62		68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	493834
5°	444394
10°	344506
15°	249351
20°	172653
25°	125875
30°	91456
35°	54111
40°	22757
45°	7089
50°	917
55°	514
60°	590
65°	698
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P572738

CATALOG NUMBER: FLD4C-25-D010 FEU4C-X-90-27 F4X-N-X-LI-BL85

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	316.8	20.3
10°-20°	542.3	34.7
20°-30°	431.0	27.6
30°-40°	228.2	14.6
40°-50°	39.3	2.5
50°-60°	2.9	0.2
60°-70°	1.5	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1290.1	82.6
0°-40°	1518.3	97.2
0°-60°	1560.5	99.9
0°-90°	1562.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1562.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4020	
5°	3604	317
15°	1960	542
25°	929	431
35°	361	228
45°	41	39
55°	2	3
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P572738

CATALOG NUMBER: FLD4C-25-D010 FEU4C-X-90-27 F4X-N-X-LI-BL85

CANDELA DISTRIBUTION (FULL):

	0°
0°	4019.7
2.5°	3916.2
5°	3603.5
7.5°	3194.6
10°	2761.6
12.5°	2343.0
15°	1960.5
17.5°	1604.5
20°	1320.6
22.5°	1104.1
25°	928.6
27.5°	786.6
30°	644.7
32.5°	500.4
35°	360.8
37.5°	238.2
40°	141.9
42.5°	81.8
45°	40.8
47.5°	14.5
50°	4.8
52.5°	4.8
55°	2.4
57.5°	2.4
60°	2.4
62.5°	2.4
65°	2.4
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)