

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P572901

Luminaire Tested: **FLD4C-30-D010 FEU4C-X-90-27 F4X-M-X-H-BL86**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P572901
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-30-D010 FEU4C-X-90-27 F4X-M-X-H-BL86
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 4LBMH TRIM
AND BOTTOM LENS, 0.250" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1900.0 lumens
Efficiency: N/A
Efficacy: 60.1 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 31.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P572901

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-27 F4X-M-X-H-BL86

Luminous Intensity Polar Plot

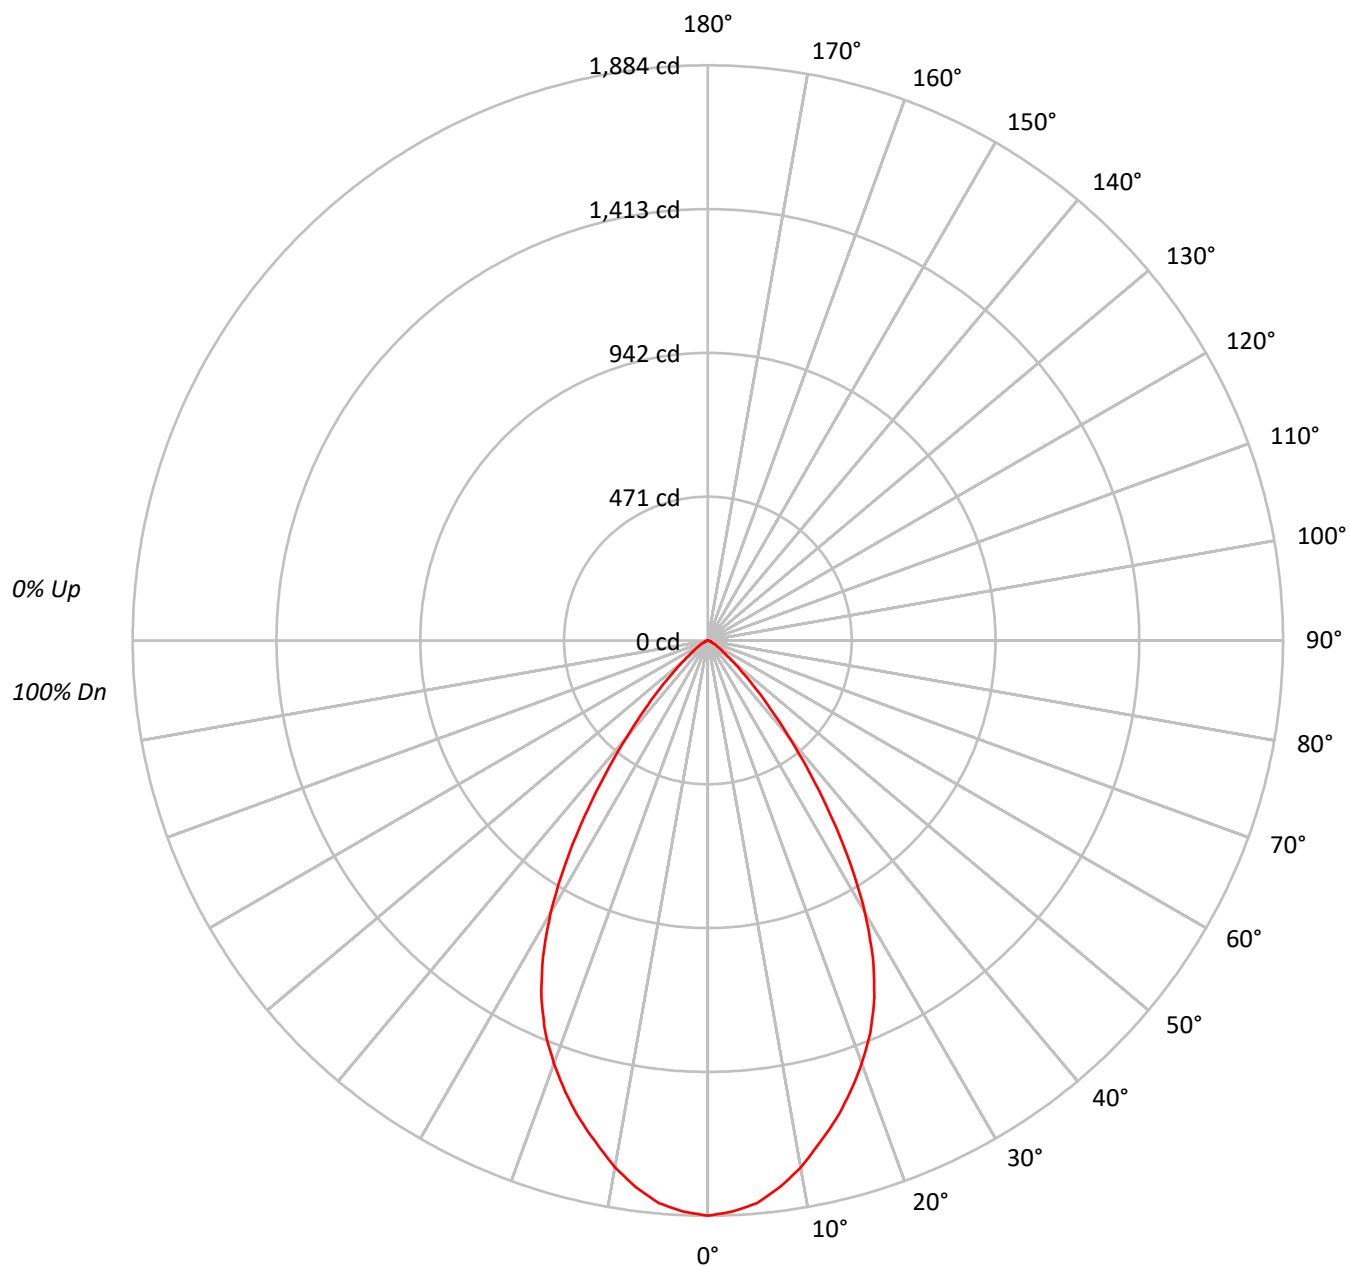



TEST NUMBER: P572901

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-27 F4X-M-X-H-BL86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	108	105		111	108	106	104		104	102	100		100	99	97		97	96	95
2	107	102	98	94		105	100	96	93		97	94	91		94	91	89		91	89	87
3	101	94	89	85		99	93	88	84		90	86	83		88	84	82		86	83	80
4	96	88	82	77		94	86	81	77		84	80	76		82	78	75		80	77	74
5	90	82	75	71		89	81	75	70		79	74	70		77	73	69		75	72	69
6	86	76	70	65		84	75	69	65		74	68	64		72	68	64		71	67	64
7	81	71	65	60		80	70	64	60		69	64	60		68	63	59		67	62	59
8	77	67	60	56		75	66	60	56		65	59	56		64	59	55		63	58	55
9	73	63	56	52		72	62	56	52		61	56	52		60	55	52		59	55	52
10	69	59	53	49		68	59	53	49		58	52	49		57	52	48		56	52	48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	231456
5°	228085
10°	218560
15°	206425
20°	192695
25°	174919
30°	146044
35°	105793
40°	66234
45°	37858
50°	19743
55°	11052
60°	7052
65°	4157
70°	3089
75°	1377
80°	2052
85°	0



TEST NUMBER: P572901

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-27 F4X-M-X-H-BL86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	173.4	9.1
10°-20°	454.8	23.9
20°-30°	584.5	30.8
30°-40°	439.7	23.1
40°-50°	176.6	9.3
50°-60°	50.2	2.6
60°-70°	15.9	0.8
70°-80°	4.5	0.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1212.6	63.8
0°-40°	1652.4	87.0
0°-60°	1879.2	98.9
0°-90°	1900.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1900.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1884	
5°	1850	173
15°	1623	455
25°	1290	584
35°	705	440
45°	218	177
55°	52	50
65°	14	16
75°	3	5
85°	0	0
90°	0	



TEST NUMBER: P572901

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-27 F4X-M-X-H-BL86

CANDELA DISTRIBUTION (FULL):

	0°
0°	1884.0
2.5°	1872.5
5°	1849.5
7.5°	1806.5
10°	1752.0
12.5°	1686.2
15°	1623.0
17.5°	1551.3
20°	1473.9
22.5°	1390.8
25°	1290.4
27.5°	1169.9
30°	1029.5
32.5°	871.7
35°	705.4
37.5°	550.5
40°	413.0
42.5°	304.0
45°	217.9
47.5°	149.2
50°	103.3
52.5°	71.7
55°	51.6
57.5°	37.3
60°	28.7
62.5°	20.1
65°	14.3
67.5°	11.5
70°	8.6
72.5°	5.7
75°	2.9
77.5°	2.9
80°	2.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)