

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P572935

Luminaire Tested: **FLD4C-30-D010 FEU4C-X-90-30 F4X-M-X-H-BL84**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P572935
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-30-D010 FEU4C-X-90-30 F4X-M-X-H-BL84
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 3000K, 90 CRI LEDS, 4LBMH TRIM
AND BOTTOM LENS, 0.125" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2042.0 lumens
Efficiency: N/A
Efficacy: 64.6 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 31.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P572935

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-30 F4X-M-X-H-BL84

Luminous Intensity Polar Plot

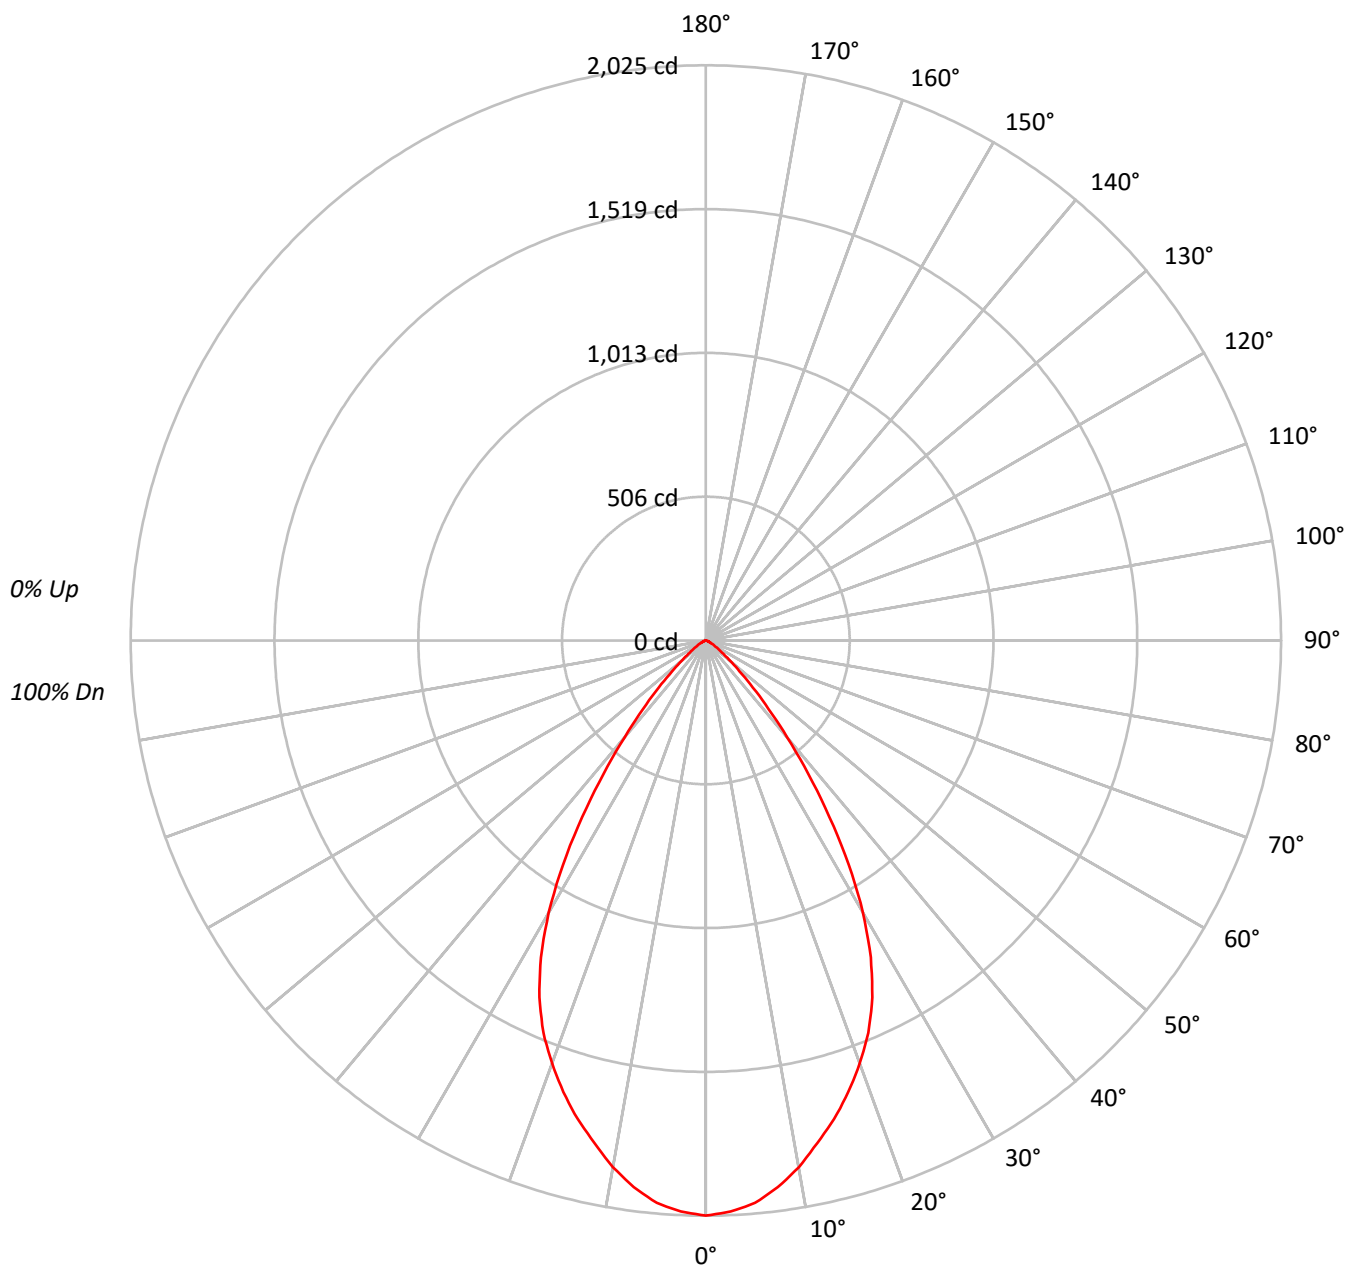



TEST NUMBER: P572935

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-30 F4X-M-X-H-BL84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	82		86
4	96	88	82	77	94	86	81	77	84	80	76		82	78	75		80
5	90	82	75	71	89	81	75	70	79	74	70		77	73	69		75
6	86	76	70	65	84	75	69	65	74	68	64		72	68	64		71
7	81	71	65	60	80	70	64	60	69	64	60		68	63	59		67
8	77	67	60	56	75	66	60	56	65	59	56		64	59	55		63
9	73	63	56	52	72	62	56	52	61	56	52		60	55	52		59
10	69	59	53	49	68	59	53	49	58	52	49		57	52	48		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	248754
5°	245141
10°	234889
15°	221853
20°	207089
25°	187986
30°	156953
35°	113712
40°	71174
45°	40690
50°	21215
55°	11887
60°	7568
65°	4477
70°	3305
75°	1471
80°	2193
85°	0



TEST NUMBER: P572935

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-30 F4X-M-X-H-BL84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	186.3	9.1
10°-20°	488.8	23.9
20°-30°	628.2	30.8
30°-40°	472.6	23.1
40°-50°	189.8	9.3
50°-60°	54.0	2.6
60°-70°	17.1	0.8
70°-80°	4.9	0.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1303.2	63.8
0°-40°	1775.9	87.0
0°-60°	2019.6	98.9
0°-90°	2042.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2042.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2025	
5°	1988	186
15°	1744	489
25°	1387	628
35°	758	473
45°	234	190
55°	56	54
65°	15	17
75°	3	5
85°	0	0
90°	0	



TEST NUMBER: P572935

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-30 F4X-M-X-H-BL84

CANDELA DISTRIBUTION (FULL):

	0°
0°	2024.8
2.5°	2012.4
5°	1987.8
7.5°	1941.5
10°	1882.9
12.5°	1812.2
15°	1744.3
17.5°	1667.3
20°	1584.0
22.5°	1494.8
25°	1386.8
27.5°	1257.4
30°	1106.4
32.5°	936.8
35°	758.2
37.5°	591.7
40°	443.8
42.5°	326.7
45°	234.2
47.5°	160.3
50°	111.0
52.5°	77.1
55°	55.5
57.5°	40.1
60°	30.8
62.5°	21.6
65°	15.4
67.5°	12.3
70°	9.2
72.5°	6.2
75°	3.1
77.5°	3.1
80°	3.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)