

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P572969

Luminaire Tested: **FLD4C-30-D010 FEU4C-X-90-30 F4X-W-X-LI-BL89BV**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P572969
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208077)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-30-D010 FEU4C-X-90-30 F4X-W-X-LI-BL89BV
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 3000K, 90 CRI LEDS, 4LBWLI TRIM
AND BOTTOM LENS, 0.125" CLEAR ACRYLIC

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2829.0 lumens
Efficiency: N/A
Efficacy: 89.5 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.18
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 31.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P572969

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-30 F4X-W-X-LI-BL89BV

Luminous Intensity Polar Plot

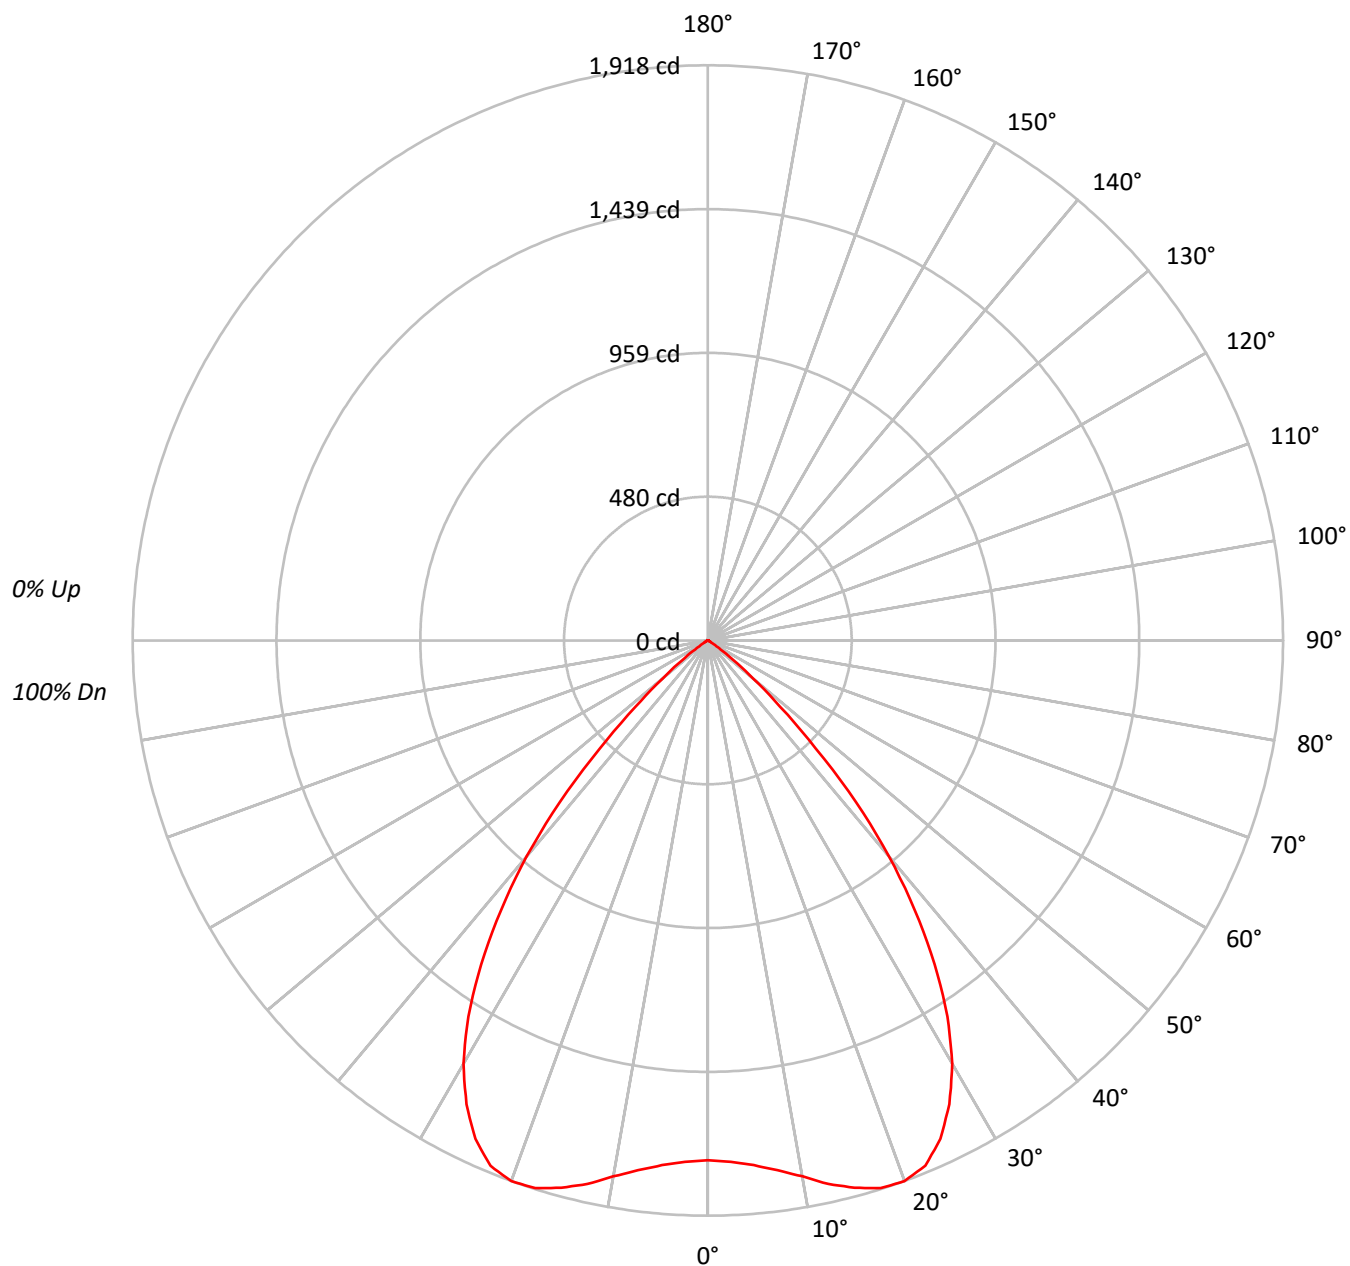



TEST NUMBER: P572969

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-30 F4X-W-X-LI-BL89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96
2	106	101	97	93	104	99	95	92	96	93	90		93	90	88		90
3	100	93	87	83	98	92	86	82	89	85	81		86	83	80		84
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78
5	88	79	72	68	87	78	72	67	76	71	67		74	70	66		73
6	83	73	66	62	82	72	66	61	71	65	61		69	64	60		68
7	78	68	61	56	77	67	61	56	66	60	56		64	59	55		63
8	74	63	56	52	72	62	56	51	61	55	51		60	55	51		59
9	69	59	52	48	68	58	52	47	57	51	47		56	51	47		55
10	66	55	48	44	65	54	48	44	53	48	44		53	47	44		52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	212942
5°	216555
10°	226344
15°	240244
20°	250768
25°	248592
30°	231188
35°	197774
40°	150687
45°	88382
50°	37767
55°	11116
60°	3194
65°	1890
70°	1149
75°	1519
80°	0
85°	0



TEST NUMBER: P572969

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-30 F4X-W-X-LI-BL89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	169.5	6.0
10°-20°	534.9	18.9
20°-30°	834.5	29.5
30°-40°	812.0	28.7
40°-50°	405.6	14.3
50°-60°	62.8	2.2
60°-70°	7.6	0.3
70°-80°	2.1	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1539.0	54.4
0°-40°	2350.9	83.1
0°-60°	2819.3	99.7
0°-90°	2829.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2829.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1733	
5°	1756	170
15°	1889	535
25°	1834	835
35°	1319	812
45°	509	406
55°	52	63
65°	6	8
75°	3	2
85°	0	0
90°	0	



TEST NUMBER: P572969

CATALOG NUMBER: FLD4C-30-D010 FEU4C-X-90-30 F4X-W-X-LI-BL89BV

CANDELA DISTRIBUTION (FULL):

	0°
0°	1733.3
2.5°	1739.8
5°	1756.0
7.5°	1782.0
10°	1814.4
12.5°	1856.4
15°	1888.9
17.5°	1914.8
20°	1918.1
22.5°	1895.4
25°	1833.9
27.5°	1743.0
30°	1629.7
32.5°	1487.2
35°	1318.7
37.5°	1133.9
40°	939.6
42.5°	732.3
45°	508.7
47.5°	327.2
50°	197.6
52.5°	106.9
55°	51.9
57.5°	22.7
60°	13.0
62.5°	9.7
65°	6.5
67.5°	6.5
70°	3.2
72.5°	3.2
75°	3.2
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)