

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573193

Luminaire Tested: **FLD4C-35-D010 FEU4C-X-90-40 F4X-M-X-LI-BL84**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573193
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205108)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-35-D010 FEU4C-X-90-40 F4X-M-X-LI-BL84
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 4000K, 90 CRI LEDS, 4LBMLI TRIM
AND BOTTOM LENS, 0.125" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3054.0 lumens
Efficiency: N/A
Efficacy: 75.6 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 40.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573193

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-40 F4X-M-X-LI-BL84

Luminous Intensity Polar Plot

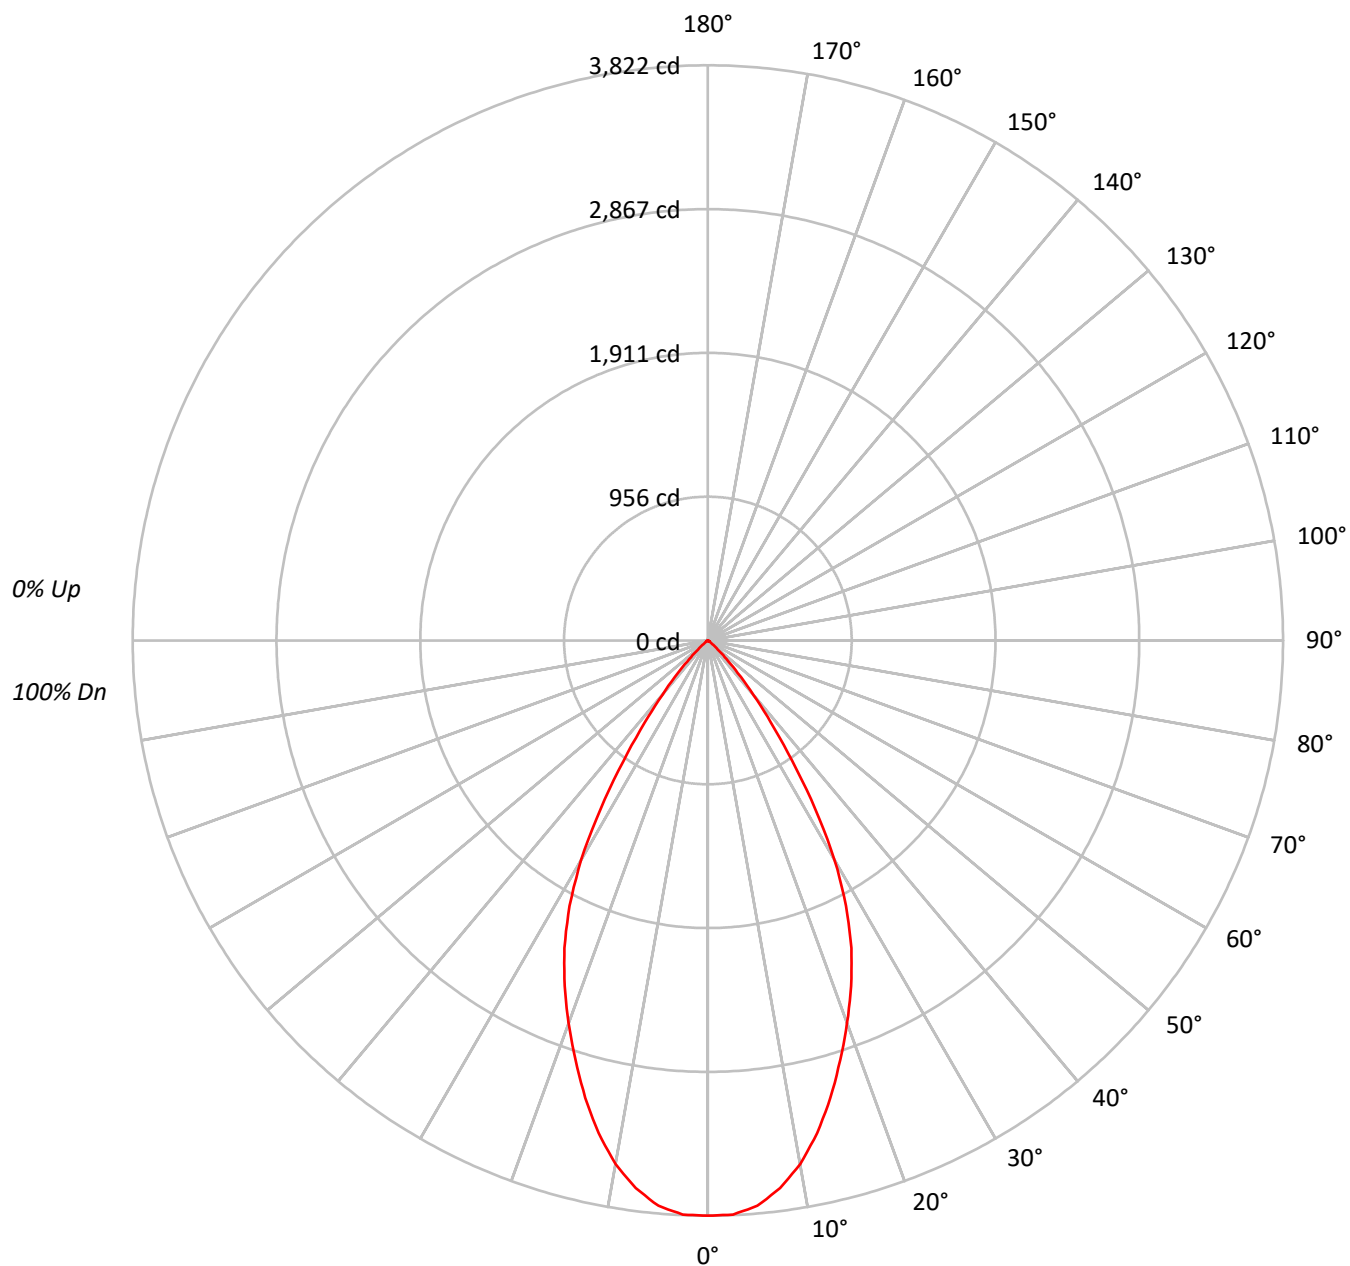



TEST NUMBER: P573193

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-40 F4X-M-X-LI-BL84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	109	106		111	109	107	105		105	103	101		101	100	98		98	97	96
2	108	103	100	96		106	102	98	95		99	96	93		96	93	91		93	91	89
3	103	97	92	88		101	95	91	87		93	89	86		90	87	85		88	85	83
4	98	91	85	81		96	89	84	81		87	83	80		85	82	79		83	80	78
5	93	85	79	75		91	84	79	75		82	78	74		81	77	73		79	76	73
6	89	80	74	70		87	79	74	70		78	73	69		76	72	69		75	71	68
7	84	75	69	65		83	75	69	65		73	68	65		72	68	64		71	67	64
8	80	71	65	61		79	70	65	61		69	64	61		68	64	60		67	63	60
9	77	67	61	57		75	67	61	57		66	61	57		65	60	57		64	60	57
10	73	64	58	54		72	63	58	54		62	57	54		62	57	54		61	57	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	469534
5°	465075
10°	440700
15°	400118
20°	353555
25°	305660
30°	238933
35°	146527
40°	75215
45°	29883
50°	9709
55°	3341
60°	2875
65°	2296
70°	1401
75°	1851
80°	0
85°	0



TEST NUMBER: P573193

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-40 F4X-M-X-LI-BL84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	352.1	11.5
10°-20°	876.6	28.7
20°-30°	1019.0	33.4
30°-40°	624.0	20.4
40°-50°	154.9	5.1
50°-60°	18.1	0.6
60°-70°	6.8	0.2
70°-80°	2.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2247.6	73.6
0°-40°	2871.6	94.0
0°-60°	3044.7	99.7
0°-90°	3054.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3054.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3822	
5°	3771	352
15°	3146	877
25°	2255	1019
35°	977	624
45°	172	155
55°	16	18
65°	8	7
75°	4	3
85°	0	0
90°	0	



TEST NUMBER: P573193

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-40 F4X-M-X-LI-BL84

CANDELA DISTRIBUTION (FULL):

	0°
0°	3821.9
2.5°	3818.0
5°	3771.2
7.5°	3669.5
10°	3532.7
12.5°	3353.0
15°	3145.9
17.5°	2923.1
20°	2704.3
22.5°	2485.4
25°	2254.9
27.5°	1989.1
30°	1684.3
32.5°	1328.7
35°	977.0
37.5°	687.8
40°	469.0
42.5°	293.0
45°	172.0
47.5°	97.7
50°	50.8
52.5°	23.5
55°	15.6
57.5°	11.7
60°	11.7
62.5°	7.9
65°	7.9
67.5°	3.9
70°	3.9
72.5°	3.9
75°	3.9
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)