

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573197

Luminaire Tested: **FLD4C-35-D010 FEU4C-X-90-40 F4X-M-X-LI-BL89BV**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573197
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205108)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-35-D010 FEU4C-X-90-40 F4X-M-X-LI-BL89BV
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 4000K, 90 CRI LEDS, 4LBMLI TRIM
AND BOTTOM LENS, 0.125" CLEAR ACRYLIC

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3213.0 lumens
Efficiency: N/A
Efficacy: 79.5 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 40.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573197

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-40 F4X-M-X-LI-BL89BV

Luminous Intensity Polar Plot

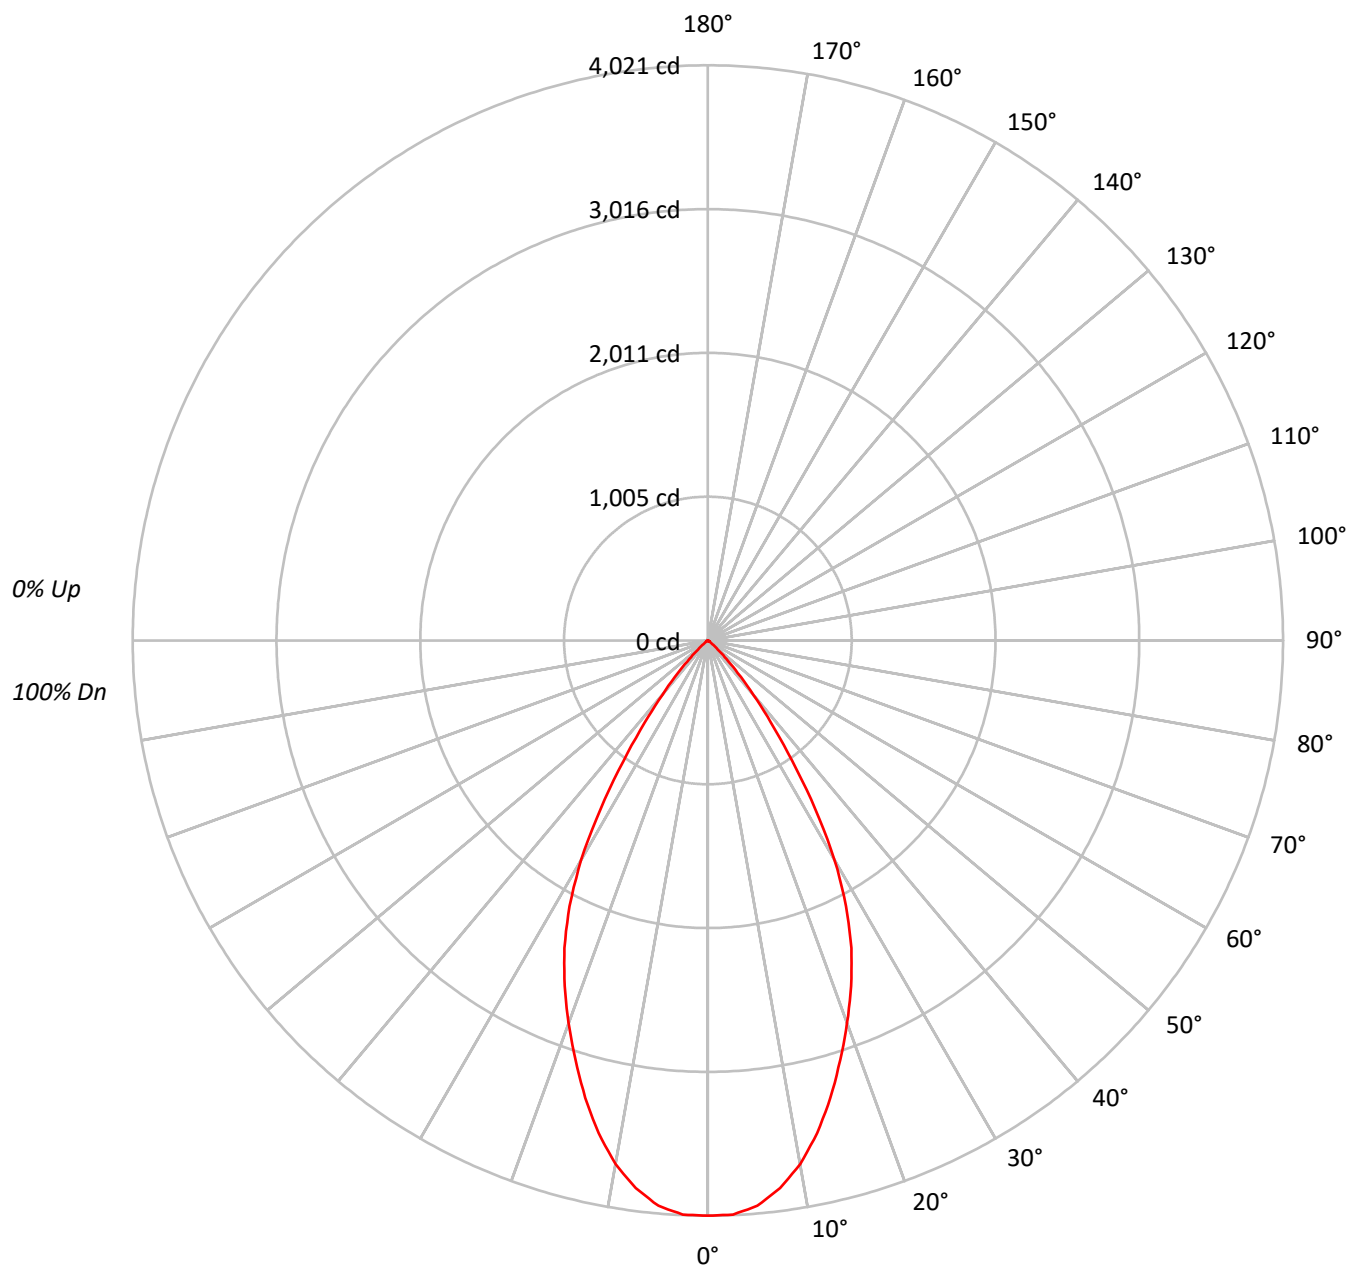



TEST NUMBER: P573197

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-40 F4X-M-X-LI-BL89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	109	106		111	109	107	105		105	103	101		101	100	98		98	97	96
2	108	103	100	96		106	102	98	95		99	96	93		96	93	91		93	91	89
3	103	97	92	88		101	95	91	87		93	89	86		90	87	85		88	85	83
4	98	91	85	81		96	89	84	81		87	83	80		85	82	79		83	80	78
5	93	85	79	75		91	84	79	75		82	78	74		81	77	73		79	76	73
6	89	80	74	70		87	79	74	70		78	73	69		76	72	69		75	71	68
7	84	75	69	65		83	75	69	65		73	68	65		72	68	64		71	67	64
8	80	71	65	61		79	70	65	61		69	64	61		68	64	60		67	63	60
9	77	67	61	57		75	67	61	57		66	61	57		65	60	57		64	60	57
10	73	64	58	54		72	63	58	54		62	57	54		62	57	54		61	57	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	493982
5°	489283
10°	463641
15°	420939
20°	371963
25°	321574
30°	251374
35°	154161
40°	79128
45°	31430
50°	10206
55°	3513
60°	3022
65°	2413
70°	1473
75°	1946
80°	0
85°	0



TEST NUMBER: P573197

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-40 F4X-M-X-LI-BL89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	370.4	11.5
10°-20°	922.2	28.7
20°-30°	1072.0	33.4
30°-40°	656.5	20.4
40°-50°	163.0	5.1
50°-60°	19.0	0.6
60°-70°	7.1	0.2
70°-80°	2.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2364.6	73.6
0°-40°	3021.1	94.0
0°-60°	3203.2	99.7
0°-90°	3213.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3213.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4021	
5°	3968	370
15°	3310	922
25°	2372	1072
35°	1028	656
45°	181	163
55°	16	19
65°	8	7
75°	4	3
85°	0	0
90°	0	



TEST NUMBER: P573197

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-40 F4X-M-X-LI-BL89BV

CANDELA DISTRIBUTION (FULL):

	0°
0°	4020.9
2.5°	4016.8
5°	3967.5
7.5°	3860.6
10°	3716.6
12.5°	3527.5
15°	3309.6
17.5°	3075.3
20°	2845.1
22.5°	2614.8
25°	2372.3
27.5°	2092.7
30°	1772.0
32.5°	1397.9
35°	1027.9
37.5°	723.6
40°	493.4
42.5°	308.3
45°	180.9
47.5°	102.8
50°	53.4
52.5°	24.7
55°	16.4
57.5°	12.3
60°	12.3
62.5°	8.3
65°	8.3
67.5°	4.1
70°	4.1
72.5°	4.1
75°	4.1
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)