

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573232

Luminaire Tested: **FLD4C-35-D010 FEU4C-X-90-50 F4X-M-X-LI-BL89AM**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573232
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205108)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-35-D010 FEU4C-X-90-50 F4X-M-X-LI-BL89AM
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 5000K, 90 CRI LEDS, 4LBMLI TRIM
AND BOTTOM LENS, 0.125" OPAL POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1352.0 lumens
Efficiency: N/A
Efficacy: 33.5 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 40.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573232

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-50 F4X-M-X-LI-BL89AM

Luminous Intensity Polar Plot

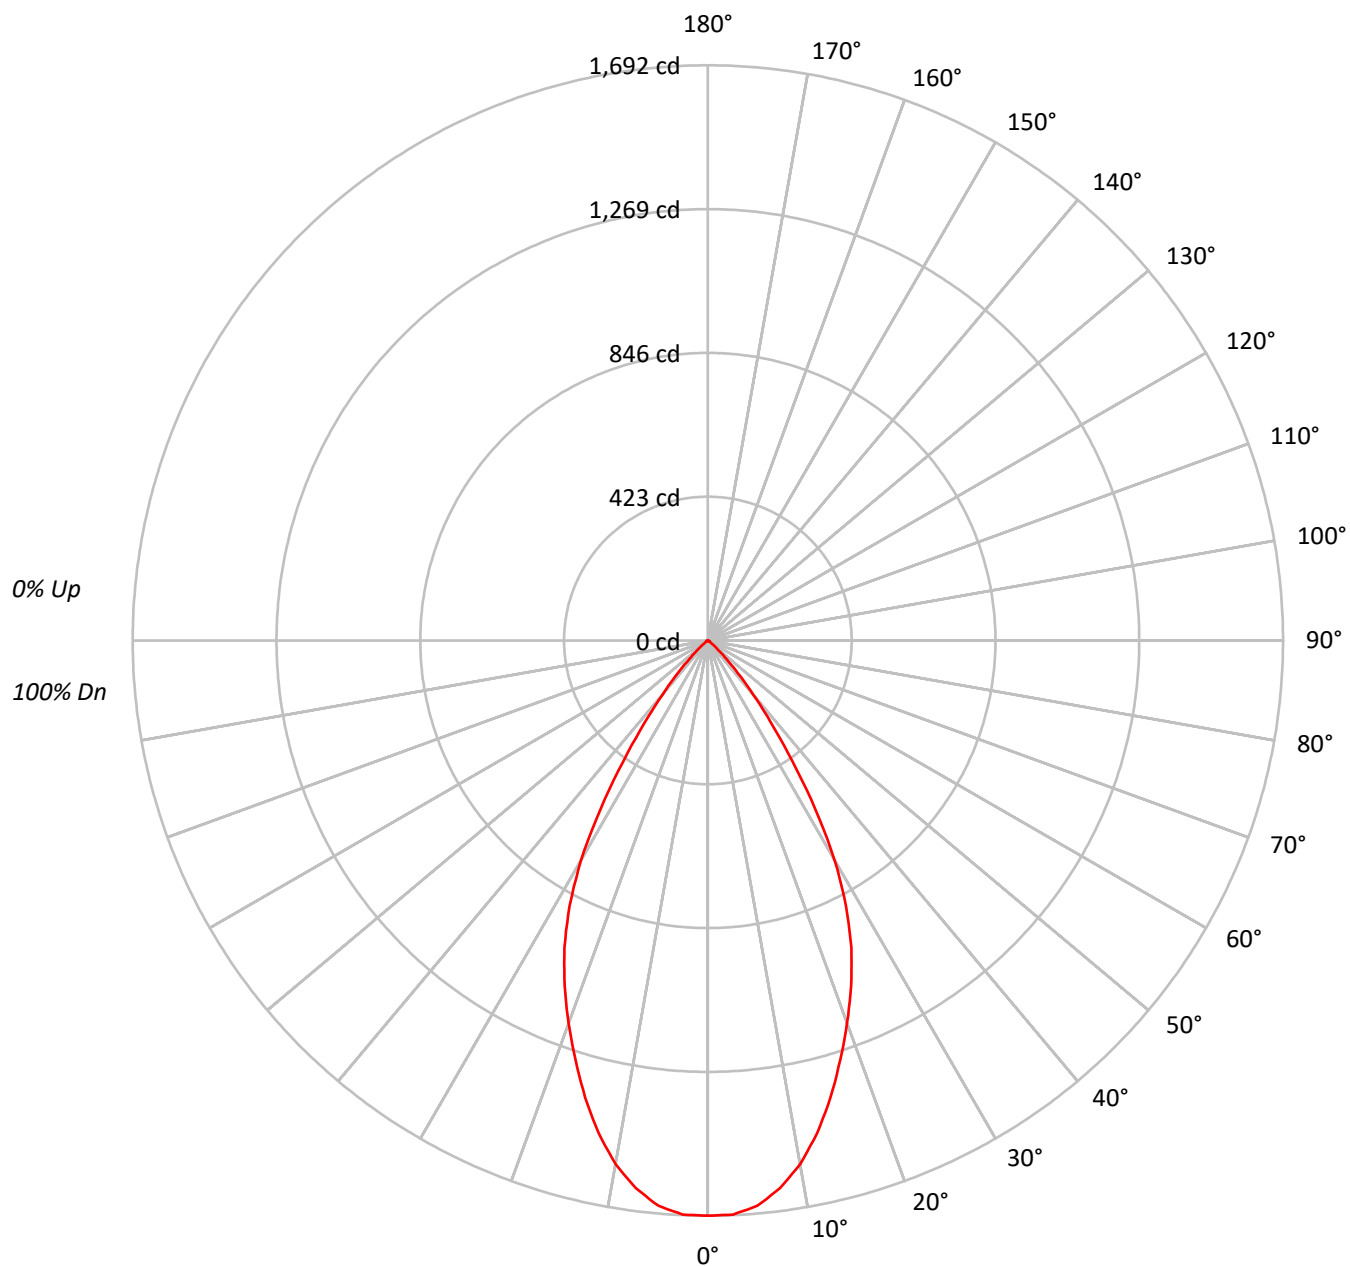

TEST NUMBER: P573232

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-50 F4X-M-X-LI-BL89AM

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20							
RC	80				70				50				30				10				0			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																								
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94						
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88						
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82						
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76						
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71						
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67						
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63						
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59						
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55						
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52						

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	207868
5°	205887
10°	195094
15°	177134
20°	156519
25°	135310
30°	105770
35°	64865
40°	33294
45°	13222
50°	4300
55°	1478
60°	1278
65°	1017
70°	611
75°	807
80°	0
85°	0



TEST NUMBER: P573232

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-50 F4X-M-X-LI-BL89AM

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	155.9	11.5
10°-20°	388.1	28.7
20°-30°	451.1	33.4
30°-40°	276.2	20.4
40°-50°	68.6	5.1
50°-60°	8.0	0.6
60°-70°	3.0	0.2
70°-80°	1.1	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	995.0	73.6
0°-40°	1271.3	94.0
0°-60°	1347.9	99.7
0°-90°	1352.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1352.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1692	
5°	1670	156
15°	1393	388
25°	998	451
35°	432	276
45°	76	69
55°	7	8
65°	4	3
75°	2	1
85°	0	0
90°	0	



TEST NUMBER: P573232

CATALOG NUMBER: FLD4C-35-D010 FEU4C-X-90-50 F4X-M-X-LI-BL89AM

CANDELA DISTRIBUTION (FULL):

	0°
0°	1692.0
2.5°	1690.2
5°	1669.5
7.5°	1624.5
10°	1563.9
12.5°	1484.4
15°	1392.7
17.5°	1294.1
20°	1197.2
22.5°	1100.3
25°	998.2
27.5°	880.6
30°	745.6
32.5°	588.2
35°	432.5
37.5°	304.5
40°	207.6
42.5°	129.7
45°	76.1
47.5°	43.3
50°	22.5
52.5°	10.4
55°	6.9
57.5°	5.2
60°	5.2
62.5°	3.5
65°	3.5
67.5°	1.7
70°	1.7
72.5°	1.7
75°	1.7
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)