

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573323

Luminaire Tested: **FLD4C-40-D010 FEU4C-X-90-30 F4X-W-X-H-BL89BV**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573323
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-40-D010 FEU4C-X-90-30 F4X-W-X-H-BL89BV
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 3000K, 90 CRI LEDS, 4LBWH TRIM
AND BOTTOM LENS, 0.125" CLEAR ACRYLIC

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3272.0 lumens
Efficiency: N/A
Efficacy: 69.6 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573323

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-30 F4X-W-X-H-BL89BV

Luminous Intensity Polar Plot

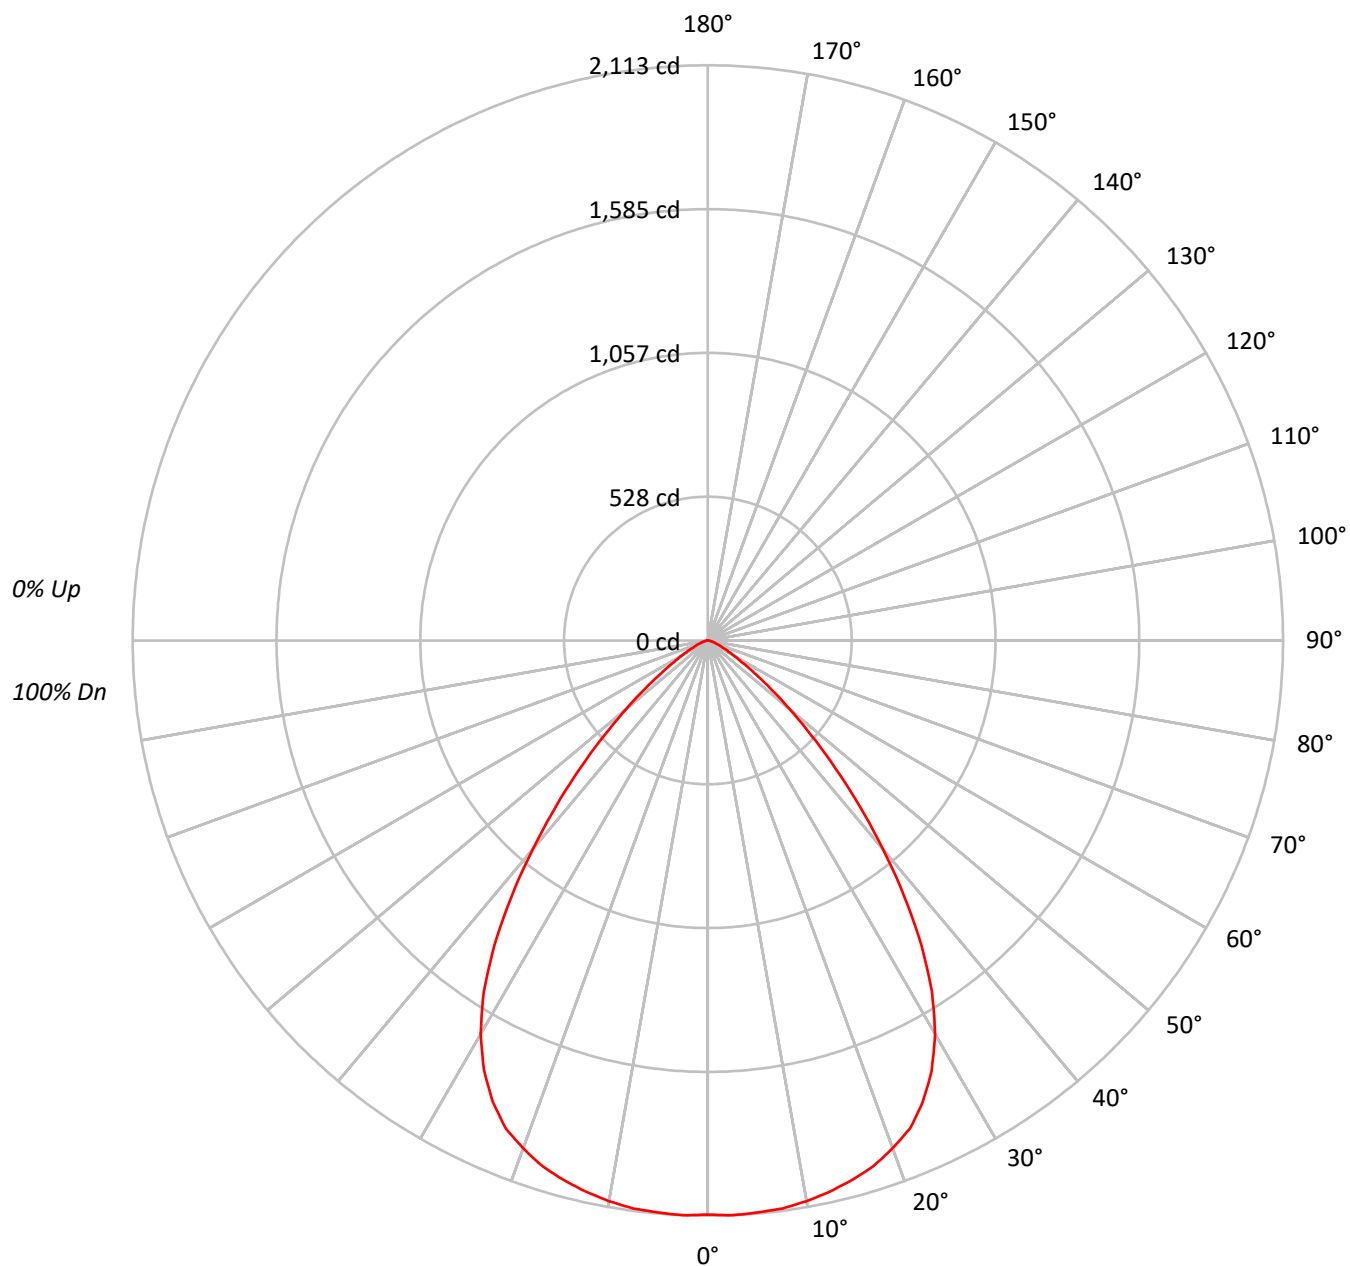



TEST NUMBER: P573323

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-30 F4X-W-X-H-BL89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	112	109	106	104		110	107	104	102		103	101	99		99	97	96		96	94	93
2	105	100	95	91		103	98	93	90		95	91	88		91	88	86		89	86	84
3	99	91	85	80		97	90	84	80		87	82	78		84	80	77		82	79	76
4	92	83	77	72		90	82	76	71		80	75	70		78	73	70		76	72	69
5	87	77	70	65		85	76	69	64		74	68	64		72	67	63		70	66	62
6	81	71	64	58		80	70	63	58		68	62	58		67	61	57		65	61	57
7	76	65	58	53		75	65	58	53		63	57	53		62	56	52		61	56	52
8	72	60	53	49		70	60	53	49		59	53	48		58	52	48		57	52	48
9	68	56	49	45		66	56	49	45		55	49	44		54	48	44		53	48	44
10	64	52	46	41		63	52	46	41		51	45	41		50	45	41		49	44	41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	259098
5°	260088
10°	260874
15°	260887
20°	259463
25°	253377
30°	236819
35°	205078
40°	160197
45°	114947
50°	74673
55°	44701
60°	26168
65°	16802
70°	11171
75°	8449
80°	6297
85°	0



TEST NUMBER: P573323

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-30 F4X-W-X-H-BL89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	200.8	6.1
10°-20°	578.7	17.7
20°-30°	854.0	26.1
30°-40°	842.7	25.8
40°-50°	515.7	15.8
50°-60°	197.7	6.0
60°-70°	61.8	1.9
70°-80°	18.1	0.6
80°-90°	2.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1633.5	49.9
0°-40°	2476.2	75.7
0°-60°	3189.7	97.5
0°-90°	3272.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3272.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2109	
5°	2109	201
15°	2051	579
25°	1869	854
35°	1367	843
45°	662	516
55°	209	198
65°	58	62
75°	18	18
85°	0	2
90°	0	



TEST NUMBER: P573323

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-30 F4X-W-X-H-BL89BV

CANDELA DISTRIBUTION (FULL):

	0°
0°	2109.0
2.5°	2113.4
5°	2109.0
7.5°	2104.6
10°	2091.2
12.5°	2073.4
15°	2051.2
17.5°	2024.6
20°	1984.6
22.5°	1940.3
25°	1869.2
27.5°	1780.3
30°	1669.4
32.5°	1531.9
35°	1367.4
37.5°	1185.4
40°	998.9
42.5°	825.8
45°	661.6
47.5°	514.9
50°	390.7
52.5°	288.7
55°	208.7
57.5°	146.5
60°	106.5
62.5°	80.0
65°	57.8
67.5°	44.4
70°	31.1
72.5°	22.2
75°	17.8
77.5°	8.9
80°	8.9
82.5°	4.4
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)