

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573355

Luminaire Tested: **FLD4C-40-D010 FEU4C-X-90-35 F4X-W-X-H-BL84**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573355
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-40-D010 FEU4C-X-90-35 F4X-W-X-H-BL84
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 3500K, 90 CRI LEDS, 4LBWH TRIM
AND BOTTOM LENS, 0.125" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3153.0 lumens
Efficiency: N/A
Efficacy: 67.1 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573355

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-35 F4X-W-X-H-BL84

Luminous Intensity Polar Plot

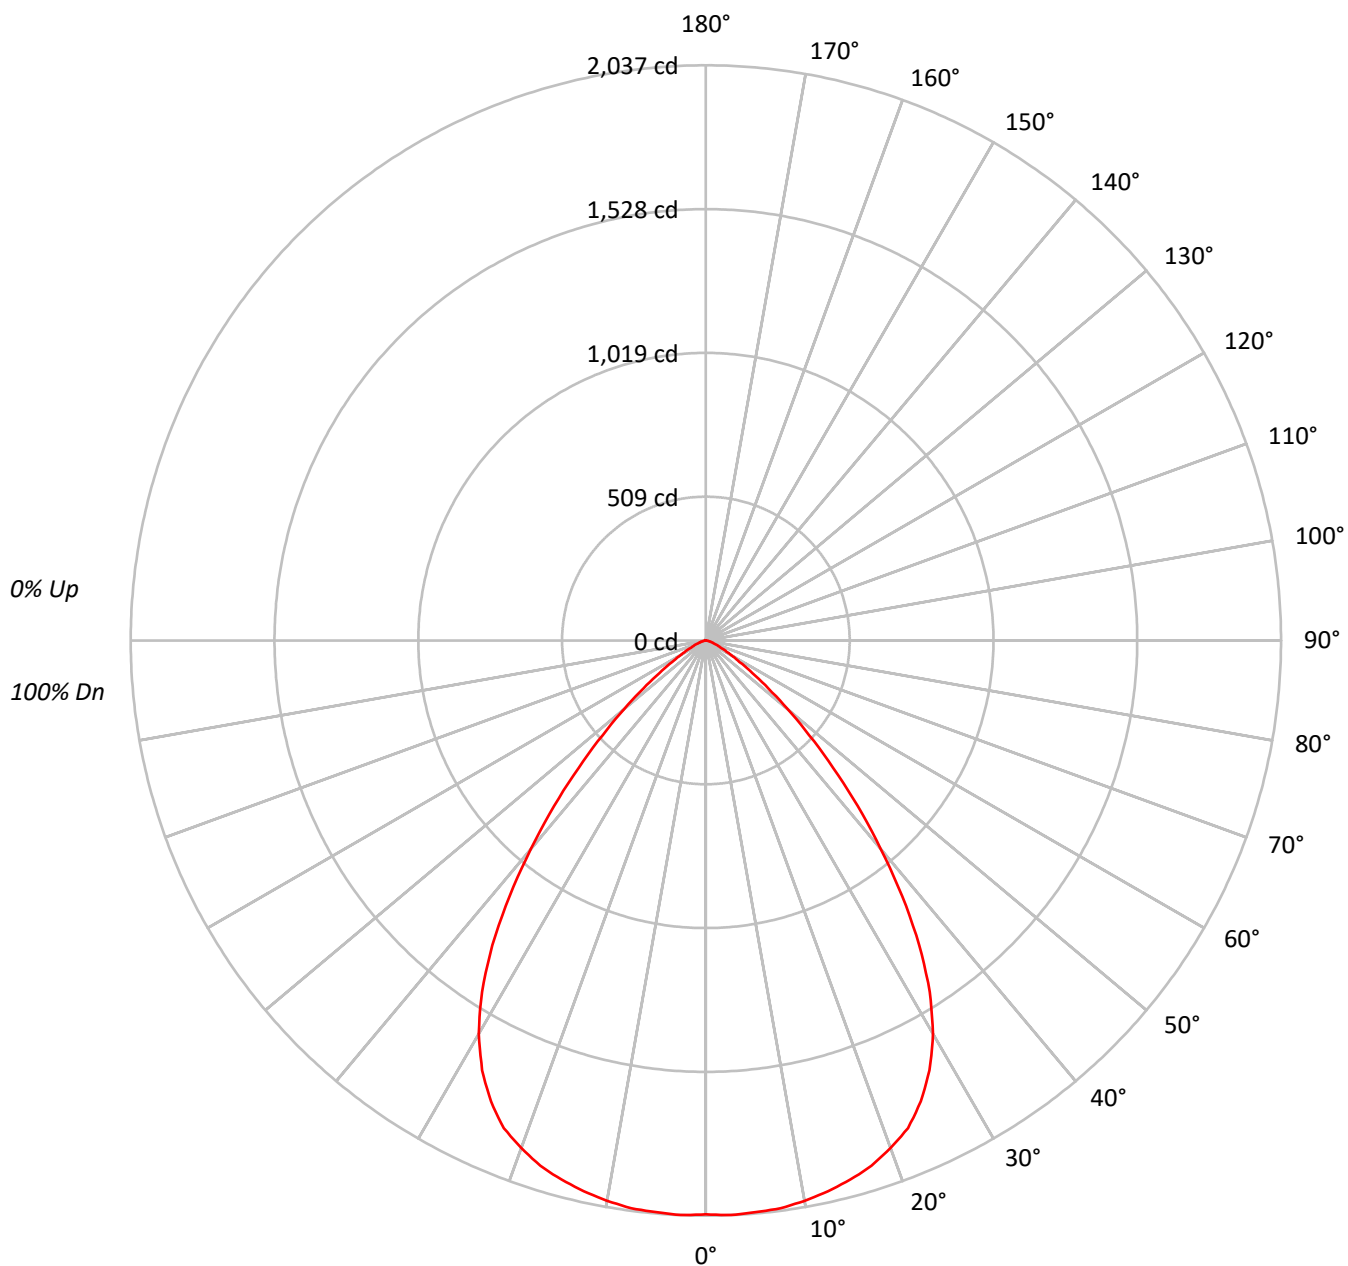



TEST NUMBER: P573355

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-35 F4X-W-X-H-BL84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	112	109	106	104		110	107	104	102		103	101	99		99	97	96		96	94	93
2	105	100	95	91		103	98	93	90		95	91	88		91	88	86		89	86	84
3	99	91	85	80		97	90	84	80		87	82	78		84	80	77		82	79	76
4	92	83	77	72		90	82	76	71		80	75	70		78	73	70		76	72	69
5	87	77	70	65		85	76	69	64		74	68	64		72	67	63		70	66	62
6	81	71	64	58		80	70	63	58		68	62	58		67	61	57		65	61	57
7	76	65	58	53		75	65	58	53		63	57	53		62	56	52		61	56	52
8	72	60	53	49		70	60	53	49		59	53	48		58	52	48		57	52	48
9	68	56	49	45		66	56	49	45		55	49	44		54	48	44		53	48	44
10	64	52	46	41		63	52	46	41		51	45	41		50	45	41		49	44	41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	249675
5°	250629
10°	251394
15°	251398
20°	250023
25°	244160
30°	228209
35°	197624
40°	154376
45°	110760
50°	71959
55°	43073
60°	25210
65°	16192
70°	10776
75°	8117
80°	6084
85°	0



TEST NUMBER: P573355

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-35 F4X-W-X-H-BL84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	193.5	6.1
10°-20°	557.7	17.7
20°-30°	822.9	26.1
30°-40°	812.1	25.8
40°-50°	497.0	15.8
50°-60°	190.5	6.0
60°-70°	59.6	1.9
70°-80°	17.5	0.6
80°-90°	2.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1574.1	49.9
0°-40°	2386.2	75.7
0°-60°	3073.6	97.5
0°-90°	3153.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3153.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2032	
5°	2032	194
15°	1977	558
25°	1801	823
35°	1318	812
45°	638	497
55°	201	191
65°	56	60
75°	17	17
85°	0	2
90°	0	



TEST NUMBER: P573355

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-35 F4X-W-X-H-BL84

CANDELA DISTRIBUTION (FULL):

	0°
0°	2032.3
2.5°	2036.6
5°	2032.3
7.5°	2028.0
10°	2015.2
12.5°	1998.0
15°	1976.6
17.5°	1950.9
20°	1912.4
22.5°	1869.8
25°	1801.2
27.5°	1715.6
30°	1608.7
32.5°	1476.1
35°	1317.7
37.5°	1142.3
40°	962.6
42.5°	795.8
45°	637.5
47.5°	496.2
50°	376.5
52.5°	278.2
55°	201.1
57.5°	141.1
60°	102.6
62.5°	77.1
65°	55.7
67.5°	42.8
70°	30.0
72.5°	21.4
75°	17.1
77.5°	8.6
80°	8.6
82.5°	4.3
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)