

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573424

Luminaire Tested: **FLD4C-40-D010 FEU4C-X-90-50 F4X-N-X-LI-BL89AM**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573424
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-40-D010 FEU4C-X-90-50 F4X-N-X-LI-BL89AM
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 5000K, 90 CRI LEDS, 4LBNLI TRIM
AND BOTTOM LENS, 0.125" OPAL POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1232.0 lumens
Efficiency: N/A
Efficacy: 26.2 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573424

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-50 F4X-N-X-LI-BL89AM

Luminous Intensity Polar Plot

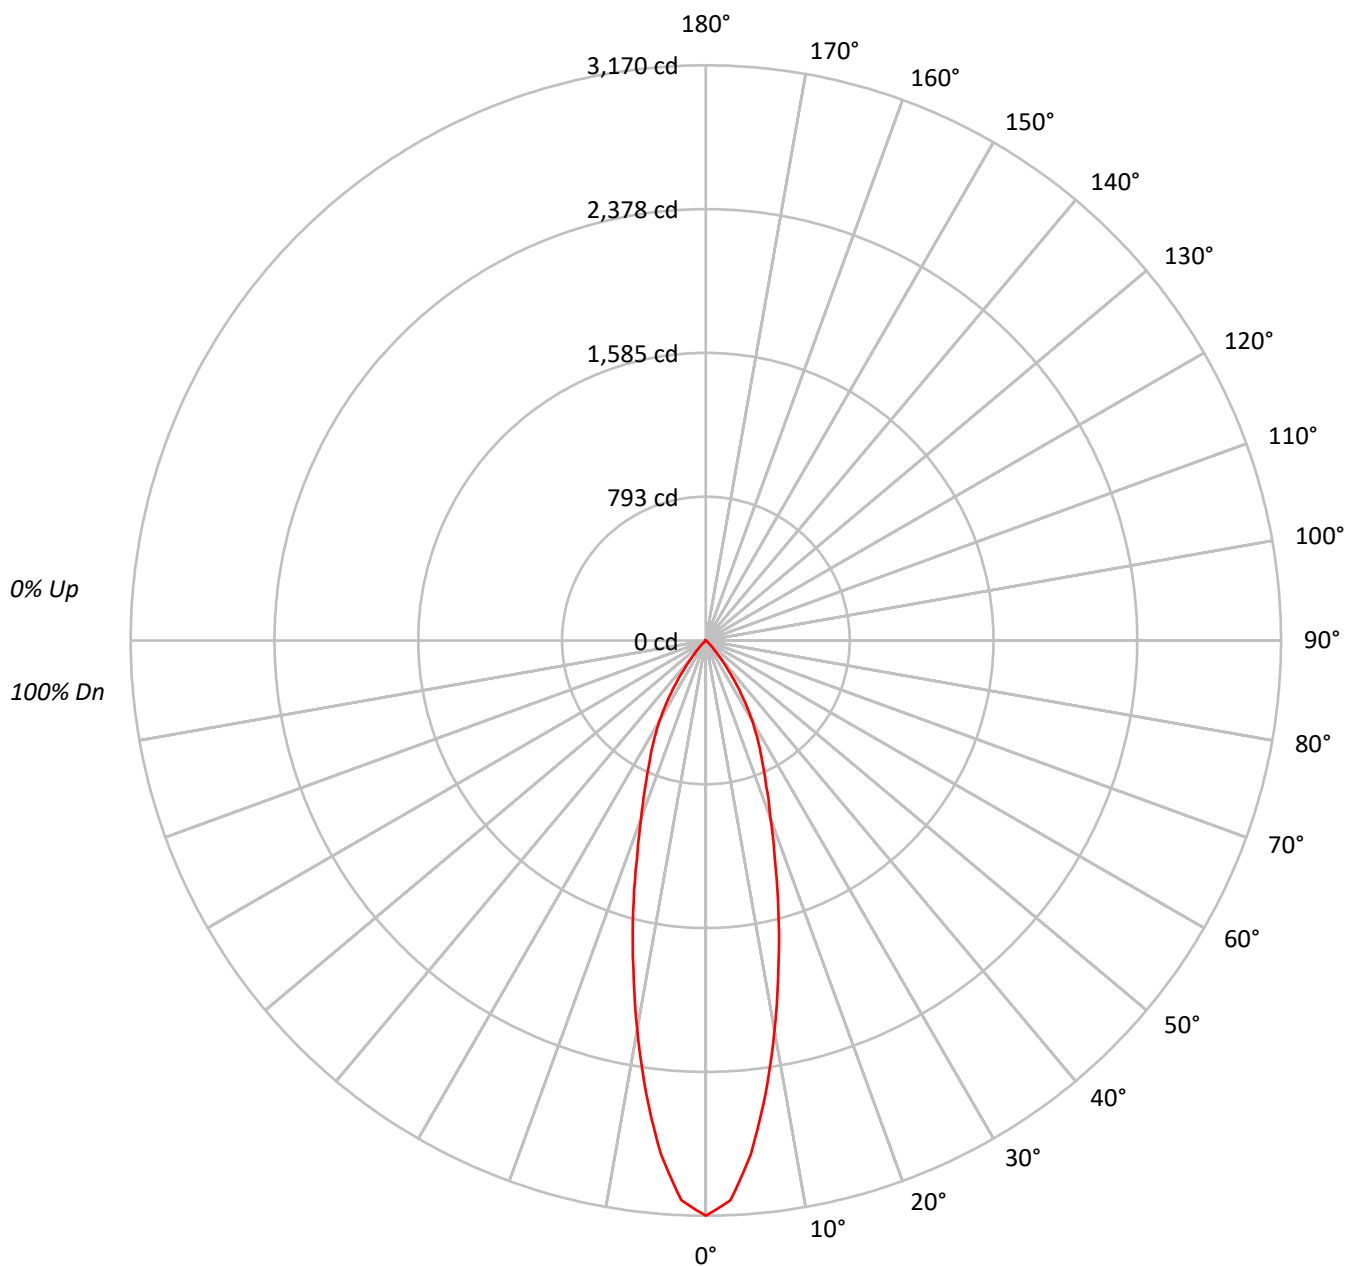



TEST NUMBER: P573424

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-50 F4X-N-X-LI-BL89AM

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20							
RC	80				70				50				30				10				0			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																								
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95						
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90						
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85						
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81						
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77						
6	92	85	80	76	91	84	79	76	83	78	75	81	78	75	80	77	74	73						
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	69						
8	85	77	72	68	84	77	72	68	76	71	68	75	71	68	74	70	67	66						
9	82	74	69	65	81	73	68	65	72	68	65	72	68	65	71	67	64	63						
10	79	71	66	62	78	70	65	62	69	65	62	69	65	62	68	64	62	61						

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	389507
5°	350508
10°	271728
15°	196670
20°	136177
25°	99280
30°	72135
35°	42683
40°	17946
45°	5594
50°	726
55°	407
60°	467
65°	552
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P573424

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-50 F4X-N-X-LI-BL89AM

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	249.9	20.3
10°-20°	427.7	34.7
20°-30°	340.0	27.6
30°-40°	180.0	14.6
40°-50°	31.0	2.5
50°-60°	2.3	0.2
60°-70°	1.2	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1017.5	82.6
0°-40°	1197.5	97.2
0°-60°	1230.8	99.9
0°-90°	1232.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1232.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3170	
5°	2842	250
15°	1546	428
25°	732	340
35°	285	180
45°	32	31
55°	2	2
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P573424

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-50 F4X-N-X-LI-BL89AM

CANDELA DISTRIBUTION (FULL):

	0°
0°	3170.5
2.5°	3088.8
5°	2842.2
7.5°	2519.7
10°	2178.2
12.5°	1848.0
15°	1546.3
17.5°	1265.5
20°	1041.6
22.5°	870.9
25°	732.4
27.5°	620.4
30°	508.5
32.5°	394.7
35°	284.6
37.5°	187.9
40°	111.9
42.5°	64.5
45°	32.2
47.5°	11.4
50°	3.8
52.5°	3.8
55°	1.9
57.5°	1.9
60°	1.9
62.5°	1.9
65°	1.9
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)