

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573430

Luminaire Tested: **FLD4C-40-D010 FEU4C-X-90-50 F4X-W-X-H-BL89AM**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573430
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-40-D010 FEU4C-X-90-50 F4X-W-X-H-BL89AM
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 5000K, 90 CRI LEDS, 4LBWH TRIM
AND BOTTOM LENS, 0.125" OPAL POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1398.0 lumens
Efficiency: N/A
Efficacy: 29.7 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573430

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-50 F4X-W-X-H-BL89AM

Luminous Intensity Polar Plot

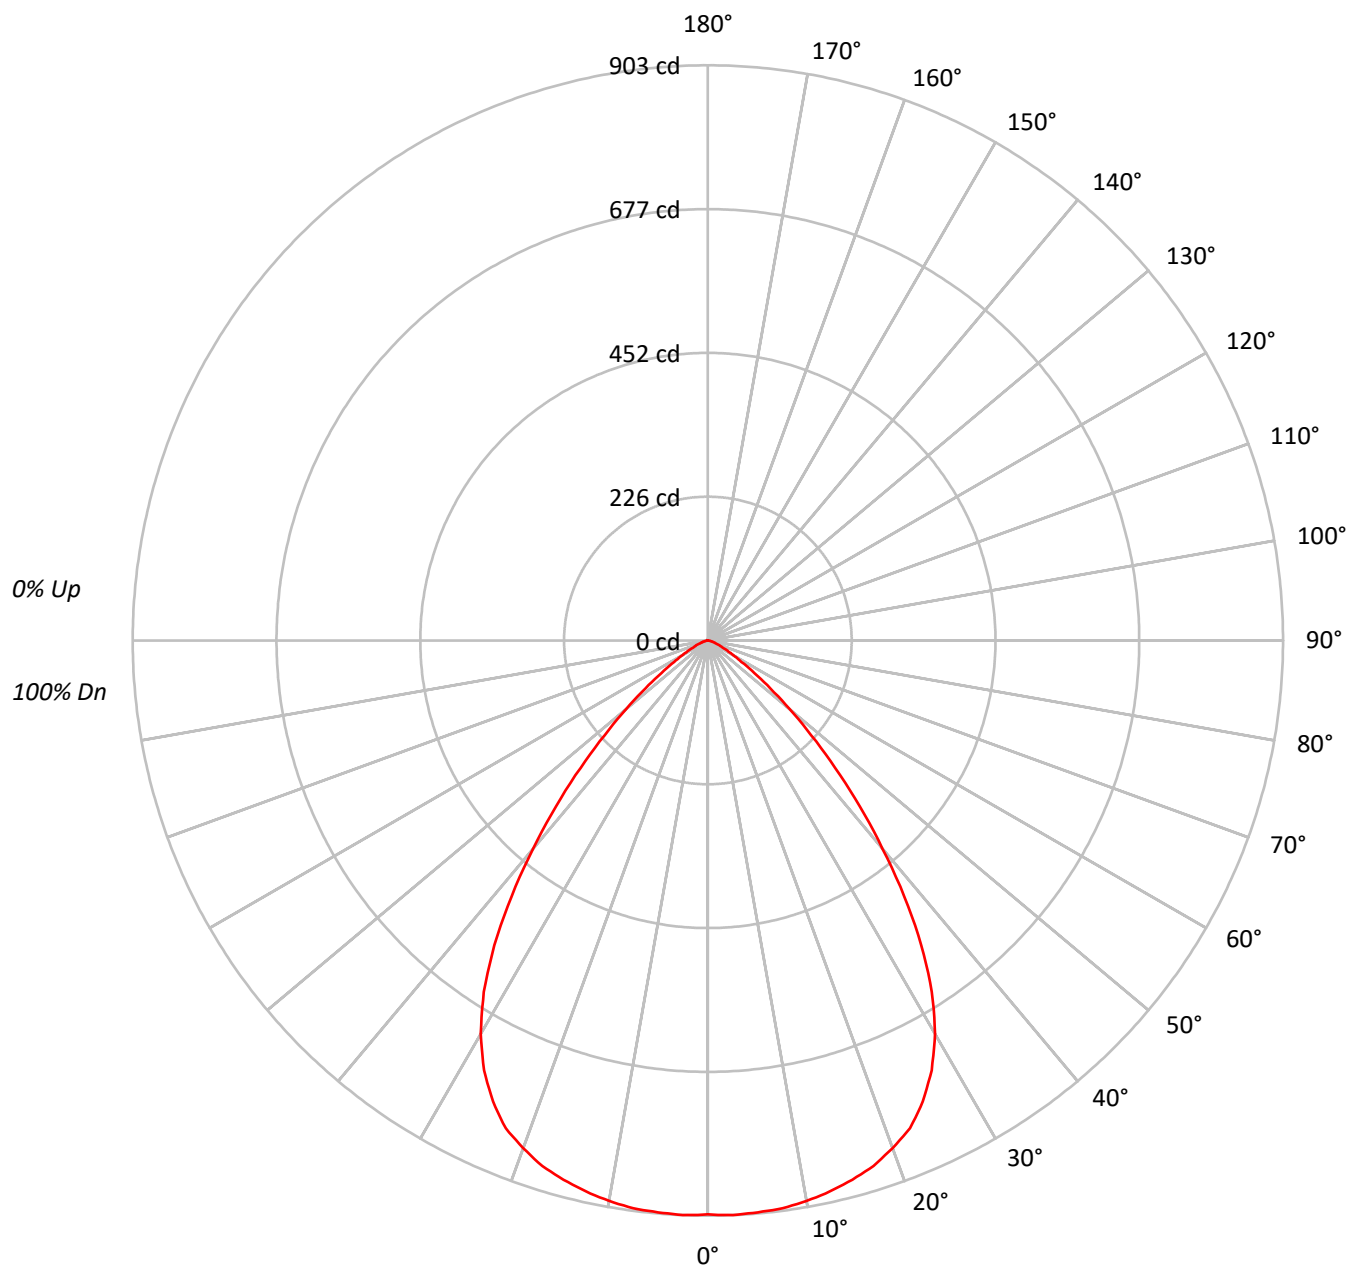



TEST NUMBER: P573430

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-50 F4X-W-X-H-BL89AM

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	112	109	106	104		110	107	104	102		103	101	99		99	97	96		96	94	93
2	105	100	95	91		103	98	93	90		95	91	88		91	88	86		89	86	84
3	99	91	85	80		97	90	84	80		87	82	78		84	80	77		82	79	76
4	92	83	77	72		90	82	76	71		80	75	70		78	73	70		76	72	69
5	87	77	70	65		85	76	69	64		74	68	64		72	67	63		70	66	62
6	81	71	64	58		80	70	63	58		68	62	58		67	61	57		65	61	57
7	76	65	58	53		75	65	58	53		63	57	53		62	56	52		61	56	52
8	72	60	53	49		70	60	53	49		59	53	48		58	52	48		57	52	48
9	68	56	49	45		66	56	49	45		55	49	44		54	48	44		53	48	44
10	64	52	46	41		63	52	46	41		51	45	41		50	45	41		49	44	41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	110703
5°	111126
10°	111463
15°	111467
20°	110853
25°	108253
30°	101188
35°	87616
40°	68448
45°	49117
50°	31899
55°	19106
60°	11180
65°	7180
70°	4777
75°	3607
80°	2688
85°	0



TEST NUMBER: P573430

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-50 F4X-W-X-H-BL89AM

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	85.8	6.1
10°-20°	247.3	17.7
20°-30°	364.9	26.1
30°-40°	360.1	25.8
40°-50°	220.3	15.8
50°-60°	84.5	6.0
60°-70°	26.4	1.9
70°-80°	7.7	0.6
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	697.9	49.9
0°-40°	1058.0	75.7
0°-60°	1362.8	97.5
0°-90°	1398.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1398.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	901	
5°	901	86
15°	876	247
25°	799	365
35°	584	360
45°	283	220
55°	89	84
65°	25	26
75°	8	8
85°	0	1
90°	0	



TEST NUMBER: P573430

CATALOG NUMBER: FLD4C-40-D010 FEU4C-X-90-50 F4X-W-X-H-BL89AM

CANDELA DISTRIBUTION (FULL):

	0°
0°	901.1
2.5°	903.0
5°	901.1
7.5°	899.2
10°	893.5
12.5°	885.9
15°	876.4
17.5°	865.0
20°	847.9
22.5°	829.0
25°	798.6
27.5°	760.7
30°	713.3
32.5°	654.5
35°	584.2
37.5°	506.5
40°	426.8
42.5°	352.8
45°	282.7
47.5°	220.0
50°	166.9
52.5°	123.3
55°	89.2
57.5°	62.6
60°	45.5
62.5°	34.2
65°	24.7
67.5°	19.0
70°	13.3
72.5°	9.5
75°	7.6
77.5°	3.8
80°	3.8
82.5°	1.9
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)