

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573471

Luminaire Tested: **FLD4C-45-D010 FEU4C-X-90-27 F4X-W-X-LI-BL86**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573471
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208077)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-45-D010 FEU4C-X-90-27 F4X-W-X-LI-BL86
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 4LBWLI TRIM
AND BOTTOM LENS, 0.250" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3966.0 lumens
Efficiency: N/A
Efficacy: 80.0 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.18
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 49.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573471

CATALOG NUMBER: FLD4C-45-D010 FEU4C-X-90-27 F4X-W-X-LI-BL86

Luminous Intensity Polar Plot

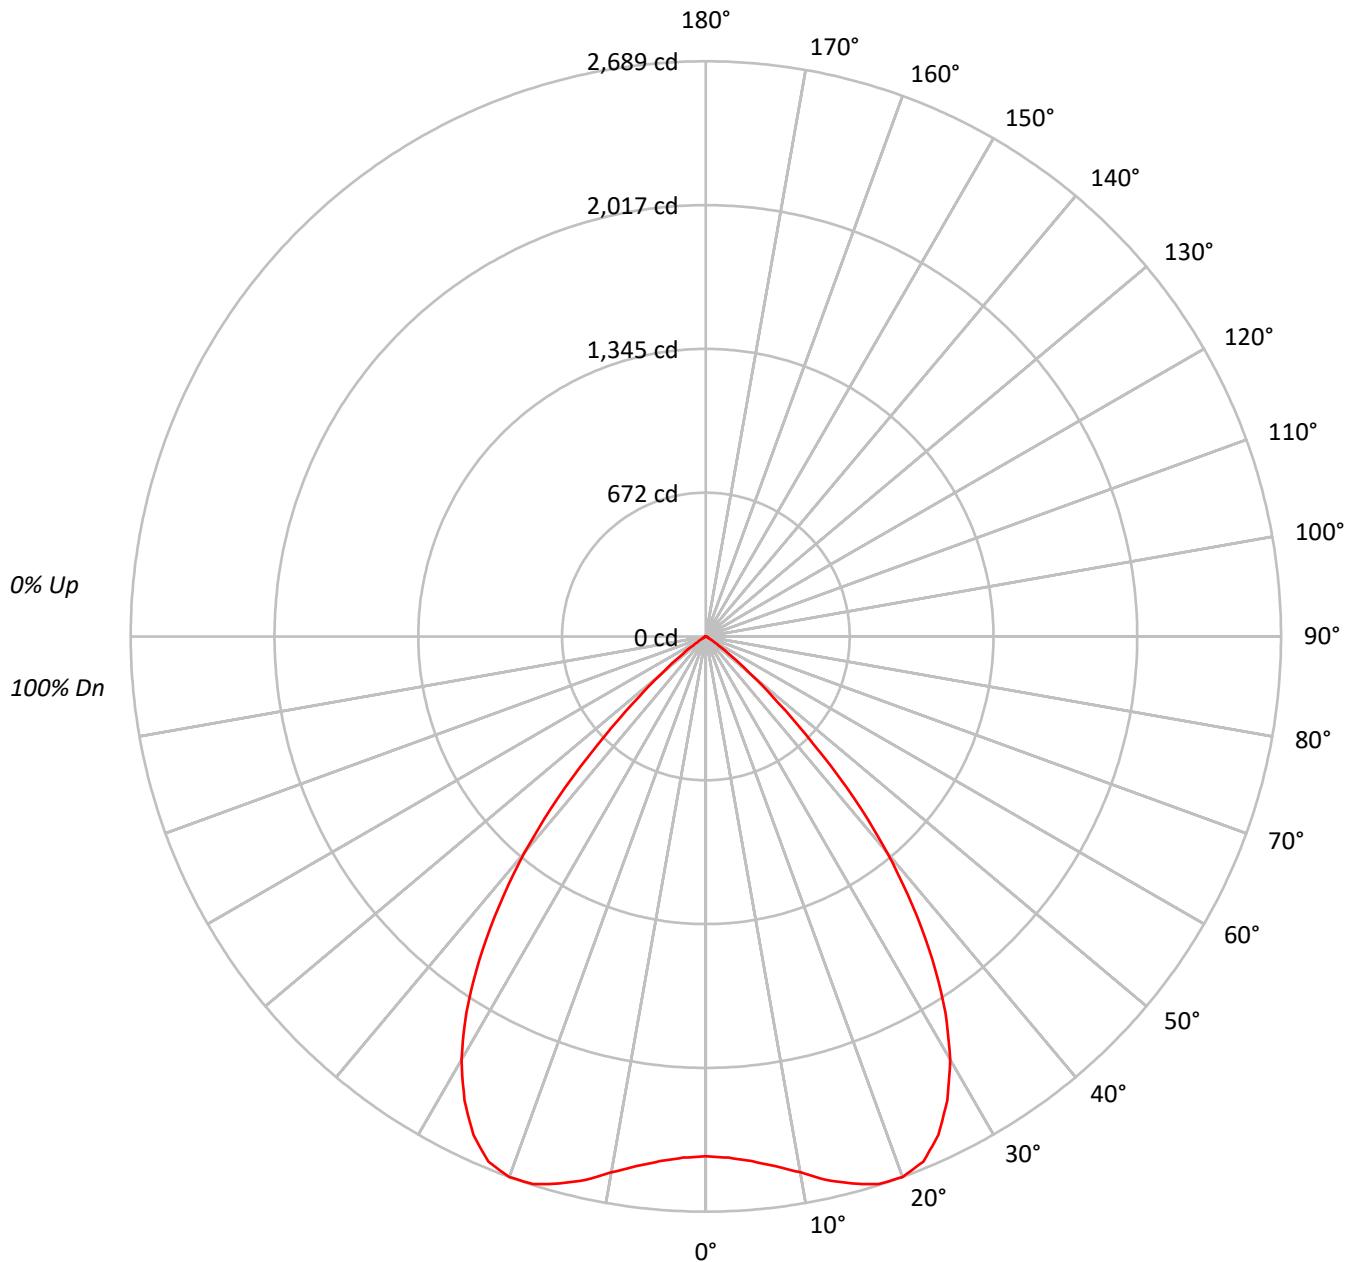



TEST NUMBER: P573471

CATALOG NUMBER: FLD4C-45-D010 FEU4C-X-90-27 F4X-W-X-LI-BL86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	107	105		110	108	105	103		104	102	100		100	98	97		96	95	94
2	106	101	97	93		104	99	95	92		96	93	90		93	90	88		90	88	86
3	100	93	87	83		98	92	86	82		89	85	81		86	83	80		84	81	78
4	94	86	79	75		92	84	79	74		82	77	73		80	76	72		78	75	72
5	88	79	72	68		87	78	72	67		76	71	67		74	70	66		73	69	65
6	83	73	66	62		82	72	66	61		71	65	61		69	64	60		68	63	60
7	78	68	61	56		77	67	61	56		66	60	56		64	59	55		63	59	55
8	74	63	56	52		72	62	56	51		61	55	51		60	55	51		59	54	51
9	69	59	52	48		68	58	52	47		57	51	47		56	51	47		55	50	47
10	66	55	48	44		65	54	48	44		53	48	44		53	47	44		52	47	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	298522
5°	303596
10°	317311
15°	336792
20°	351554
25°	348495
30°	324091
35°	277261
40°	211244
45°	123912
50°	52942
55°	15593
60°	4472
65°	2645
70°	1616
75°	2136
80°	0
85°	0



TEST NUMBER: P573471

CATALOG NUMBER: FLD4C-45-D010 FEU4C-X-90-27 F4X-W-X-LI-BL86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	237.6	6.0
10°-20°	749.9	18.9
20°-30°	1169.9	29.5
30°-40°	1138.3	28.7
40°-50°	568.6	14.3
50°-60°	88.0	2.2
60°-70°	10.6	0.3
70°-80°	3.0	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2157.5	54.4
0°-40°	3295.8	83.1
0°-60°	3952.4	99.7
0°-90°	3966.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3966.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2430	
5°	2462	238
15°	2648	750
25°	2571	1170
35°	1849	1138
45°	713	569
55°	73	88
65°	9	11
75°	4	3
85°	0	0
90°	0	



TEST NUMBER: P573471

CATALOG NUMBER: FLD4C-45-D010 FEU4C-X-90-27 F4X-W-X-LI-BL86

CANDELA DISTRIBUTION (FULL):

	0°
0°	2429.9
2.5°	2439.0
5°	2461.8
7.5°	2498.2
10°	2543.6
12.5°	2602.6
15°	2648.0
17.5°	2684.4
20°	2689.0
22.5°	2657.1
25°	2570.9
27.5°	2443.6
30°	2284.6
32.5°	2084.9
35°	1848.7
37.5°	1589.6
40°	1317.2
42.5°	1026.6
45°	713.2
47.5°	458.7
50°	277.0
52.5°	149.9
55°	72.8
57.5°	31.8
60°	18.2
62.5°	13.6
65°	9.1
67.5°	9.1
70°	4.5
72.5°	4.5
75°	4.5
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)