

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573584

Luminaire Tested: **FLD4C-45-D010 FEU4C-X-90-50 F4X-M-X-H-BL85**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573584
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-45-D010 FEU4C-X-90-50 F4X-M-X-H-BL85
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 5000K, 90 CRI LEDS, 4LBMH TRIM
AND BOTTOM LENS, 0.187" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3201.0 lumens
Efficiency: N/A
Efficacy: 64.5 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 49.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573584

CATALOG NUMBER: FLD4C-45-D010 FEU4C-X-90-50 F4X-M-X-H-BL85

Luminous Intensity Polar Plot

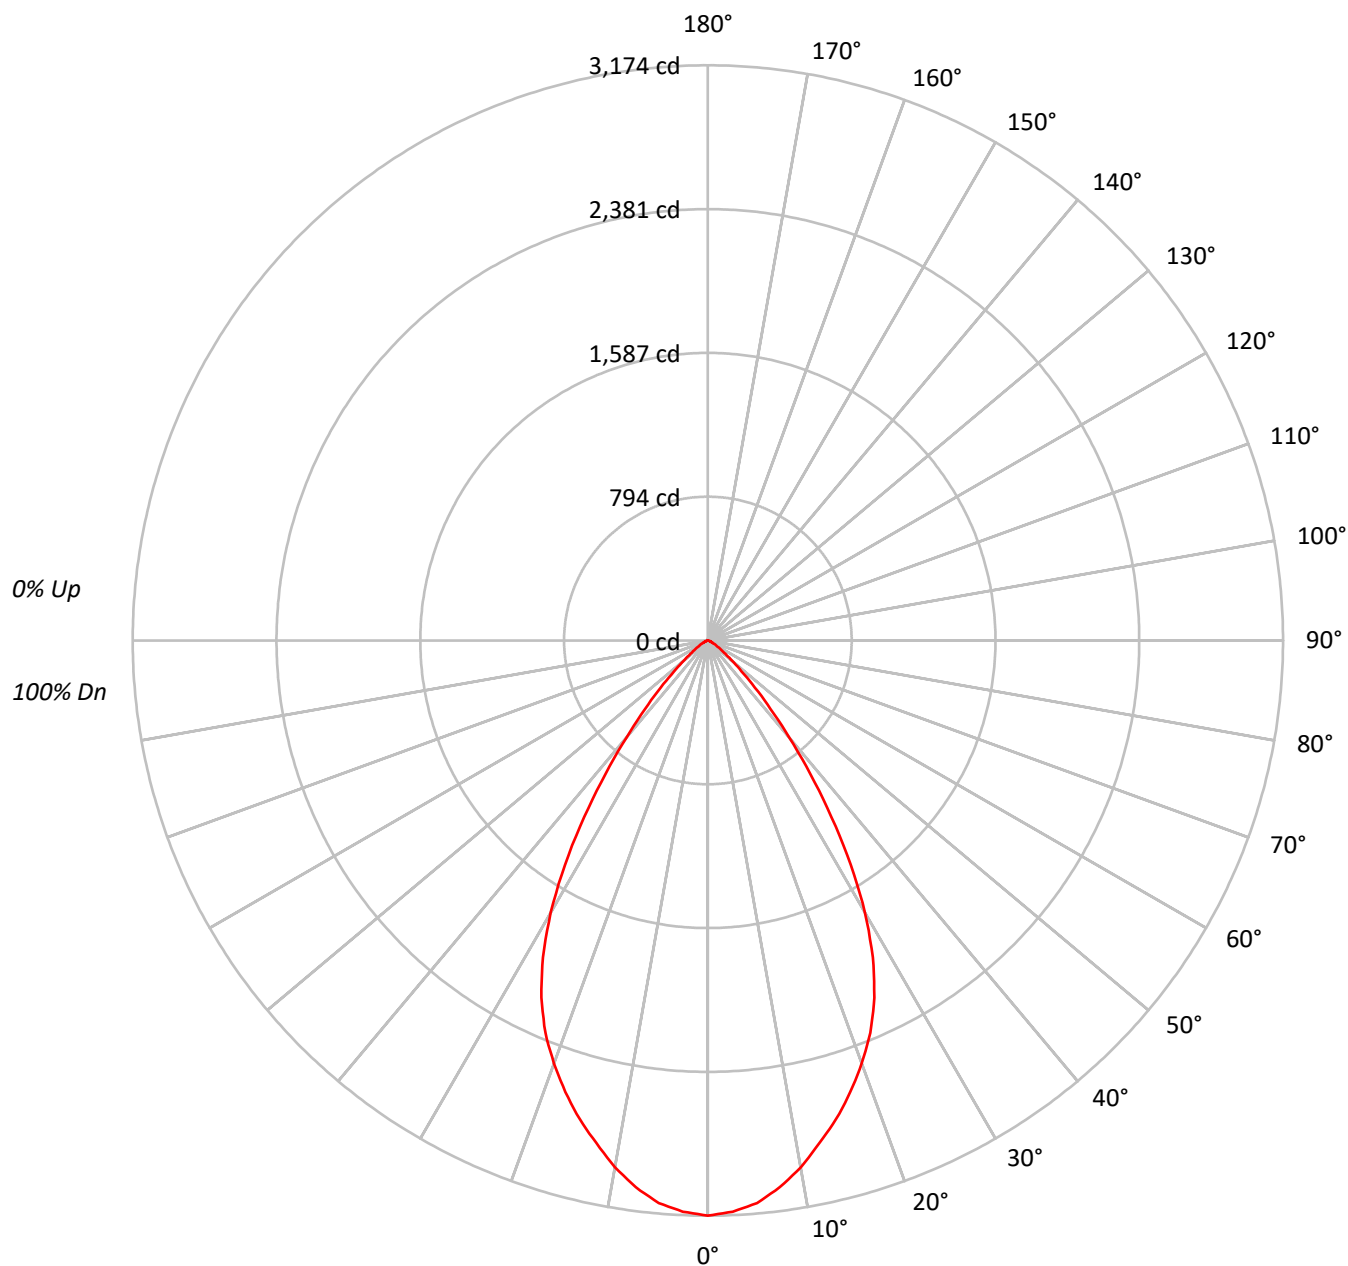



TEST NUMBER: P573584

CATALOG NUMBER: FLD4C-45-D010 FEU4C-X-90-50 F4X-M-X-H-BL85

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	108	105		111	108	106	104		104	102	100		100	99	97		97	96	95
2	107	102	98	94		105	100	96	93		97	94	91		94	91	89		91	89	87
3	101	94	89	85		99	93	88	84		90	86	83		88	84	82		86	83	80
4	96	88	82	77		94	86	81	77		84	80	76		82	78	75		80	77	74
5	90	82	75	71		89	81	75	70		79	74	70		77	73	69		75	72	69
6	86	76	70	65		84	75	69	65		74	68	64		72	68	64		71	67	64
7	81	71	65	60		80	70	64	60		69	64	60		68	63	59		67	62	59
8	77	67	60	56		75	66	60	56		65	59	56		64	59	55		63	58	55
9	73	63	56	52		72	62	56	52		61	56	52		60	55	52		59	55	52
10	69	59	53	49		68	59	53	49		58	52	49		57	52	48		56	52	48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	389937
5°	384274
10°	368221
15°	347781
20°	324635
25°	294694
30°	246040
35°	178247
40°	111572
45°	63780
50°	33256
55°	18634
60°	11868
65°	7035
70°	5208
75°	2278
80°	3396
85°	0



TEST NUMBER: P573584

CATALOG NUMBER: FLD4C-45-D010 FEU4C-X-90-50 F4X-M-X-H-BL85

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	292.1	9.1
10°-20°	766.2	23.9
20°-30°	984.7	30.8
30°-40°	740.9	23.1
40°-50°	297.5	9.3
50°-60°	84.6	2.6
60°-70°	26.8	0.8
70°-80°	7.6	0.2
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2042.9	63.8
0°-40°	2783.8	87.0
0°-60°	3165.9	98.9
0°-90°	3201.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3201.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3174	
5°	3116	292
15°	2734	766
25°	2174	985
35°	1188	741
45°	367	298
55°	87	85
65°	24	27
75°	5	8
85°	0	1
90°	0	



TEST NUMBER: P573584

CATALOG NUMBER: FLD4C-45-D010 FEU4C-X-90-50 F4X-M-X-H-BL85

CANDELA DISTRIBUTION (FULL):

0°	
0°	3174.0
2.5°	3154.7
5°	3116.0
7.5°	3043.5
10°	2951.7
12.5°	2840.7
15°	2734.4
17.5°	2613.6
20°	2483.1
22.5°	2343.1
25°	2174.0
27.5°	1971.0
30°	1734.4
32.5°	1468.6
35°	1188.5
37.5°	927.5
40°	695.7
42.5°	512.1
45°	367.1
47.5°	251.3
50°	174.0
52.5°	120.8
55°	87.0
57.5°	62.8
60°	48.3
62.5°	33.8
65°	24.2
67.5°	19.3
70°	14.5
72.5°	9.7
75°	4.8
77.5°	4.8
80°	4.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)