

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573599

Luminaire Tested: **FLD4C-45-D010 FEU4C-X-90-50 F4X-N-X-H-BL89BV**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573599
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207666)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-45-D010 FEU4C-X-90-50 F4X-N-X-H-BL89BV
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 5000K, 90 CRI LEDS, 4LBNH TRIM
AND BOTTOM LENS, 0.125" CLEAR ACRYLIC

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2934.0 lumens
Efficiency: N/A
Efficacy: 59.2 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 49.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573599

CATALOG NUMBER: FLD4C-45-D010 FEU4C-X-90-50 F4X-N-X-H-BL89BV

Luminous Intensity Polar Plot

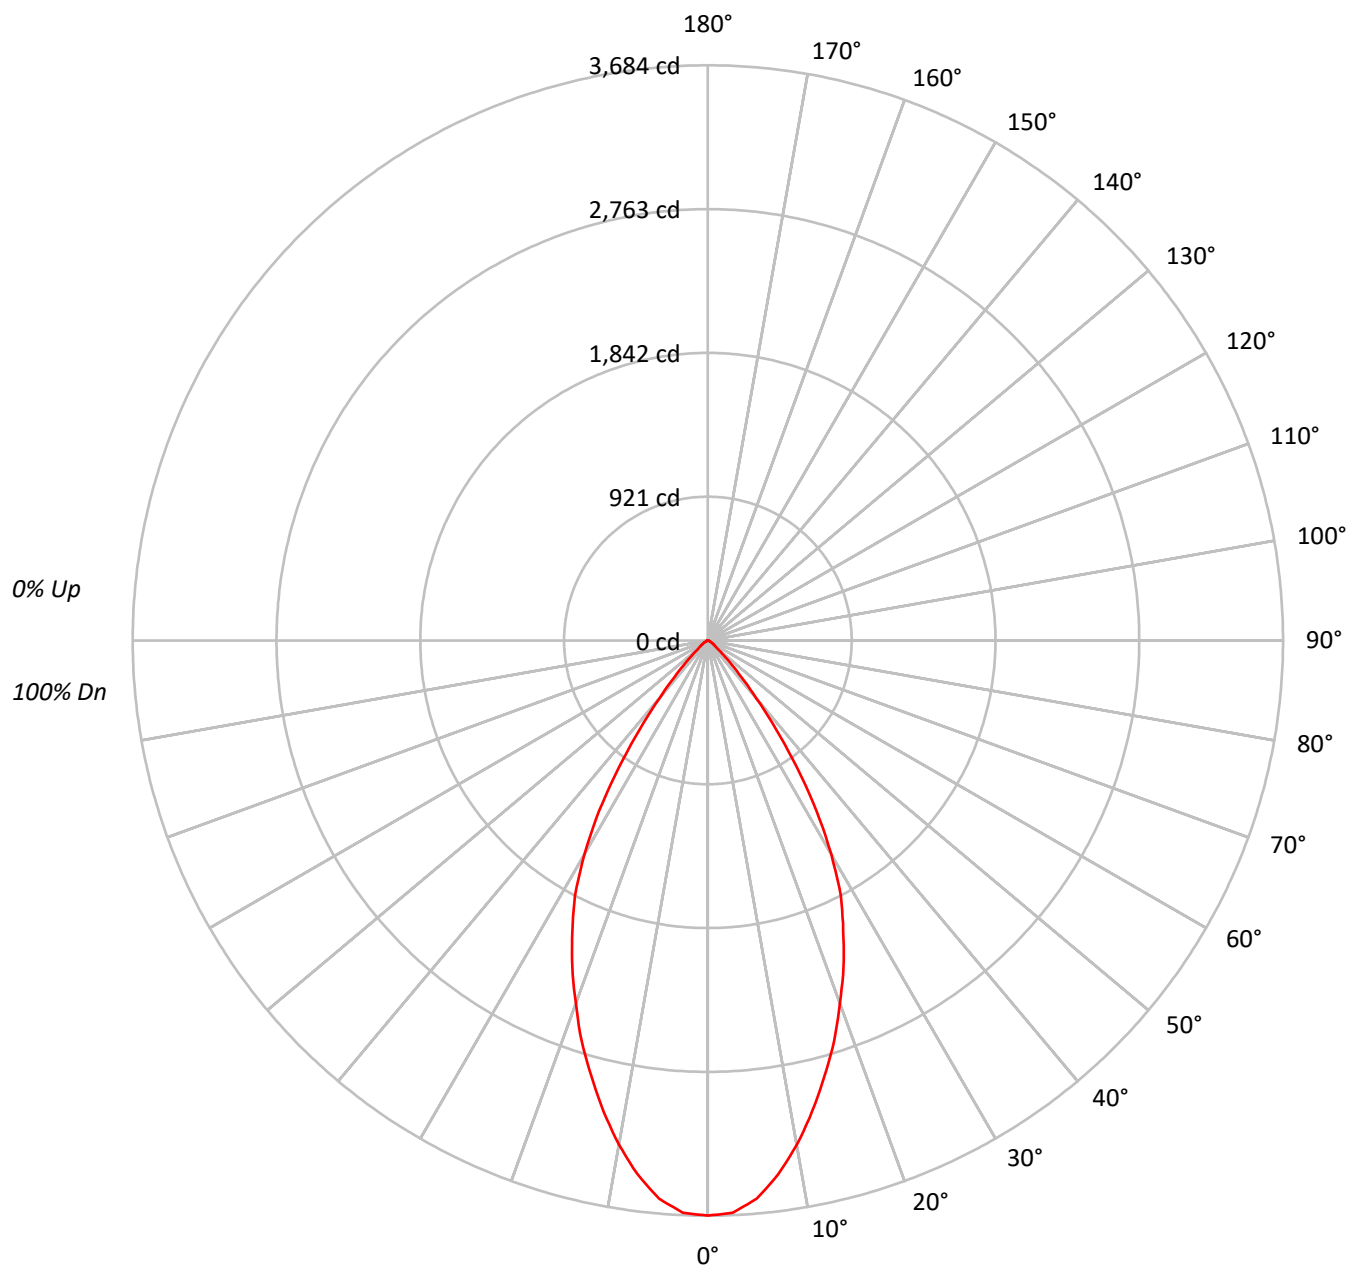



TEST NUMBER: P573599

CATALOG NUMBER: FLD4C-45-D010 FEU4C-X-90-50 F4X-N-X-H-BL89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	111	108	106		111	109	106	104		105	103	101		101	99	98		97	96	95
2	108	103	99	96		106	101	98	94		98	95	92		95	93	90		92	90	89
3	102	96	91	87		100	95	90	86		92	88	85		90	86	84		87	85	82
4	97	90	84	80		95	89	83	79		86	82	78		84	81	78		83	79	77
5	92	84	78	74		91	83	78	73		81	76	73		80	75	72		78	74	72
6	88	79	73	69		86	78	72	68		77	72	68		75	71	67		74	70	67
7	83	74	68	64		82	73	68	64		72	67	63		71	66	63		70	66	63
8	79	70	64	60		78	69	64	60		68	63	59		67	63	59		66	62	59
9	76	66	60	56		74	65	60	56		65	59	56		64	59	56		63	59	55
10	72	62	57	53		71	62	56	53		61	56	53		60	56	52		60	55	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	452568
5°	442494
10°	409126
15°	367113
20°	323158
25°	278116
30°	223967
35°	149092
40°	77557
45°	35113
50°	15233
55°	10217
60°	6560
65°	4651
70°	3843
75°	2516
80°	0
85°	0



TEST NUMBER: P573599

CATALOG NUMBER: FLD4C-45-D010 FEU4C-X-90-50 F4X-N-X-H-BL89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	332.4	11.3
10°-20°	806.2	27.5
20°-30°	936.0	31.9
30°-40°	619.9	21.1
40°-50°	173.9	5.9
50°-60°	43.7	1.5
60°-70°	16.4	0.6
70°-80°	5.6	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2074.6	70.7
0°-40°	2694.4	91.8
0°-60°	2912.0	99.2
0°-90°	2934.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2934.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3684	
5°	3588	332
15°	2886	806
25°	2052	936
35°	994	620
45°	202	174
55°	48	44
65°	16	16
75°	5	6
85°	0	0
90°	0	



TEST NUMBER: P573599

CATALOG NUMBER: FLD4C-45-D010 FEU4C-X-90-50 F4X-N-X-H-BL89BV

CANDELA DISTRIBUTION (FULL):

	0°
0°	3683.8
2.5°	3667.8
5°	3588.1
7.5°	3449.7
10°	3279.6
12.5°	3088.2
15°	2886.4
17.5°	2689.7
20°	2471.8
22.5°	2269.8
25°	2051.7
27.5°	1844.5
30°	1578.8
32.5°	1297.0
35°	994.1
37.5°	712.3
40°	483.6
42.5°	313.5
45°	202.1
47.5°	122.4
50°	79.7
52.5°	58.4
55°	47.7
57.5°	37.3
60°	26.7
62.5°	21.3
65°	16.0
67.5°	10.7
70°	10.7
72.5°	5.3
75°	5.3
77.5°	5.3
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)