

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573626

Luminaire Tested: **FLD4C-50-D010 FEU4C-X-90-27 F4X-M-X-LI-BL85**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573626
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205108)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-50-D010 FEU4C-X-90-27 F4X-M-X-LI-BL85
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 4LBMLI TRIM
AND BOTTOM LENS, 0.187" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4198.0 lumens
Efficiency: N/A
Efficacy: 71.9 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 58.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573626

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-27 F4X-M-X-LI-BL85

Luminous Intensity Polar Plot

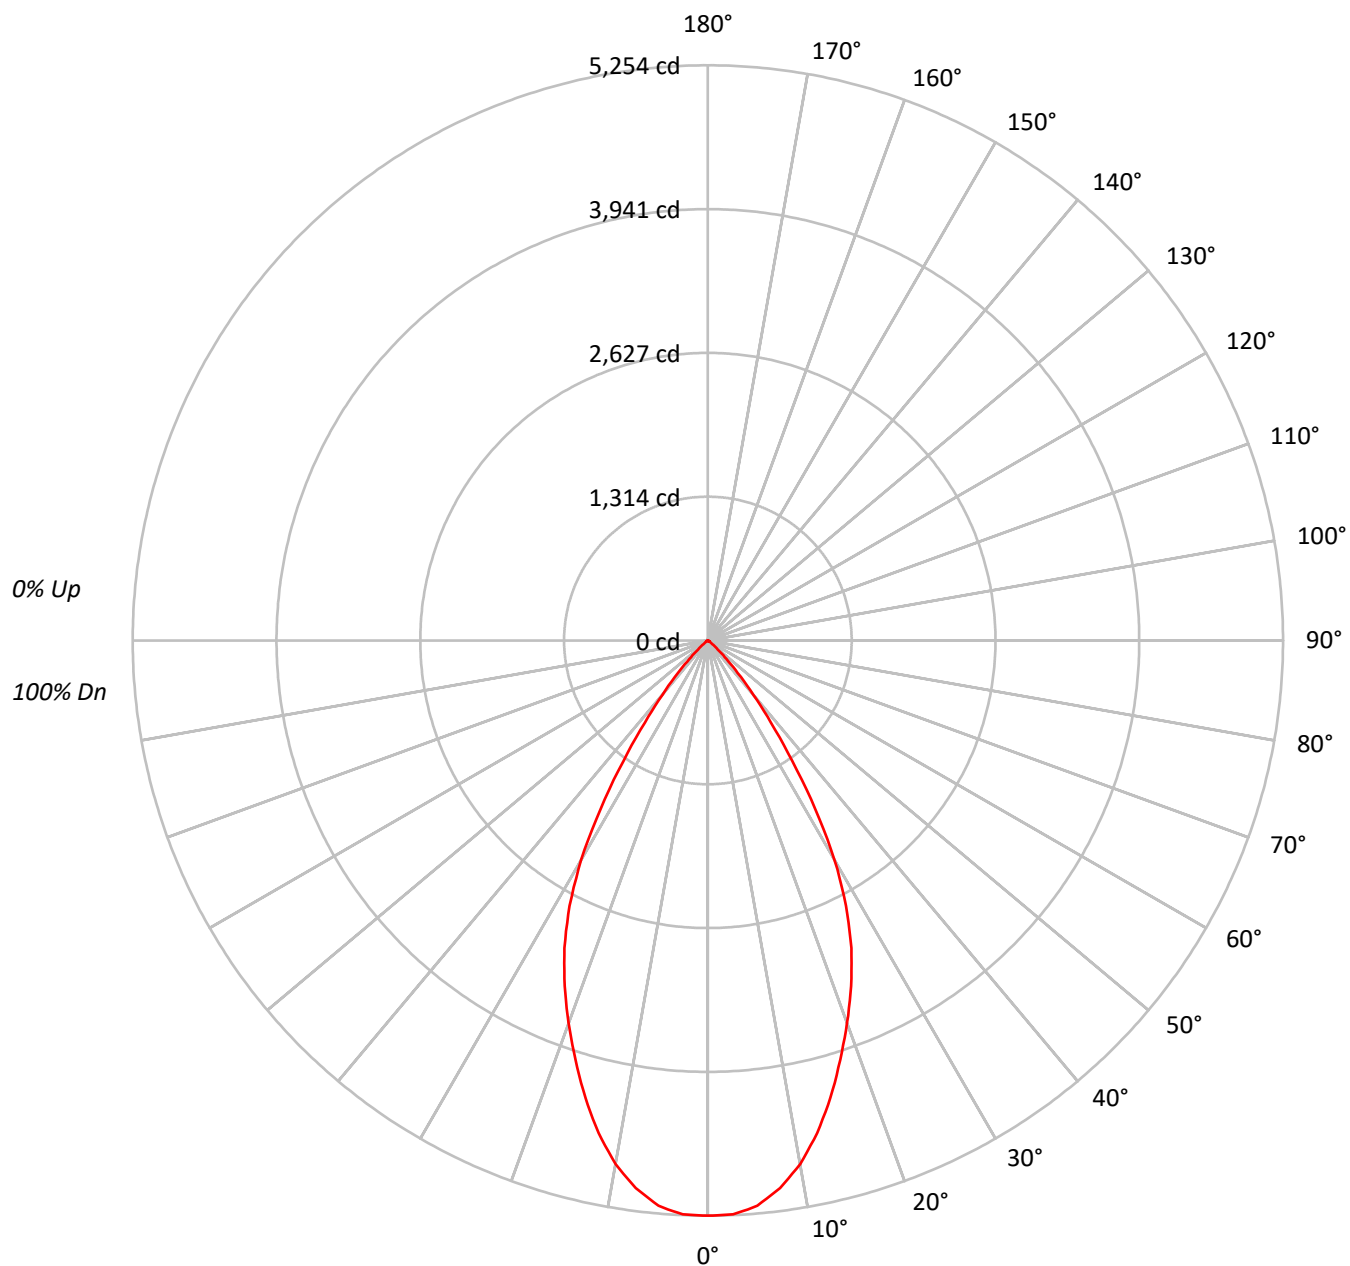



TEST NUMBER: P573626

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-27 F4X-M-X-LI-BL85

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	109	106		111	109	107	105		105	103	101		101	100	98		98	97	96
2	108	103	100	96		106	102	98	95		99	96	93		96	93	91		93	91	89
3	103	97	92	88		101	95	91	87		93	89	86		90	87	85		88	85	83
4	98	91	85	81		96	89	84	81		87	83	80		85	82	79		83	80	78
5	93	85	79	75		91	84	79	75		82	78	74		81	77	73		79	76	73
6	89	80	74	70		87	79	74	70		78	73	69		76	72	69		75	71	68
7	84	75	69	65		83	75	69	65		73	68	65		72	68	64		71	67	64
8	80	71	65	61		79	70	65	61		69	64	61		68	64	60		67	63	60
9	77	67	61	57		75	67	61	57		66	61	57		65	60	57		64	60	57
10	73	64	58	54		72	63	58	54		62	57	54		62	57	54		61	57	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	645423
5°	639281
10°	605780
15°	549996
20°	485992
25°	420163
30°	328432
35°	201418
40°	103377
45°	41072
50°	13341
55°	4605
60°	3931
65°	3140
70°	1940
75°	2563
80°	0
85°	0



TEST NUMBER: P573626

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-27 F4X-M-X-LI-BL85

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	484.0	11.5
10°-20°	1204.9	28.7
20°-30°	1400.7	33.4
30°-40°	857.7	20.4
40°-50°	213.0	5.1
50°-60°	24.9	0.6
60°-70°	9.3	0.2
70°-80°	3.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3089.6	73.6
0°-40°	3947.3	94.0
0°-60°	4185.2	99.7
0°-90°	4198.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4198.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5254	
5°	5184	484
15°	4324	1205
25°	3100	1401
35°	1343	858
45°	236	213
55°	22	25
65°	11	9
75°	5	4
85°	0	0
90°	0	



TEST NUMBER: P573626

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-27 F4X-M-X-LI-BL85

CANDELA DISTRIBUTION (FULL):

	0°
0°	5253.6
2.5°	5248.2
5°	5183.8
7.5°	5044.1
10°	4856.0
12.5°	4609.0
15°	4324.3
17.5°	4018.1
20°	3717.3
22.5°	3416.4
25°	3099.6
27.5°	2734.3
30°	2315.2
32.5°	1826.4
35°	1343.0
37.5°	945.4
40°	644.6
42.5°	402.8
45°	236.4
47.5°	134.3
50°	69.8
52.5°	32.3
55°	21.5
57.5°	16.0
60°	16.0
62.5°	10.8
65°	10.8
67.5°	5.4
70°	5.4
72.5°	5.4
75°	5.4
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)