

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573637

Luminaire Tested: **FLD4C-50-D010 FEU4C-X-90-27 F4X-N-X-LI-BL84**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573637
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-50-D010 FEU4C-X-90-27 F4X-N-X-LI-BL84
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 4LBNI TRIM
AND BOTTOM LENS, 0.125" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3455.0 lumens
Efficiency: N/A
Efficacy: 59.2 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 58.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573637

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-27 F4X-N-X-LI-BL84

Luminous Intensity Polar Plot

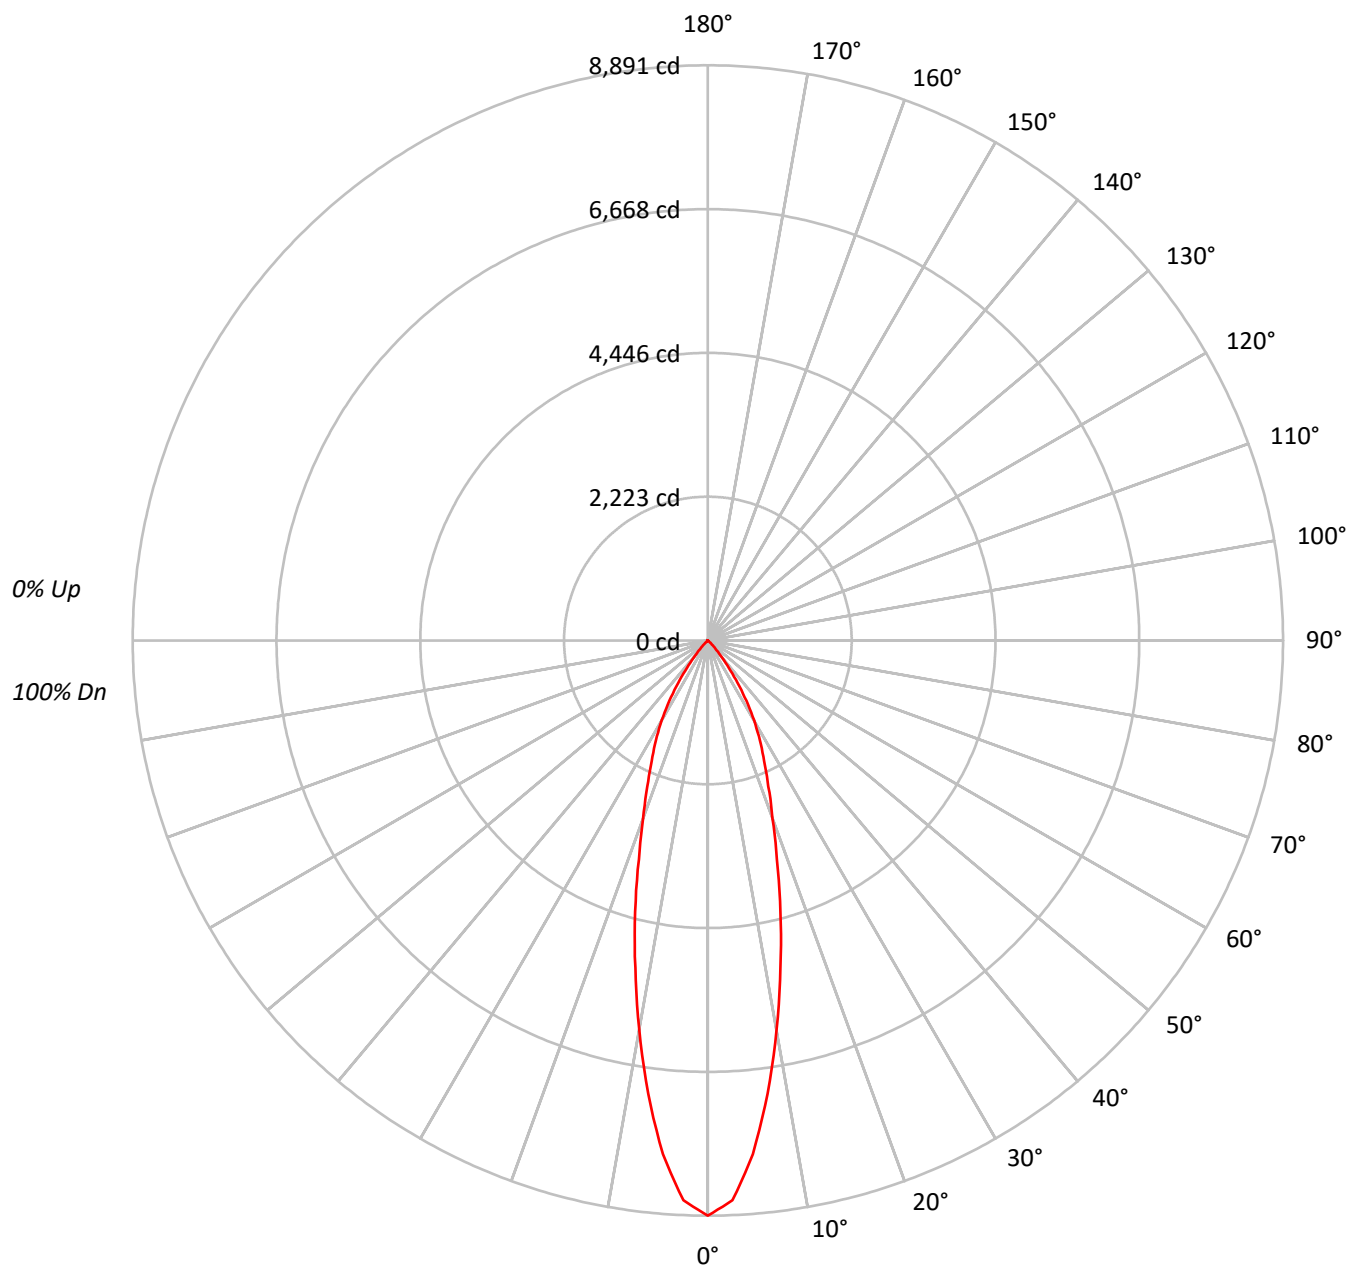



TEST NUMBER: P573637

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-27 F4X-N-X-LI-BL84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10			50	30	10			0
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111			106	106	106			100
1	114	112	110	108		112	110	108	106		106	104	103			102	101	100			95
2	109	105	102	99		107	103	100	98		100	98	95			97	95	93			90
3	105	99	95	92		103	98	94	91		95	92	89			93	90	88			85
4	101	94	89	86		99	93	88	85		91	87	84			89	86	83			81
5	96	89	84	80		95	88	84	80		87	82	79			85	81	79			77
6	92	85	80	76		91	84	79	76		83	78	75			81	78	75			73
7	89	81	76	72		88	80	75	72		79	75	71			78	74	71			69
8	85	77	72	68		84	77	72	68		76	71	68			75	71	68			66
9	82	74	69	65		81	73	68	65		72	68	65			72	68	65			63
10	79	71	66	62		78	70	65	62		69	65	62			69	65	62			61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1092315
5°	982969
10°	762015
15°	551548
20°	381899
25°	278414
30°	202291
35°	119711
40°	50341
45°	15706
50°	2045
55°	1135
60°	1302
65°	1541
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P573637

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-27 F4X-N-X-LI-BL84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	700.7	20.3
10°-20°	1199.6	34.7
20°-30°	953.4	27.6
30°-40°	504.7	14.6
40°-50°	87.0	2.5
50°-60°	6.5	0.2
60°-70°	3.2	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2853.6	82.6
0°-40°	3358.3	97.2
0°-60°	3451.8	99.9
0°-90°	3455.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3455.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8891	
5°	7971	701
15°	4336	1200
25°	2054	953
35°	798	505
45°	90	87
55°	5	7
65°	5	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P573637

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-27 F4X-N-X-LI-BL84

CANDELA DISTRIBUTION (FULL):

	0°
0°	8891.2
2.5°	8662.3
5°	7970.7
7.5°	7066.2
10°	6108.4
12.5°	5182.6
15°	4336.5
17.5°	3549.0
20°	2921.1
22.5°	2442.2
25°	2053.9
27.5°	1740.0
30°	1426.0
32.5°	1106.8
35°	798.2
37.5°	526.9
40°	313.9
42.5°	180.9
45°	90.4
47.5°	32.0
50°	10.7
52.5°	10.7
55°	5.3
57.5°	5.3
60°	5.3
62.5°	5.3
65°	5.3
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)