

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573651

Luminaire Tested: **FLD4C-50-D010 FEU4C-X-90-27 F4X-W-X-LI-BL86**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573651
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208077)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-50-D010 FEU4C-X-90-27 F4X-W-X-LI-BL86
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 4LBWLI TRIM
AND BOTTOM LENS, 0.250" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4493.1 lumens
Efficiency: N/A
Efficacy: 76.9 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.18
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 58.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573651

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-27 F4X-W-X-LI-BL86

Luminous Intensity Polar Plot

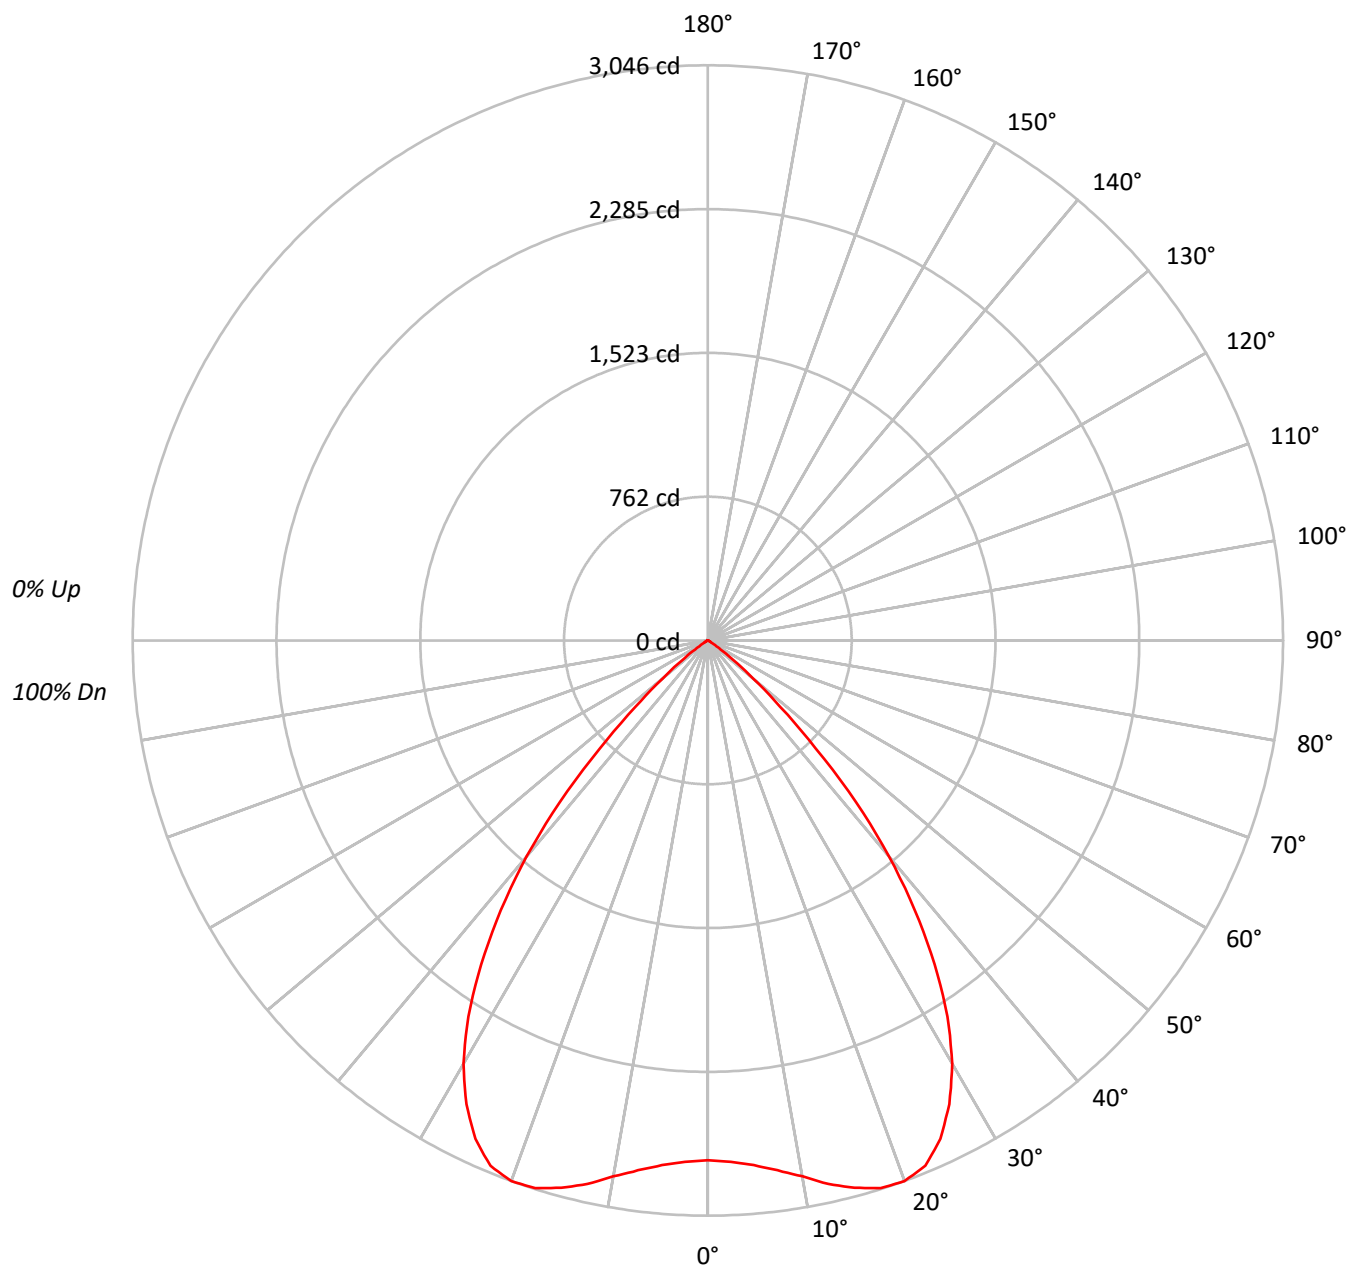



TEST NUMBER: P573651

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-27 F4X-W-X-LI-BL86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	107	105		110	108	105	103		104	102	100		100	98	97		96	95	94
2	106	101	97	93		104	99	95	92		96	93	90		93	90	88		90	88	86
3	100	93	87	83		98	92	86	82		89	85	81		86	83	80		84	81	78
4	94	86	79	75		92	84	79	74		82	77	73		80	76	72		78	75	72
5	88	79	72	68		87	78	72	67		76	71	67		74	70	66		73	69	65
6	83	73	66	62		82	72	66	61		71	65	61		69	64	60		68	63	60
7	78	68	61	56		77	67	61	56		66	60	56		64	59	55		63	59	55
8	74	63	56	52		72	62	56	51		61	55	51		60	55	51		59	54	51
9	69	59	52	48		68	58	52	47		57	51	47		56	51	47		55	50	47
10	66	55	48	44		65	54	48	44		53	48	44		53	47	44		52	47	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	338191
5°	343935
10°	359476
15°	381549
20°	398267
25°	394814
30°	367159
35°	314096
40°	239310
45°	140365
50°	59975
55°	17649
60°	5062
65°	2994
70°	1868
75°	2468
80°	0
85°	0



TEST NUMBER: P573651

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-27 F4X-W-X-LI-BL86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	269.2	6.0
10°-20°	849.6	18.9
20°-30°	1325.4	29.5
30°-40°	1289.6	28.7
40°-50°	644.1	14.3
50°-60°	99.7	2.2
60°-70°	12.1	0.3
70°-80°	3.4	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2444.2	54.4
0°-40°	3733.7	83.1
0°-60°	4477.6	99.7
0°-90°	4493.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4493.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2753	
5°	2789	269
15°	3000	850
25°	2913	1325
35°	2094	1290
45°	808	644
55°	82	100
65°	10	12
75°	5	3
85°	0	0
90°	0	



TEST NUMBER: P573651

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-27 F4X-W-X-LI-BL86

CANDELA DISTRIBUTION (FULL):

	0°
0°	2752.8
2.5°	2763.1
5°	2788.9
7.5°	2830.1
10°	2881.6
12.5°	2948.4
15°	2999.9
17.5°	3041.1
20°	3046.3
22.5°	3010.2
25°	2912.6
27.5°	2768.3
30°	2588.2
32.5°	2362.0
35°	2094.3
37.5°	1800.9
40°	1492.2
42.5°	1163.0
45°	807.9
47.5°	519.7
50°	313.8
52.5°	169.8
55°	82.4
57.5°	36.1
60°	20.6
62.5°	15.5
65°	10.3
67.5°	10.3
70°	5.2
72.5°	5.2
75°	5.2
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)