

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573703

Luminaire Tested: **FLD4C-50-D010 FEU4C-X-90-35 F4X-N-X-H-BL84**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573703
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207666)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-50-D010 FEU4C-X-90-35 F4X-N-X-H-BL84
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 3500K, 90 CRI LEDS, 4LBNH TRIM
AND BOTTOM LENS, 0.125" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3091.0 lumens
Efficiency: N/A
Efficacy: 52.9 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 58.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573703

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-35 F4X-N-X-H-BL84

Luminous Intensity Polar Plot

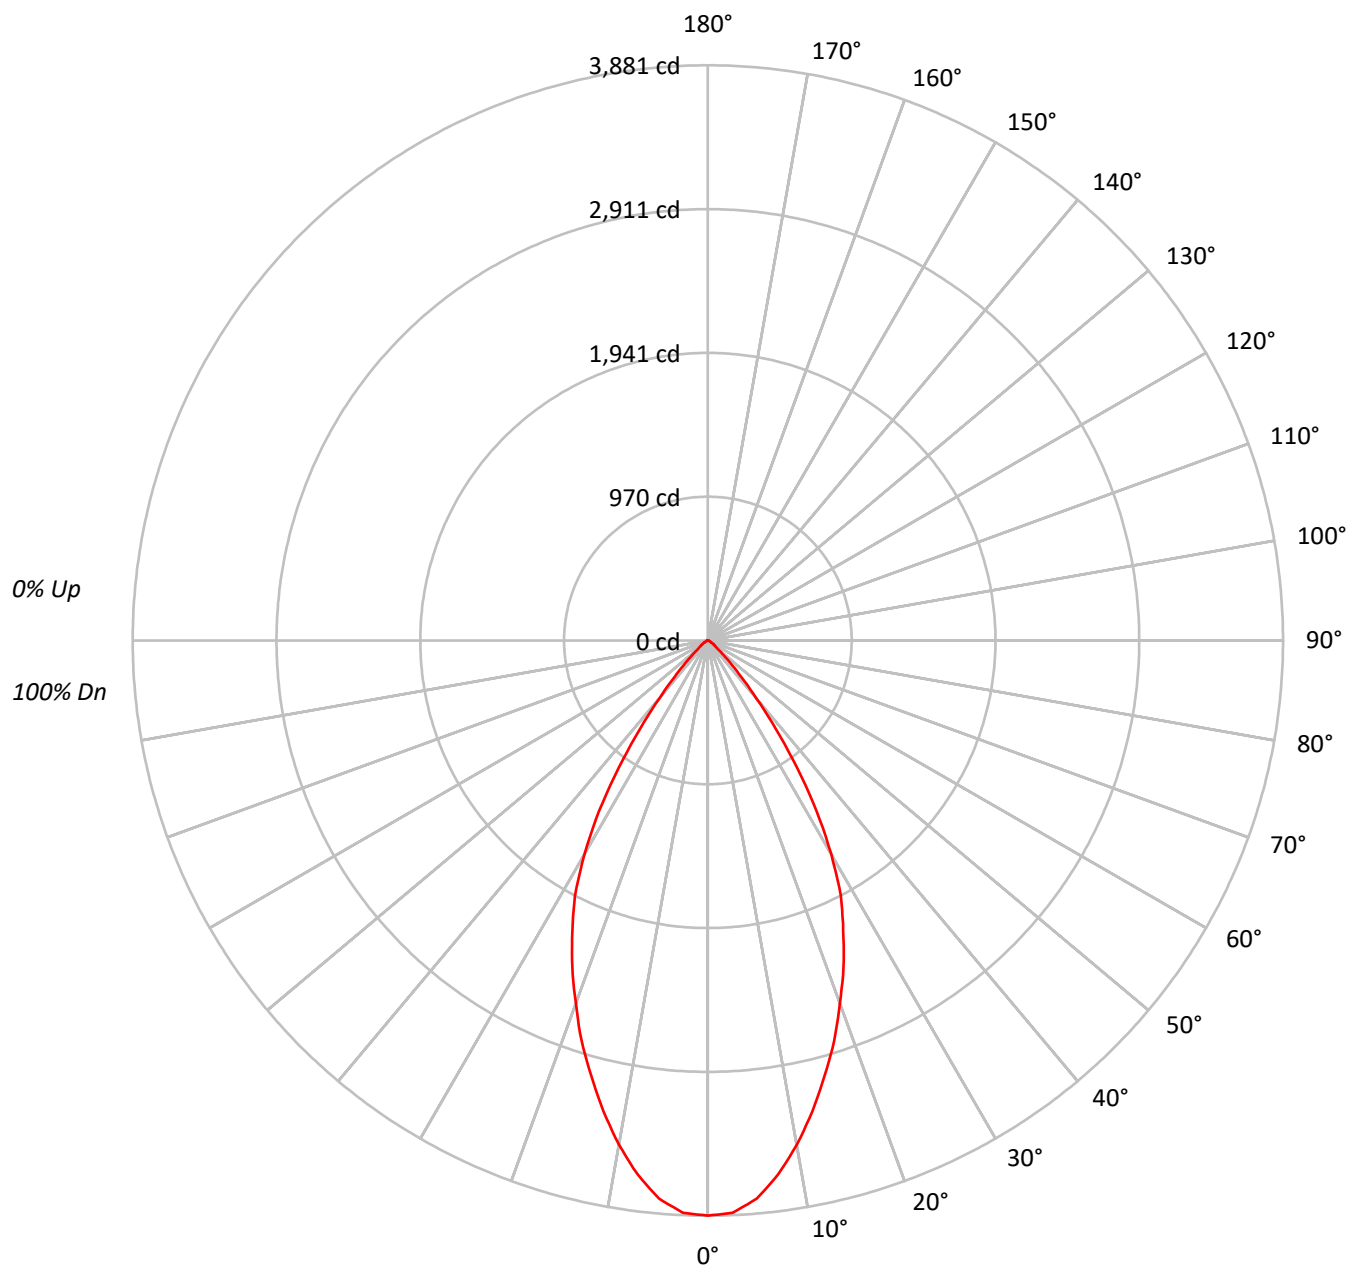



TEST NUMBER: P573703

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-35 F4X-N-X-H-BL84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	111	108	106		111	109	106	104		105	103	101		101	99	98		97	96	95
2	108	103	99	96		106	101	98	94		98	95	92		95	93	90		92	90	89
3	102	96	91	87		100	95	90	86		92	88	85		90	86	84		87	85	82
4	97	90	84	80		95	89	83	79		86	82	78		84	81	78		83	79	77
5	92	84	78	74		91	83	78	73		81	76	73		80	75	72		78	74	72
6	88	79	73	69		86	78	72	68		77	72	68		75	71	67		74	70	67
7	83	74	68	64		82	73	68	64		72	67	63		71	66	63		70	66	63
8	79	70	64	60		78	69	64	60		68	63	59		67	63	59		66	62	59
9	76	66	60	56		74	65	60	56		65	59	56		64	59	56		63	59	55
10	72	62	57	53		71	62	56	53		61	56	53		60	56	52		60	55	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	476782
5°	466172
10°	431019
15°	386751
20°	340455
25°	293000
30°	235940
35°	157070
40°	81710
45°	36989
50°	16055
55°	10774
60°	6904
65°	4884
70°	4023
75°	2658
80°	0
85°	0



TEST NUMBER: P573703

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-35 F4X-N-X-H-BL84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	350.1	11.3
10°-20°	849.3	27.5
20°-30°	986.1	31.9
30°-40°	653.0	21.1
40°-50°	183.2	5.9
50°-60°	46.0	1.5
60°-70°	17.3	0.6
70°-80°	5.9	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2185.6	70.7
0°-40°	2838.6	91.8
0°-60°	3067.8	99.2
0°-90°	3091.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3091.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3881	
5°	3780	350
15°	3041	849
25°	2162	986
35°	1047	653
45°	213	183
55°	50	46
65°	17	17
75°	6	6
85°	0	0
90°	0	



TEST NUMBER: P573703

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-35 F4X-N-X-H-BL84

CANDELA DISTRIBUTION (FULL):

	0°
0°	3880.9
2.5°	3864.0
5°	3780.1
7.5°	3634.3
10°	3455.1
12.5°	3253.5
15°	3040.8
17.5°	2833.6
20°	2604.1
22.5°	2391.2
25°	2161.5
27.5°	1943.2
30°	1663.2
32.5°	1366.4
35°	1047.3
37.5°	750.4
40°	509.5
42.5°	330.3
45°	212.9
47.5°	128.9
50°	84.0
52.5°	61.5
55°	50.3
57.5°	39.3
60°	28.1
62.5°	22.5
65°	16.8
67.5°	11.2
70°	11.2
72.5°	5.6
75°	5.6
77.5°	5.6
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)