

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573758

Luminaire Tested: **FLD4C-50-D010 FEU4C-X-90-40 F4X-W-X-LI-BL85**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573758
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208077)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-50-D010 FEU4C-X-90-40 F4X-W-X-LI-BL85
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 4000K, 90 CRI LEDS, 4LBWLI TRIM
AND BOTTOM LENS, 0.187" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4678.0 lumens
Efficiency: N/A
Efficacy: 80.1 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.18
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 58.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573758

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-40 F4X-W-X-LI-BL85

Luminous Intensity Polar Plot

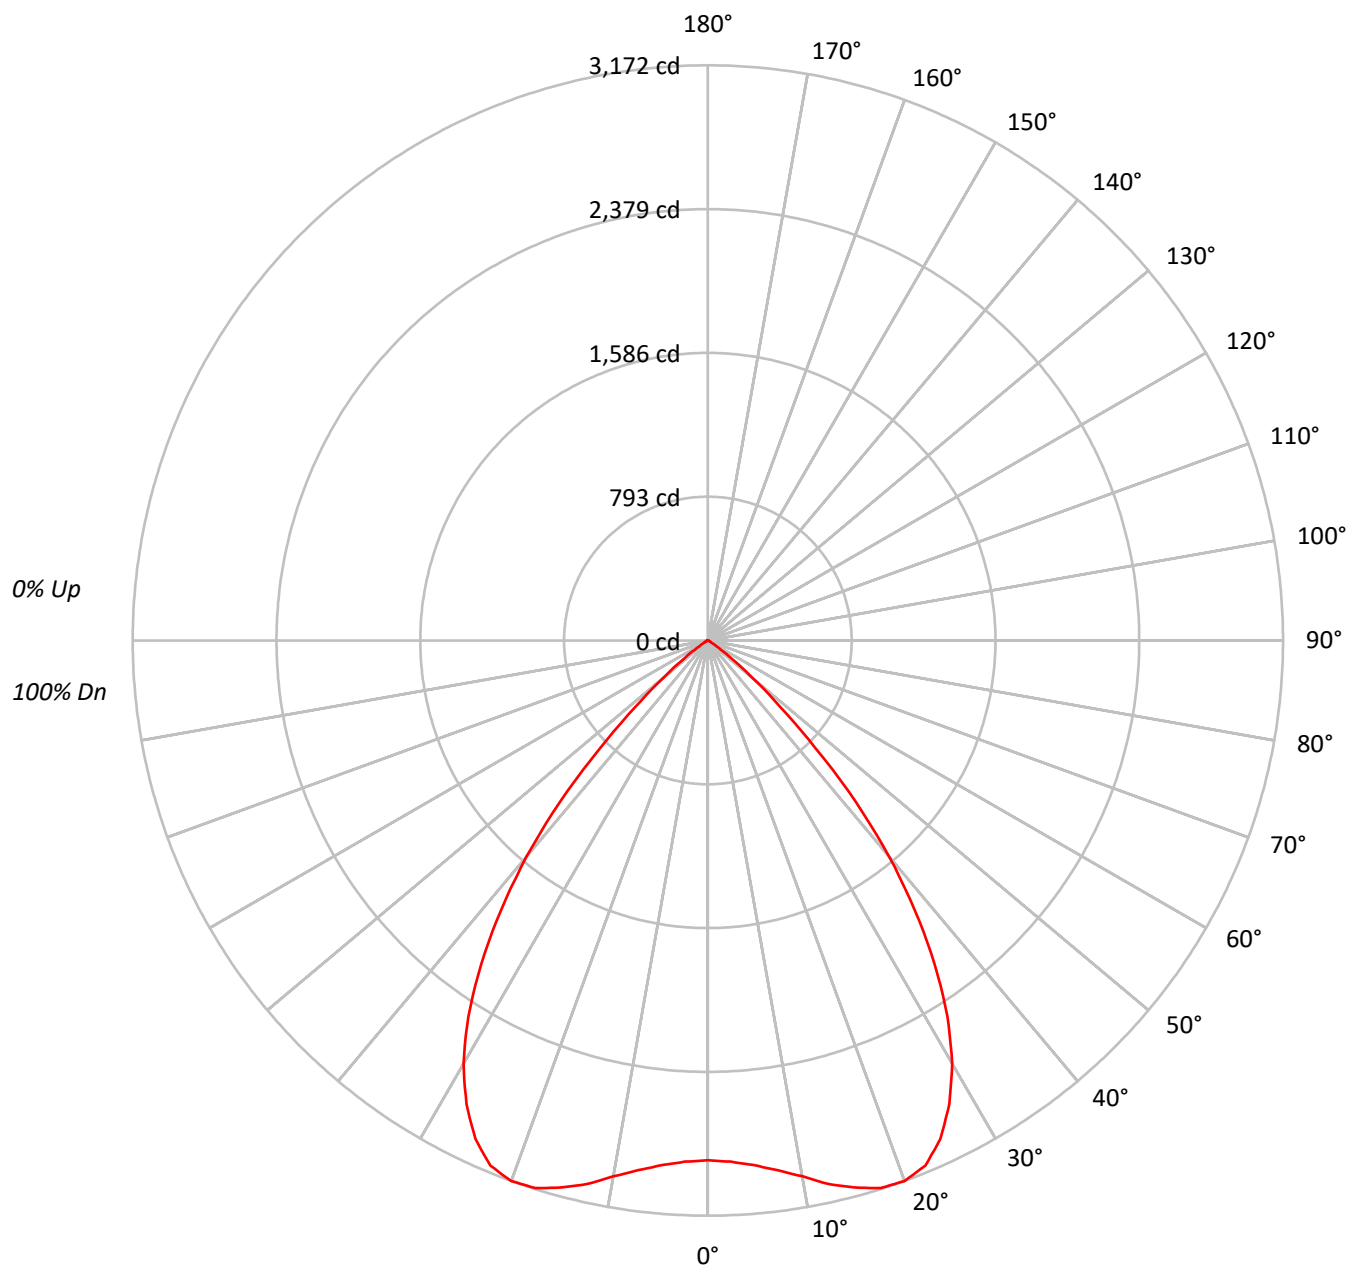



TEST NUMBER: P573758

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-40 F4X-W-X-LI-BL85

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96
2	106	101	97	93	104	99	95	92	96	93	90		93	90	88		90
3	100	93	87	83	98	92	86	82	89	85	81		86	83	80		84
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78
5	88	79	72	68	87	78	72	67	76	71	67		74	70	66		73
6	83	73	66	62	82	72	66	61	71	65	61		69	64	60		68
7	78	68	61	56	77	67	61	56	66	60	56		64	59	55		63
8	74	63	56	52	72	62	56	51	61	55	51		60	55	51		59
9	69	59	52	48	68	58	52	47	57	51	47		56	51	47		55
10	66	55	48	44	65	54	48	44	53	48	44		53	47	44		52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	352123
5°	358092
10°	374283
15°	397257
20°	414662
25°	411067
30°	382282
35°	327024
40°	249173
45°	146151
50°	62441
55°	18377
60°	5283
65°	3110
70°	1940
75°	2563
80°	0
85°	0



TEST NUMBER: P573758

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-40 F4X-W-X-LI-BL85

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	280.3	6.0
10°-20°	884.6	18.9
20°-30°	1379.9	29.5
30°-40°	1342.7	28.7
40°-50°	670.6	14.3
50°-60°	103.8	2.2
60°-70°	12.6	0.3
70°-80°	3.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2544.8	54.4
0°-40°	3887.5	83.1
0°-60°	4661.9	99.7
0°-90°	4678.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4678.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2866	
5°	2904	280
15°	3123	885
25°	3032	1380
35°	2180	1343
45°	841	671
55°	86	104
65°	11	13
75°	5	4
85°	0	0
90°	0	



TEST NUMBER: P573758

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-40 F4X-W-X-LI-BL85

CANDELA DISTRIBUTION (FULL):

	0°
0°	2866.2
2.5°	2876.9
5°	2903.7
7.5°	2946.6
10°	3000.3
12.5°	3069.8
15°	3123.4
17.5°	3166.3
20°	3171.7
22.5°	3134.2
25°	3032.5
27.5°	2882.3
30°	2694.8
32.5°	2459.2
35°	2180.5
37.5°	1875.0
40°	1553.7
42.5°	1210.8
45°	841.2
47.5°	541.1
50°	326.7
52.5°	176.8
55°	85.8
57.5°	37.5
60°	21.5
62.5°	16.1
65°	10.7
67.5°	10.7
70°	5.4
72.5°	5.4
75°	5.4
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)