

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573771

Luminaire Tested: **FLD4C-50-D010 FEU4C-X-90-50 F4X-M-X-LI-BL86**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573771
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205108)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-50-D010 FEU4C-X-90-50 F4X-M-X-LI-BL86
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 5000K, 90 CRI LEDS, 4LBMLI TRIM
AND BOTTOM LENS, 0.250" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4587.0 lumens
Efficiency: N/A
Efficacy: 78.5 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 58.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573771

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-50 F4X-M-X-LI-BL86

Luminous Intensity Polar Plot

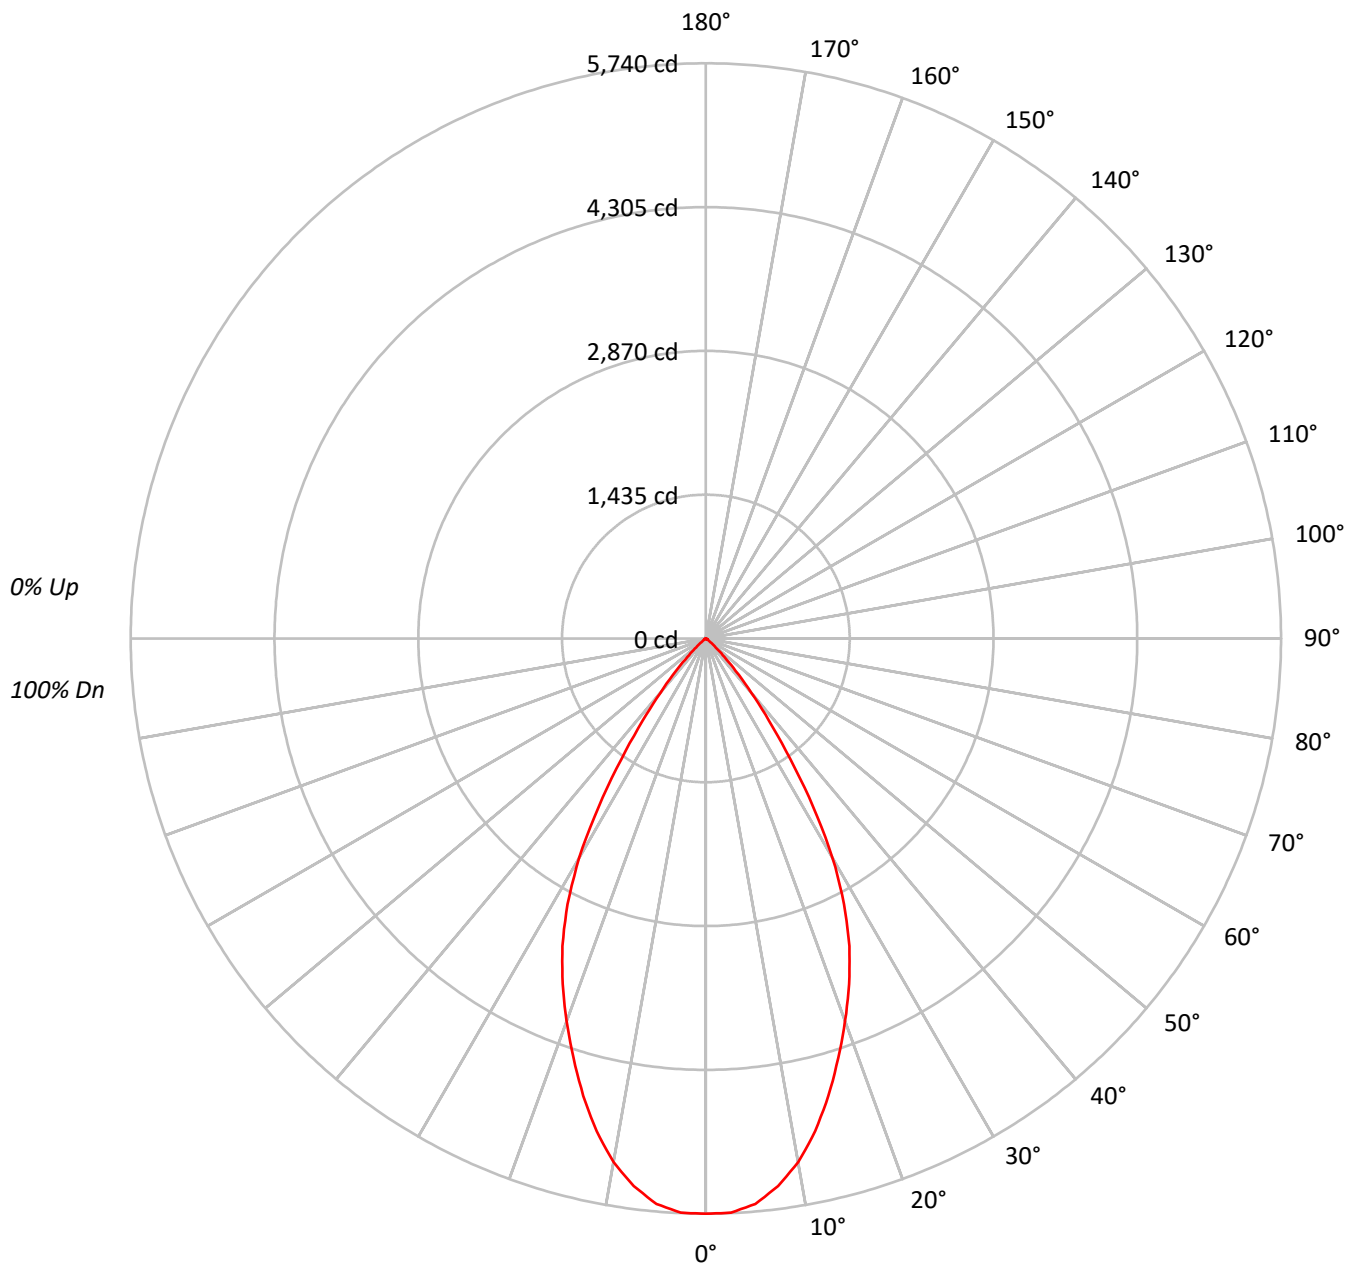



TEST NUMBER: P573771

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-50 F4X-M-X-LI-BL86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	109	106		111	109	107	105		105	103	101		101	100	98		98	97	96
2	108	103	100	96		106	102	98	95		99	96	93		96	93	91		93	91	89
3	103	97	92	88		101	95	91	87		93	89	86		90	87	85		88	85	83
4	98	91	85	81		96	89	84	81		87	83	80		85	82	79		83	80	78
5	93	85	79	75		91	84	79	75		82	78	74		81	77	73		79	76	73
6	89	80	74	70		87	79	74	70		78	73	69		76	72	69		75	71	68
7	84	75	69	65		83	75	69	65		73	68	65		72	68	64		71	67	64
8	80	71	65	61		79	70	65	61		69	64	61		68	64	60		67	63	60
9	77	67	61	57		75	67	61	57		66	61	57		65	60	57		64	60	57
10	73	64	58	54		72	63	58	54		62	57	54		62	57	54		61	57	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	705228
5°	698525
10°	661917
15°	600960
20°	531031
25°	459094
30°	358861
35°	220075
40°	112967
45°	44877
50°	14564
55°	5012
60°	4300
65°	3430
70°	2119
75°	2801
80°	0
85°	0



TEST NUMBER: P573771

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-50 F4X-M-X-LI-BL86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	528.8	11.5
10°-20°	1316.6	28.7
20°-30°	1530.4	33.4
30°-40°	937.2	20.4
40°-50°	232.7	5.1
50°-60°	27.2	0.6
60°-70°	10.2	0.2
70°-80°	3.9	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3375.8	73.6
0°-40°	4313.0	94.0
0°-60°	4572.9	99.7
0°-90°	4587.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4587.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5740	
5°	5664	529
15°	4725	1317
25°	3387	1530
35°	1467	937
45°	258	233
55°	23	27
65°	12	10
75°	6	4
85°	0	0
90°	0	



TEST NUMBER: P573771

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-50 F4X-M-X-LI-BL86

CANDELA DISTRIBUTION (FULL):

0°	
0°	5740.4
2.5°	5734.5
5°	5664.2
7.5°	5511.5
10°	5306.0
12.5°	5036.1
15°	4725.0
17.5°	4390.4
20°	4061.8
22.5°	3733.0
25°	3386.8
27.5°	2987.6
30°	2529.7
32.5°	1995.6
35°	1467.4
37.5°	1033.0
40°	704.4
42.5°	440.1
45°	258.3
47.5°	146.8
50°	76.2
52.5°	35.3
55°	23.4
57.5°	17.5
60°	17.5
62.5°	11.8
65°	11.8
67.5°	5.9
70°	5.9
72.5°	5.9
75°	5.9
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)