

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573772

Luminaire Tested: **FLD4C-50-D010 FEU4C-X-90-50 F4X-M-X-LI-BL89AM**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573772
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205108)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-50-D010 FEU4C-X-90-50 F4X-M-X-LI-BL89AM
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 5000K, 90 CRI LEDS, 4LBMLI TRIM
AND BOTTOM LENS, 0.125" OPAL POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2058.1 lumens
Efficiency: N/A
Efficacy: 35.2 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 58.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573772

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-50 F4X-M-X-LI-BL89AM

Luminous Intensity Polar Plot

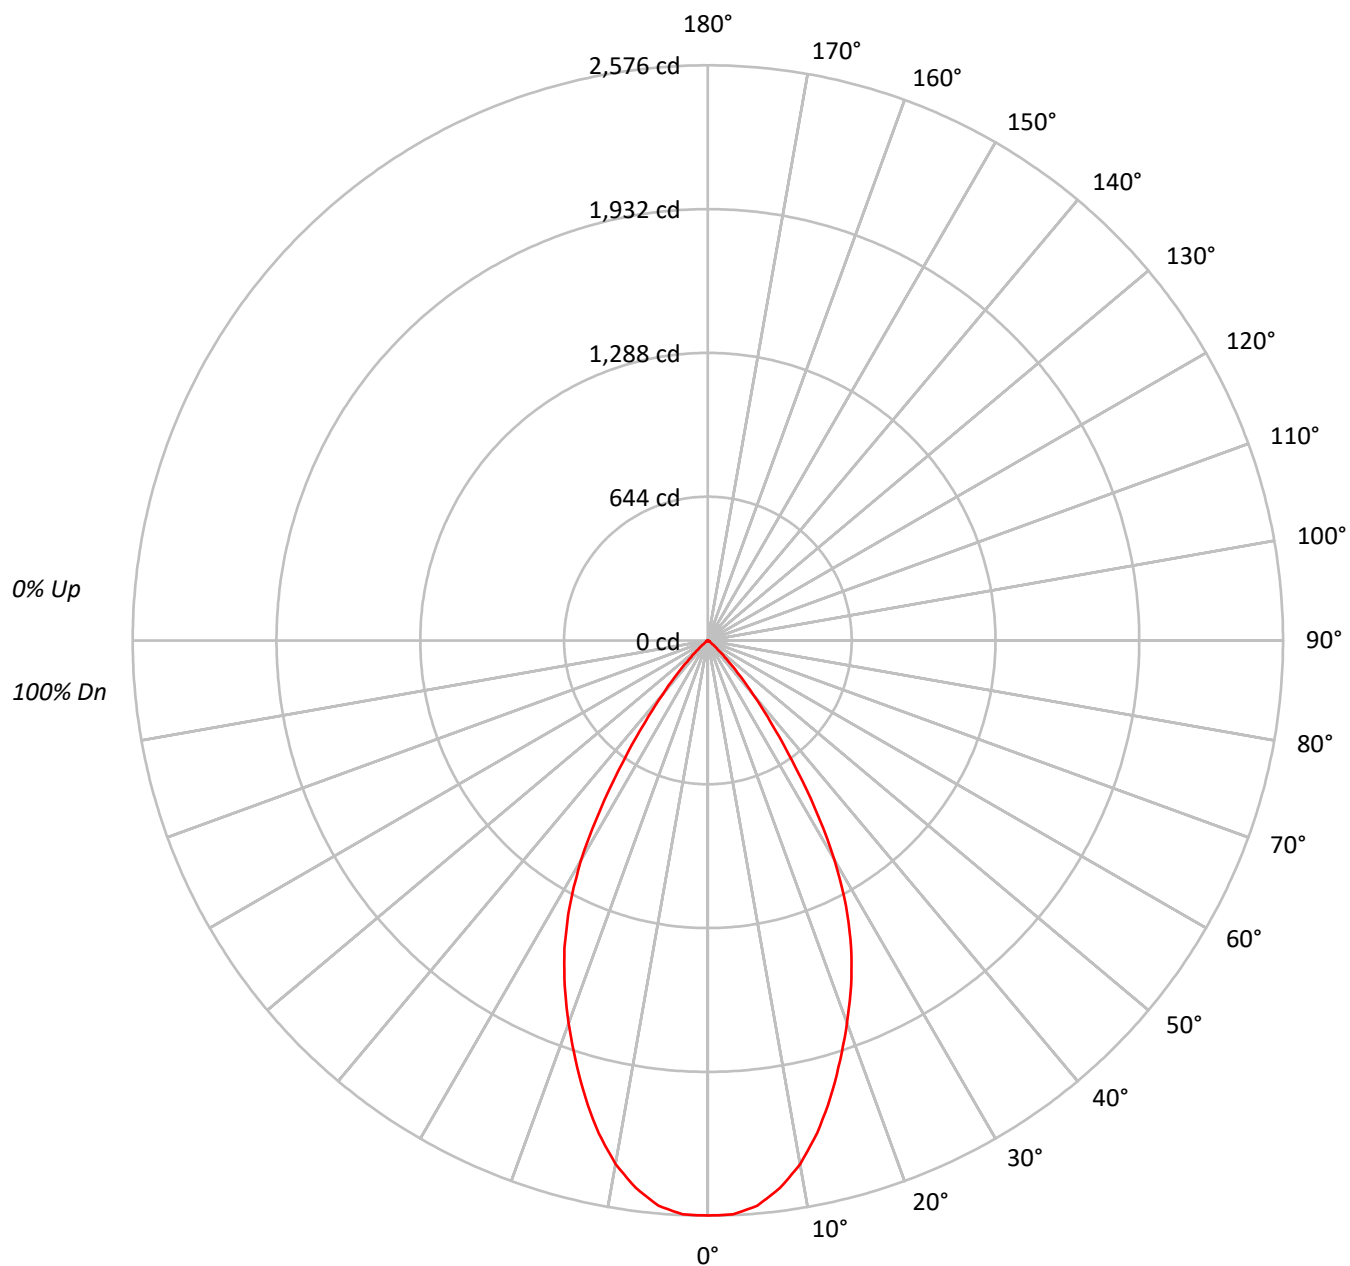

TEST NUMBER: P573772

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-50 F4X-M-X-LI-BL89AM

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94			
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88			
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82			
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76			
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67			
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63			
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	316409
5°	313400
10°	296977
15°	269624
20°	238257
25°	205974
30°	161010
35°	98744
40°	50678
45°	20137
50°	6537
55°	2249
60°	1941
65°	1541
70°	970
75°	1282
80°	0
85°	0



TEST NUMBER: P573772

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-50 F4X-M-X-LI-BL89AM

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	237.3	11.5
10°-20°	590.7	28.7
20°-30°	686.6	33.4
30°-40°	420.5	20.4
40°-50°	104.4	5.1
50°-60°	12.2	0.6
60°-70°	4.6	0.2
70°-80°	1.8	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1514.6	73.6
0°-40°	1935.1	94.0
0°-60°	2051.7	99.7
0°-90°	2058.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2058.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2576	
5°	2541	237
15°	2120	591
25°	1520	687
35°	658	421
45°	116	104
55°	10	12
65°	5	5
75°	3	2
85°	0	0
90°	0	



TEST NUMBER: P573772

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-50 F4X-M-X-LI-BL89AM

CANDELA DISTRIBUTION (FULL):

	0°
0°	2575.5
2.5°	2572.8
5°	2541.3
7.5°	2472.8
10°	2380.6
12.5°	2259.5
15°	2119.9
17.5°	1969.8
20°	1822.4
22.5°	1674.8
25°	1519.5
27.5°	1340.4
30°	1135.0
32.5°	895.4
35°	658.4
37.5°	463.5
40°	316.0
42.5°	197.5
45°	115.9
47.5°	65.9
50°	34.2
52.5°	15.8
55°	10.5
57.5°	7.9
60°	7.9
62.5°	5.3
65°	5.3
67.5°	2.7
70°	2.7
72.5°	2.7
75°	2.7
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)