

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573783

Luminaire Tested: **FLD4C-50-D010 FEU4C-X-90-50 F4X-N-X-LI-BL86**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573783
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD4C-50-D010 FEU4C-X-90-50 F4X-N-X-LI-BL86
Description: 4 INCH FAIL-SAFE LED DOWNLIGHT WITH 5000K, 90 CRI LEDS, 4LBNLI TRIM
AND BOTTOM LENS, 0.250" CLEAR POLYCARBONATE

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3599.0 lumens
Efficiency: N/A
Efficacy: 61.6 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 58.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573783

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-50 F4X-N-X-LI-BL86

Luminous Intensity Polar Plot

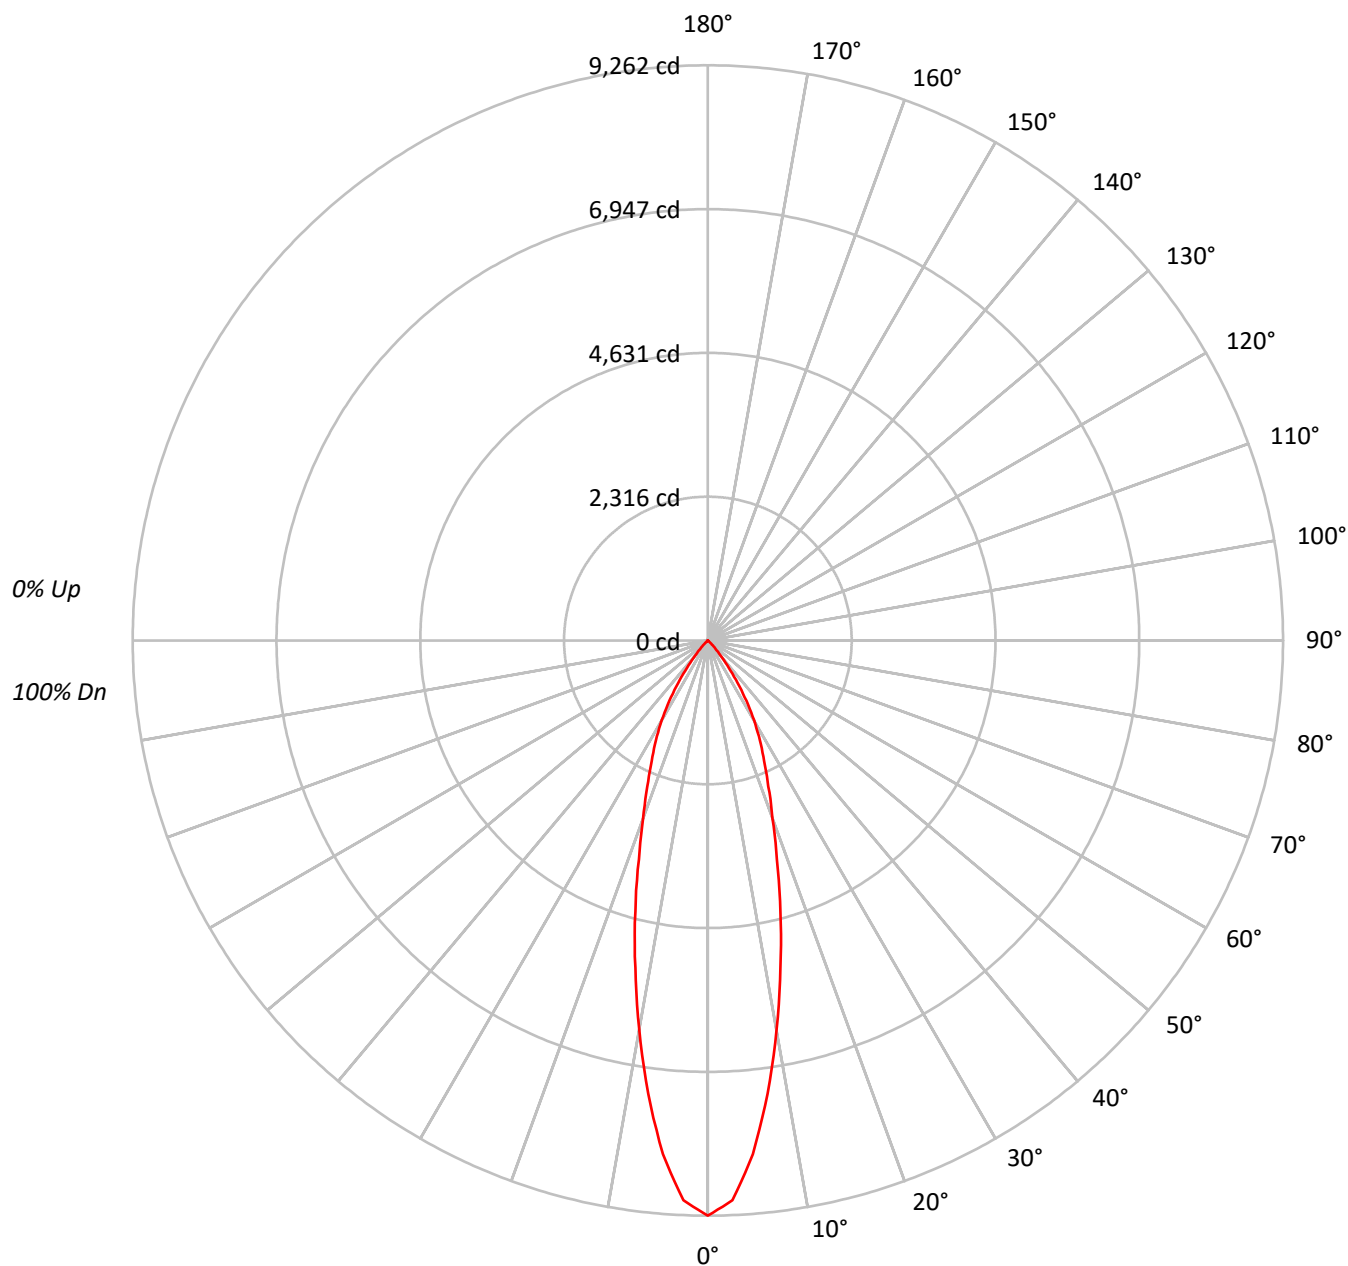



TEST NUMBER: P573783

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-50 F4X-N-X-LI-BL86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95
3	105	99	95	92	103	98	94	91	95	92	89		93	90	88		91
4	101	94	89	86	99	93	88	85	91	87	84		89	86	83		87
5	96	89	84	80	95	88	84	80	87	82	79		85	81	79		83
6	92	85	80	76	91	84	79	76	83	78	75		81	78	75		80
7	89	81	76	72	88	80	75	72	79	75	71		78	74	71		77
8	85	77	72	68	84	77	72	68	76	71	68		75	71	68		74
9	82	74	69	65	81	73	68	65	72	68	65		72	68	65		71
10	79	71	66	62	78	70	65	62	69	65	62		69	65	62		68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1137844
5°	1023937
10°	793776
15°	574530
20°	397809
25°	290017
30°	210732
35°	124690
40°	52442
45°	16349
50°	2121
55°	1199
60°	1376
65°	1628
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P573783

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-50 F4X-N-X-LI-BL86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	729.9	20.3
10°-20°	1249.6	34.7
20°-30°	993.1	27.6
30°-40°	525.7	14.6
40°-50°	90.6	2.5
50°-60°	6.8	0.2
60°-70°	3.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2972.5	82.6
0°-40°	3498.3	97.2
0°-60°	3595.6	99.9
0°-90°	3599.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3599.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9262	
5°	8303	730
15°	4517	1250
25°	2140	993
35°	831	526
45°	94	91
55°	6	7
65°	6	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P573783

CATALOG NUMBER: FLD4C-50-D010 FEU4C-X-90-50 F4X-N-X-LI-BL86

CANDELA DISTRIBUTION (FULL):

	0°
0°	9261.8
2.5°	9023.3
5°	8302.9
7.5°	7360.7
10°	6363.0
12.5°	5398.6
15°	4517.2
17.5°	3696.9
20°	3042.8
22.5°	2544.0
25°	2139.5
27.5°	1812.5
30°	1485.5
32.5°	1152.9
35°	831.4
37.5°	548.8
40°	327.0
42.5°	188.5
45°	94.1
47.5°	33.3
50°	11.1
52.5°	11.1
55°	5.6
57.5°	5.6
60°	5.6
62.5°	5.6
65°	5.6
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)