

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P727282

Luminaire Tested: **MRI-DRV-FLD4C-05-L930 F4LC-M-X-H**

Issue Date: 08/03/2023



**Test Information**

Test Method: LM-79-08  
Report Number: P727282  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 08/03/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: MRI-DRV-FLD4C-05-L930 F4LC-M-X-H  
Description: 4 INCH FAIL-SAFE MRI REMOTE DRIVER LED DOWNLIGHT WITH 3000K, 90 CRI  
LEDS, 4LBMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 492.0 lumens  
Efficiency: N/A  
Efficacy: 68.3 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P727282

CATALOG NUMBER: MRI-DRV-FLD4C-05-L930 F4LC-M-X-H

### Luminous Intensity Polar Plot

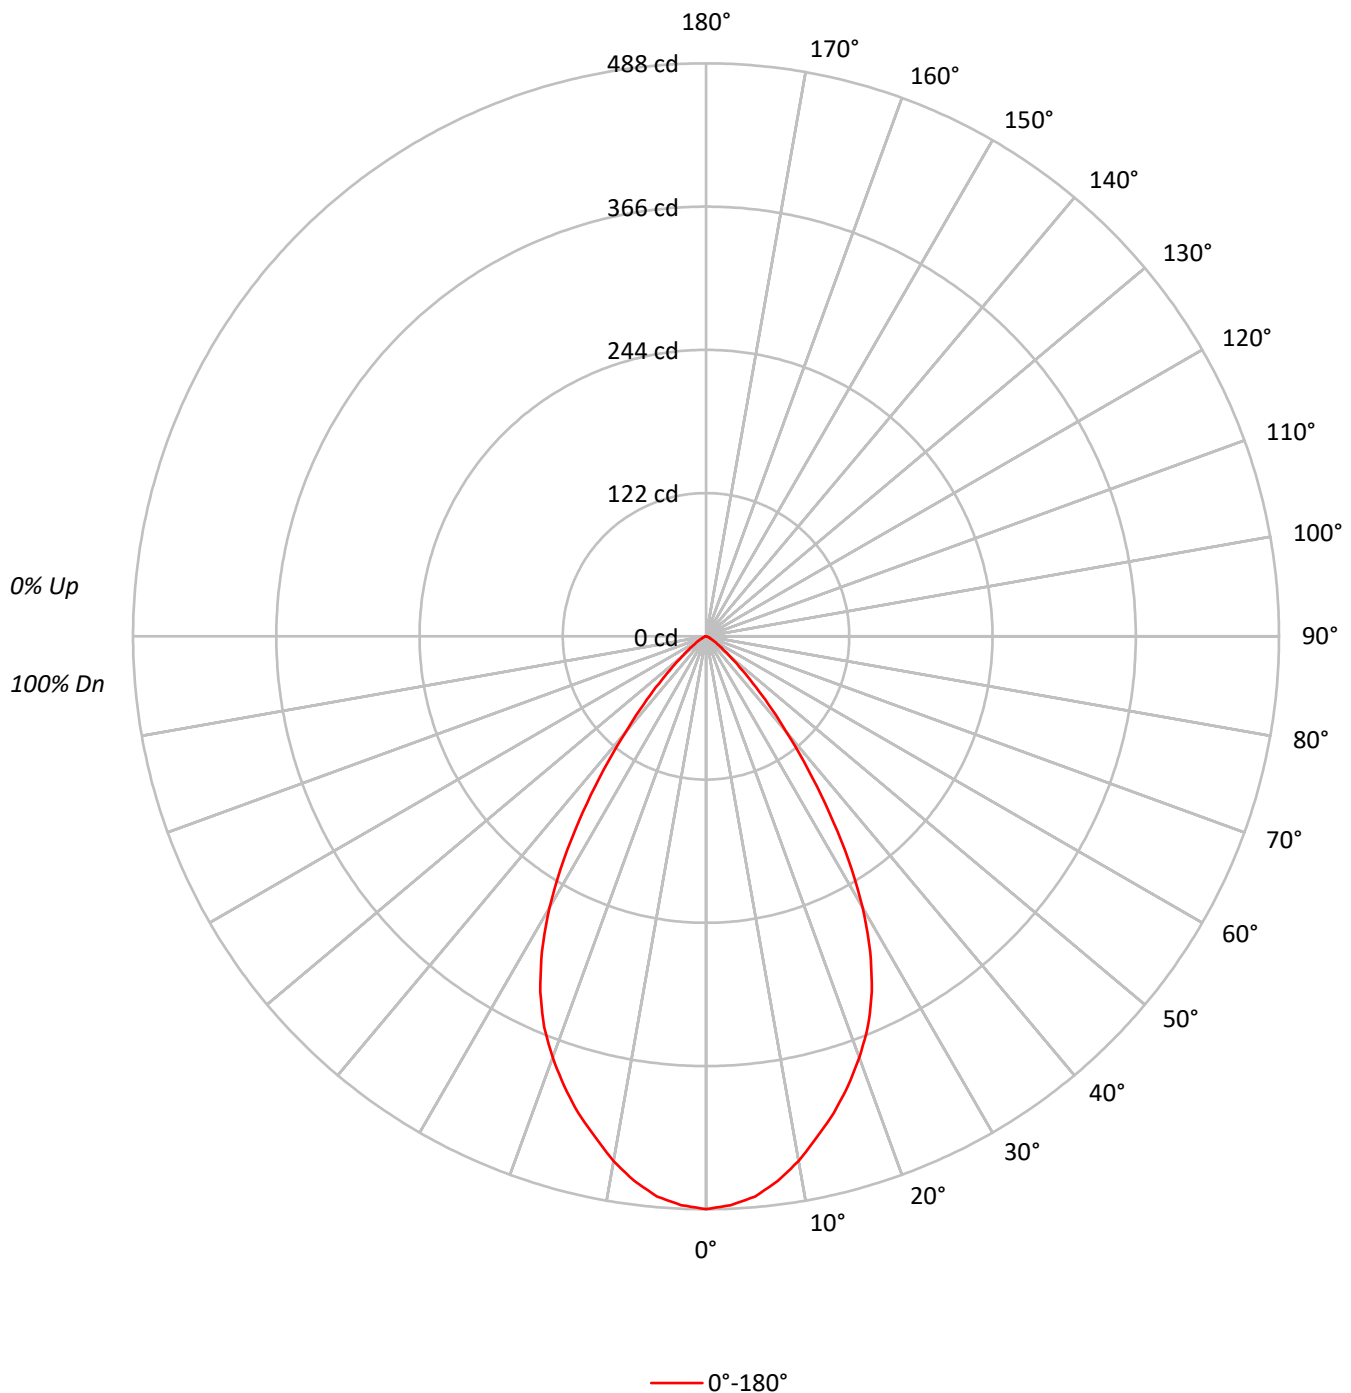



TEST NUMBER: P727282

CATALOG NUMBER: MRI-DRV-FLD4C-05-L930 F4LC-M-X-H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |    | 20 |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |    | 10 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |
| 1   | 113 | 110 | 108 | 105 | 111 | 108 | 106 | 104 | 104 | 102 | 100 | 100 | 99  | 97  | 97  | 96  | 95  | 93  |    |    |
| 2   | 107 | 102 | 98  | 94  | 105 | 100 | 96  | 93  | 97  | 94  | 91  | 94  | 91  | 89  | 91  | 89  | 87  | 85  |    |    |
| 3   | 101 | 94  | 89  | 85  | 99  | 93  | 88  | 84  | 90  | 86  | 83  | 88  | 84  | 82  | 86  | 83  | 80  | 79  |    |    |
| 4   | 96  | 88  | 82  | 77  | 94  | 86  | 81  | 77  | 84  | 80  | 76  | 82  | 78  | 75  | 80  | 77  | 74  | 73  |    |    |
| 5   | 90  | 82  | 75  | 71  | 89  | 81  | 75  | 70  | 79  | 74  | 70  | 77  | 73  | 69  | 75  | 72  | 69  | 67  |    |    |
| 6   | 86  | 76  | 70  | 65  | 84  | 75  | 69  | 65  | 74  | 68  | 64  | 72  | 68  | 64  | 71  | 67  | 64  | 62  |    |    |
| 7   | 81  | 71  | 65  | 60  | 80  | 70  | 64  | 60  | 69  | 64  | 60  | 68  | 63  | 59  | 67  | 62  | 59  | 58  |    |    |
| 8   | 77  | 67  | 60  | 56  | 75  | 66  | 60  | 56  | 65  | 59  | 56  | 64  | 59  | 55  | 63  | 58  | 55  | 54  |    |    |
| 9   | 73  | 63  | 56  | 52  | 72  | 62  | 56  | 52  | 61  | 56  | 52  | 60  | 55  | 52  | 59  | 55  | 52  | 50  |    |    |
| 10  | 69  | 59  | 53  | 49  | 68  | 59  | 53  | 49  | 58  | 52  | 49  | 57  | 52  | 48  | 56  | 52  | 48  | 47  |    |    |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 59928 |
| 5°  | 59059 |
| 10° | 56598 |
| 15° | 53457 |
| 20° | 49903 |
| 25° | 45289 |
| 30° | 37820 |
| 35° | 27401 |
| 40° | 17144 |
| 45° | 9799  |
| 50° | 5103  |
| 55° | 2870  |
| 60° | 1818  |
| 65° | 1076  |
| 70° | 790   |
| 75° | 332   |
| 80° | 495   |
| 85° | 0     |



TEST NUMBER: P727282

CATALOG NUMBER: MRI-DRV-FLD4C-05-L930 F4LC-M-X-H

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 44.9   | 9.1       |
| 10°-20°   | 117.8  | 23.9      |
| 20°-30°   | 151.3  | 30.8      |
| 30°-40°   | 113.9  | 23.1      |
| 40°-50°   | 45.7   | 9.3       |
| 50°-60°   | 13.0   | 2.6       |
| 60°-70°   | 4.1    | 0.8       |
| 70°-80°   | 1.1    | 0.2       |
| 80°-90°   | 0.1    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 314.0  | 63.8      |
| 0°-40°    | 427.9  | 87.0      |
| 0°-60°    | 486.6  | 98.9      |
| 0°-90°    | 492.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 492.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 488 |      |
| 5°  | 479 | 45   |
| 15° | 420 | 118  |
| 25° | 334 | 151  |
| 35° | 183 | 114  |
| 45° | 56  | 46   |
| 55° | 13  | 13   |
| 65° | 4   | 4    |
| 75° | 1   | 1    |
| 85° | 0   | 0    |
| 90° | 0   |      |



TEST NUMBER: P727282

CATALOG NUMBER: MRI-DRV-FLD4C-05-L930 F4LC-M-X-H

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 487.8 |
| 2.5°  | 484.9 |
| 5°    | 478.9 |
| 7.5°  | 467.8 |
| 10°   | 453.7 |
| 12.5° | 436.6 |
| 15°   | 420.3 |
| 17.5° | 401.7 |
| 20°   | 381.7 |
| 22.5° | 360.1 |
| 25°   | 334.1 |
| 27.5° | 302.9 |
| 30°   | 266.6 |
| 32.5° | 225.7 |
| 35°   | 182.7 |
| 37.5° | 142.6 |
| 40°   | 106.9 |
| 42.5° | 78.7  |
| 45°   | 56.4  |
| 47.5° | 38.6  |
| 50°   | 26.7  |
| 52.5° | 18.6  |
| 55°   | 13.4  |
| 57.5° | 9.7   |
| 60°   | 7.4   |
| 62.5° | 5.2   |
| 65°   | 3.7   |
| 67.5° | 3.0   |
| 70°   | 2.2   |
| 72.5° | 1.5   |
| 75°   | 0.7   |
| 77.5° | 0.7   |
| 80°   | 0.7   |
| 82.5° | 0.0   |
| 85°   | 0.0   |
| 87.5° | 0.0   |
| 90°   | 0.0   |

(END OF REPORT)